

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1245728

Luminaire Tested: P3AS02R359024DE010 E3DLD1WMH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1245728
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-18)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS02R359024DE010 E3DLD1WMH
Description: 3in Adjustable LED luminaire with, R35 optic, 2400K CCT AND, 90CRI , E3DLD1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 174.0 lumens
Efficiency: N/A
Efficacy: 48.3 lumens/watt
Spacing Criteria (0/90/45): 0.8 / 0.8 / 0.87
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 3.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1245728

CATALOG NUMBER: P3AS02R359024DE010 E3DLD1WMH

Luminous Intensity Polar Plot

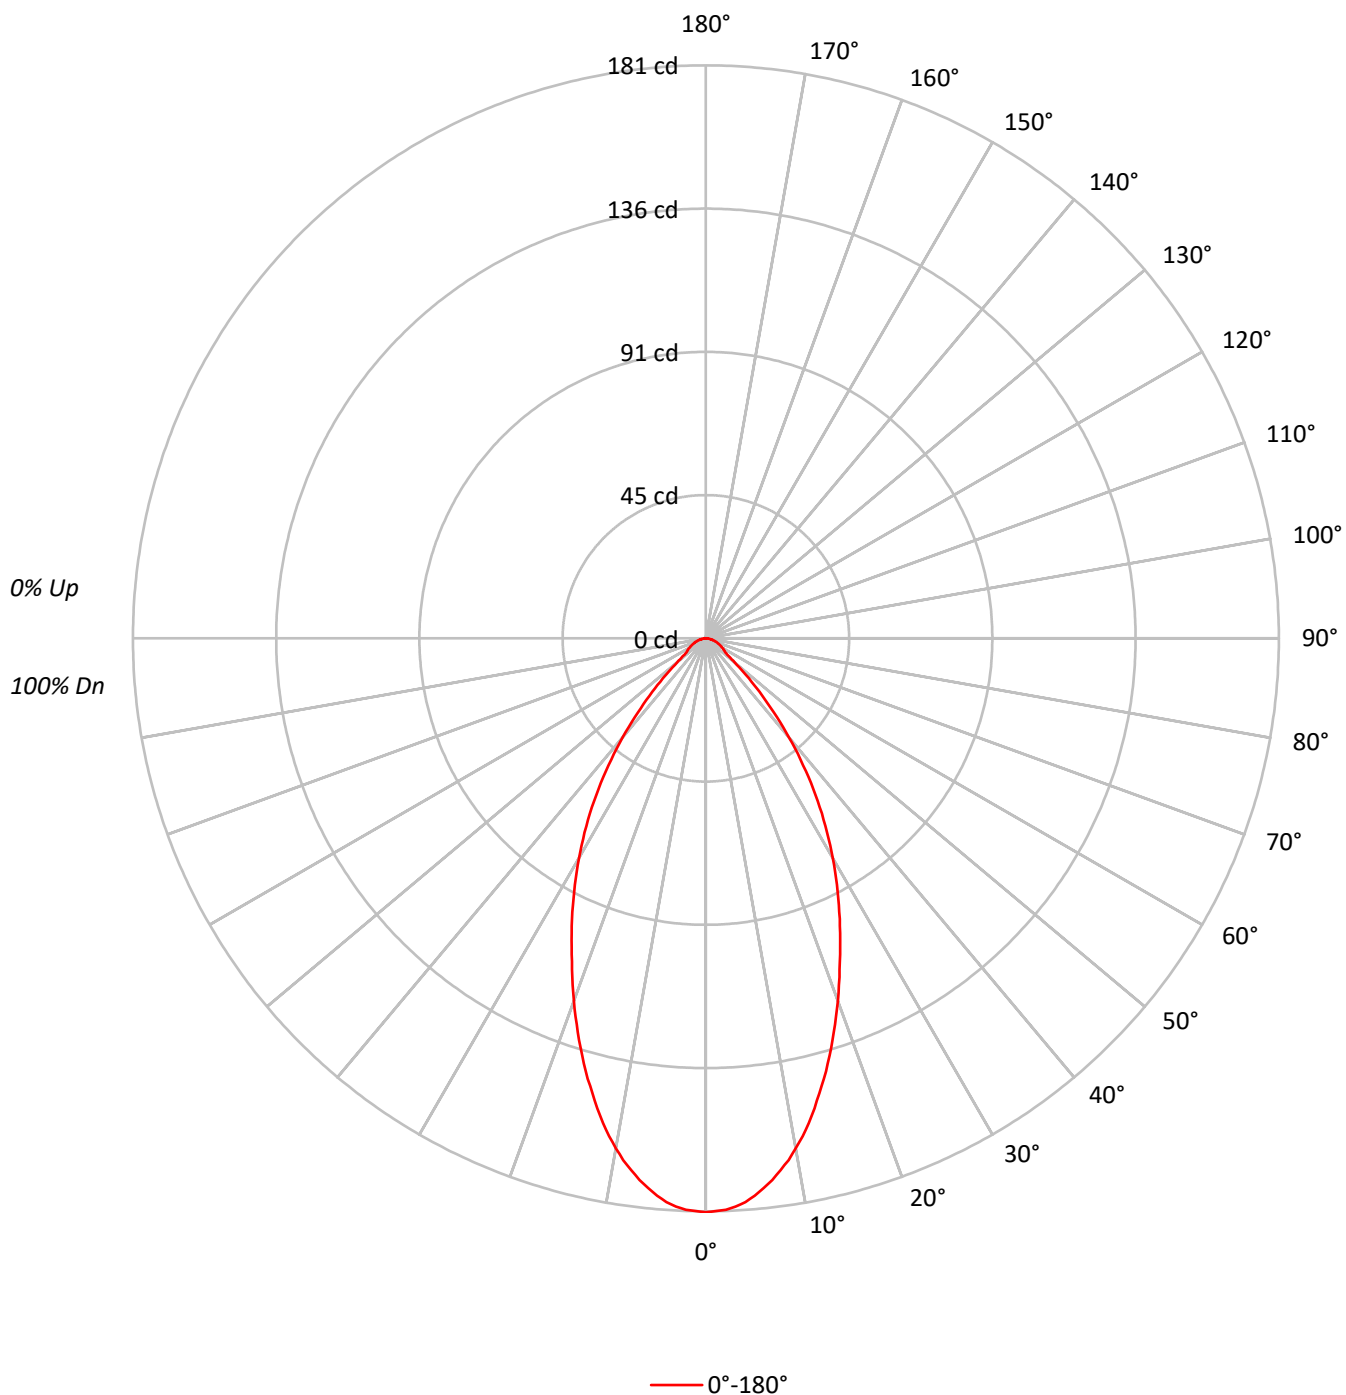

TEST NUMBER: P1245728

CATALOG NUMBER: P3AS02R359024DE010 E3DLD1WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	112	109	106	104	110	107	104	102	103	101	99		99	98	96		96
2	106	100	96	92	104	98	94	91	95	92	89		92	89	87		89
3	100	92	87	82	98	91	86	81	88	84	80		86	82	79		83
4	94	85	79	74	92	84	78	74	82	77	73		80	75	72		78
5	89	79	73	68	87	78	72	67	76	71	67		75	70	66		73
6	84	74	67	62	82	73	67	62	71	66	61		70	65	61		68
7	79	69	62	57	78	68	62	57	67	61	57		65	60	57		64
8	75	64	58	53	74	64	57	53	63	57	53		62	56	53		61
9	71	60	54	50	70	60	54	50	59	53	49		58	53	49		57
10	67	57	51	46	66	56	50	46	56	50	46		55	50	46		54

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	39756
5°	38895
10°	36428
15°	32713
20°	28446
25°	24243
30°	20307
35°	16169
40°	11708
45°	7412
50°	4025
55°	2791
60°	2631
65°	2439
70°	2372
75°	2033
80°	1894
85°	1510

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 7412 cd/sqm

TEST NUMBER: P1245728

CATALOG NUMBER: P3AS02R359024DE010 E3DLD1WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	16.4	9.5
10°-20°	40.1	23.0
20°-30°	45.9	26.4
30°-40°	37.5	21.5
40°-50°	18.9	10.9
50°-60°	7.0	4.0
60°-70°	4.7	2.7
70°-80°	2.6	1.5
80°-90°	0.8	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	102.5	58.9
0°-40°	140.0	80.4
0°-60°	165.9	95.3
0°-90°	174.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	174.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	181	
5°	177	16
15°	144	40
25°	100	46
35°	60	37
45°	24	19
55°	7	7
65°	5	5
75°	2	3
85°	1	1
90°	0	

TEST NUMBER: P1245728

CATALOG NUMBER: P3AS02R359024DE010 E3DLD1WMH

CANDELA DISTRIBUTION (FULL):

0°	
0°	181.3
1°	181.0
2°	180.6
3°	179.8
4°	178.5
5°	176.7
6°	174.6
7°	172.4
8°	169.6
9°	166.9
10°	163.6
11°	160.2
12°	156.5
13°	152.4
14°	148.1
15°	144.1
17.5°	133.1
20°	121.9
22.5°	110.5
25°	100.2
27.5°	90.1
30°	80.2
32.5°	70.3
35°	60.4
37.5°	50.5
40°	40.9
42.5°	31.8
45°	23.9
47.5°	17.2
50°	11.8
52.5°	8.6
55°	7.3
57.5°	6.7
60°	6.0
62.5°	5.4
65°	4.7
67.5°	4.1
70°	3.7
72.5°	3.0
75°	2.4
77.5°	1.9
80°	1.5
82.5°	1.1
85°	0.6
87.5°	0.4



TEST NUMBER: P1245728

CATALOG NUMBER: P3AS02R359024DE010 E3DLD1WMH

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)