

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1245786

Luminaire Tested: P3AS02R459024DE010 E3DLP1GPH

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1245786  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-25)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS02R459024DE010 E3DLP1GPH  
Description: 3in Adjustable LED luminaire with, R45 optic, 2400K CCT AND, 90CRI , E3DLP1GPH TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 76.0 lumens  
Efficiency: N/A  
Efficacy: 21.1 lumens/watt  
Spacing Criteria (0/90/45): 0.73 / 0.73 / 0.76  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 3.6  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1245786  
CATALOG NUMBER: P3AS02R459024DE010 E3DLP1GPH

### Luminous Intensity Polar Plot

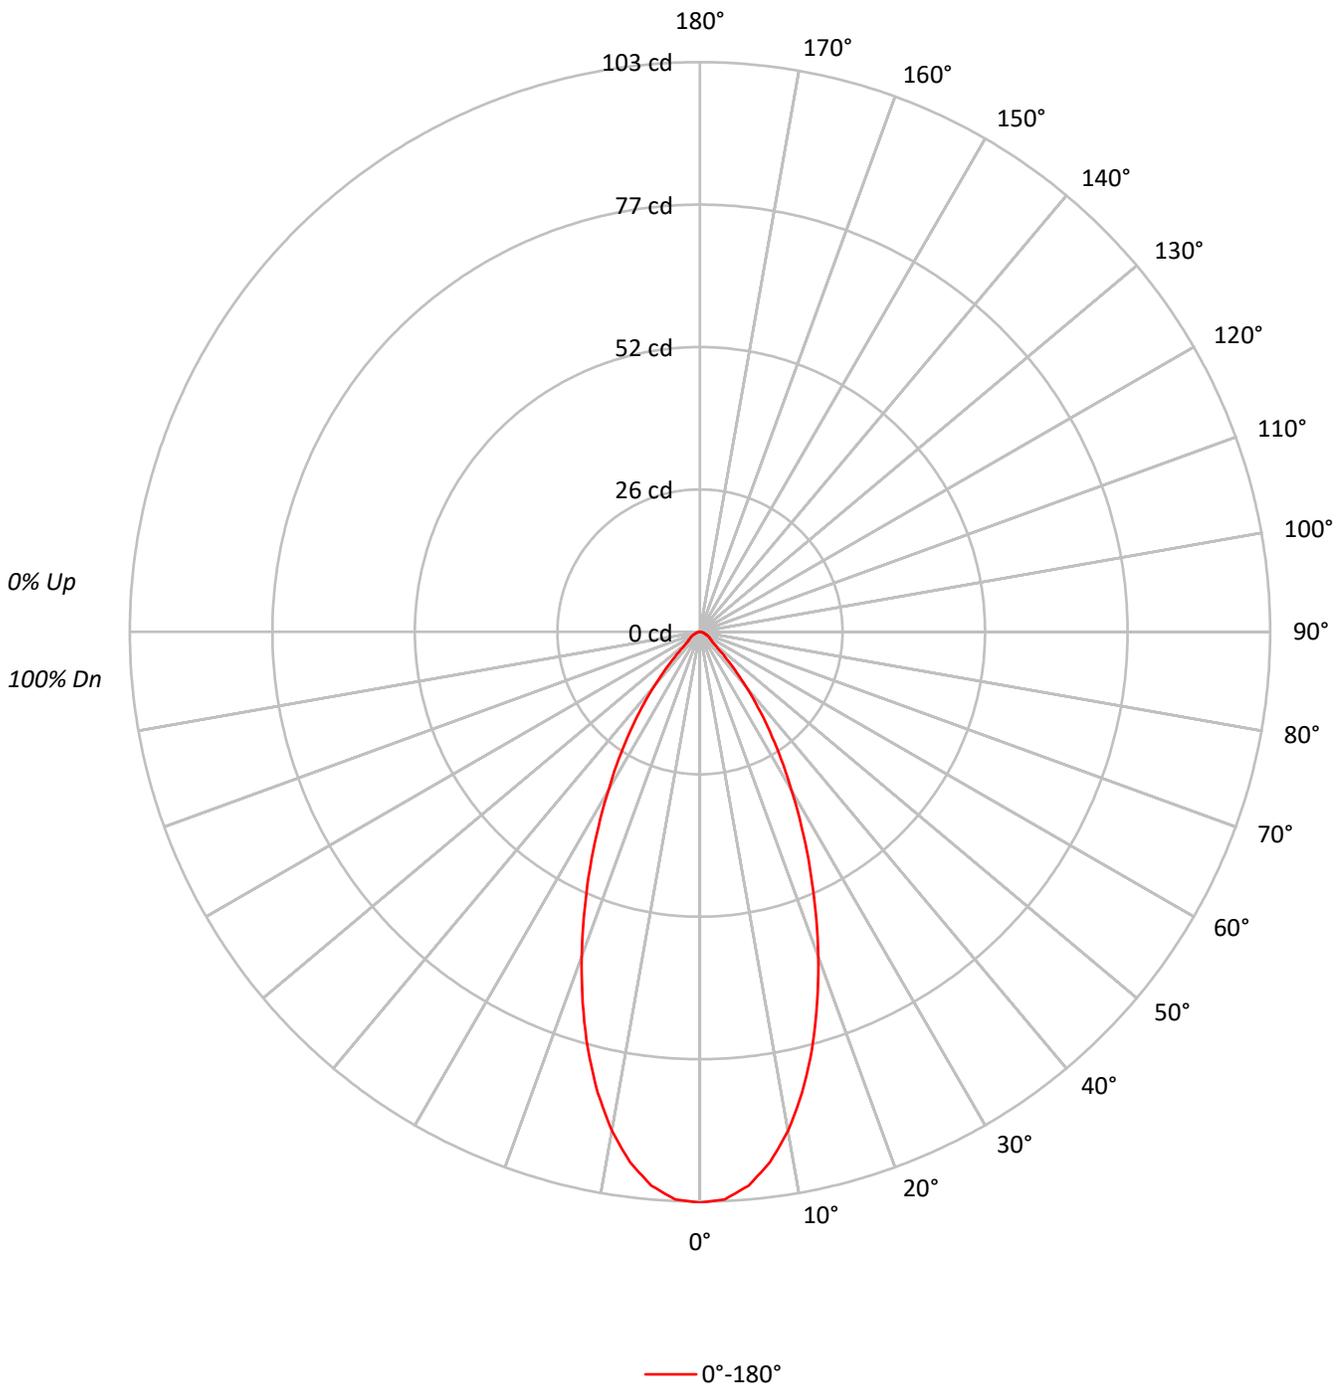



TEST NUMBER: P1245786  
 CATALOG NUMBER: P3AS02R459024DE010 E3DLP1GPH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	113	110	108	105	111	108	106	103	104	102	100	100	99	97	97	96	94	93				93
2	107	102	98	94	105	100	96	93	97	94	91	94	91	89	91	89	87	86				86
3	102	95	90	86	100	93	89	85	91	87	83	88	85	82	86	83	81	79				79
4	96	88	83	78	94	87	82	78	85	81	77	83	79	76	81	78	75	74				74
5	91	83	77	72	90	82	76	72	80	75	71	78	74	71	77	73	70	69				69
6	87	78	72	67	85	77	71	67	75	70	66	74	69	66	73	69	66	64				64
7	83	73	67	63	81	72	67	63	71	66	62	70	65	62	69	65	62	60				60
8	79	69	63	59	77	68	63	59	67	62	58	66	62	58	65	61	58	56				56
9	75	65	59	55	74	65	59	55	64	59	55	63	58	55	62	58	55	53				53
10	72	62	56	52	71	61	56	52	61	55	52	60	55	52	59	55	52	50				50

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	22630
5°	22122
10°	20396
15°	17753
20°	14585
25°	11347
30°	8381
35°	5889
40°	3693
45°	1985
50°	1092
55°	918
60°	833
65°	726
70°	577
75°	593
80°	505
85°	503

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 1985 cd/sqm



TEST NUMBER: P1245786  
 CATALOG NUMBER: P3AS02R459024DE010 E3DLP1GPH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	9.3	12.2
10°-20°	21.6	28.4
20°-30°	21.5	28.2
30°-40°	13.8	18.2
40°-50°	5.3	7.0
50°-60°	2.2	2.8
60°-70°	1.4	1.8
70°-80°	0.7	0.9
80°-90°	0.2	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	52.4	68.9
0°-40°	66.2	87.1
0°-60°	73.7	97.0
0°-90°	76.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	76.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	103	
5°	100	9
15°	78	22
25°	47	21
35°	22	14
45°	6	5
55°	2	2
65°	1	1
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P1245786  
CATALOG NUMBER: P3AS02R459024DE010 E3DLP1GPH

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	103.2
2.5°	102.7
5°	100.5
7.5°	96.7
10°	91.6
12.5°	85.3
15°	78.2
17.5°	70.4
20°	62.5
22.5°	54.5
25°	46.9
27.5°	39.7
30°	33.1
32.5°	27.3
35°	22.0
37.5°	17.3
40°	12.9
42.5°	9.3
45°	6.4
47.5°	4.3
50°	3.2
52.5°	2.6
55°	2.4
57.5°	2.1
60°	1.9
62.5°	1.6
65°	1.4
67.5°	1.2
70°	0.9
72.5°	0.8
75°	0.7
77.5°	0.5
80°	0.4
82.5°	0.3
85°	0.2
87.5°	0.1
90°	0.0

(END OF REPORT)