

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1246021

Luminaire Tested: P3AS05R159024DE010 E3DLD1WMH

Issue Date: 1/30/2026

**Test Information**

Test Method: LM-79-2019  
Report Number: P1246021  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-2)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS05R159024DE010 E3DLD1WMH  
Description: 3in Adjustable LED luminaire with, R15 optic, 2400K CCT AND, 90CRI , E3DLD1WMH TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 349.0 lumens  
Efficiency: N/A  
Efficacy: 48.5 lumens/watt  
Spacing Criteria (0/90/45): 0.75 / 0.75 / 0.82  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct

Input Watts (W): 7.2  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1246021

CATALOG NUMBER: P3AS05R159024DE010 E3DLD1WMH

### Luminous Intensity Polar Plot

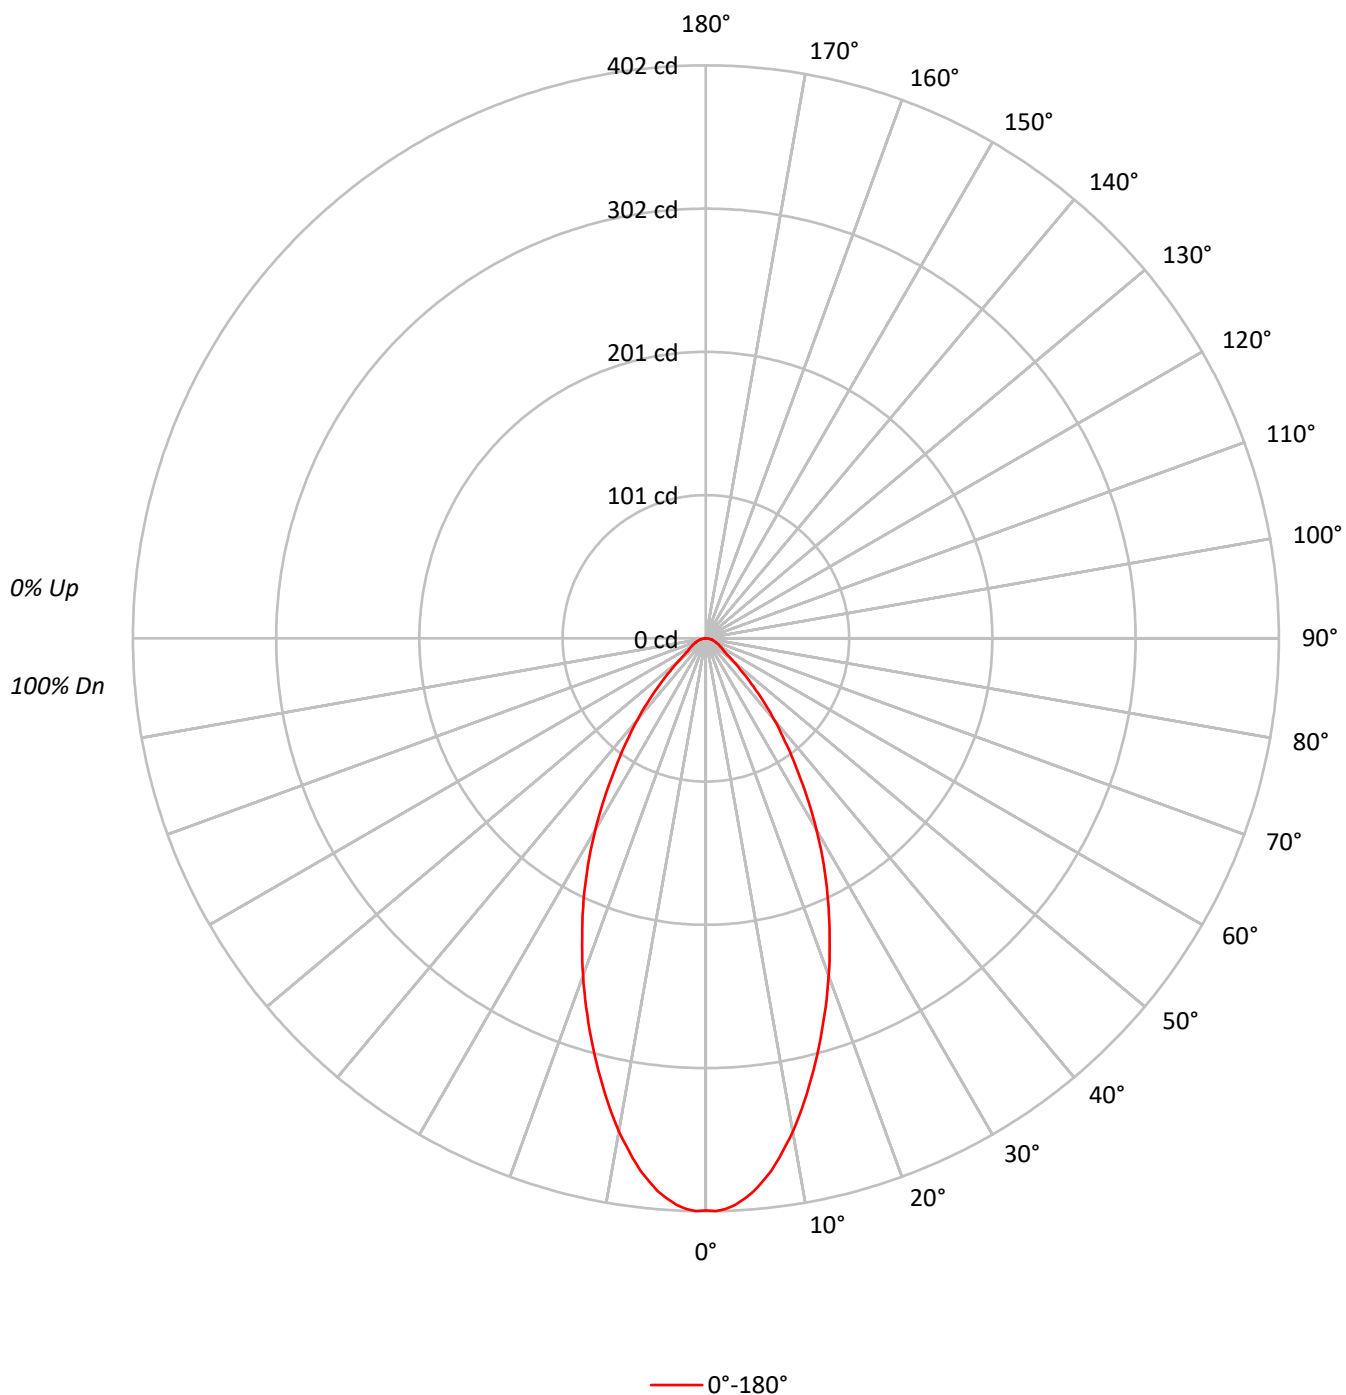

TEST NUMBER: P1246021

CATALOG NUMBER: P3AS05R159024DE010 E3DLD1WMH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|
| RF  | 20  |     |     |     | 20  |     |     |     |     | 20  |     |     |     |     | 20  |     |     |     |    | 20 |
| RC  | 80  |     |     |     | 70  |     |     |     |     | 50  |     |     |     |     | 30  |     |     |     |    | 10 |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30 | 10 |
| RCR |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 |    |    |
| 1   | 113 | 109 | 107 | 104 | 110 | 107 | 105 | 102 | 103 | 101 | 99  | 99  | 98  | 96  | 96  | 95  | 93  | 92  |    |    |
| 2   | 106 | 100 | 96  | 92  | 104 | 99  | 95  | 91  | 95  | 92  | 89  | 92  | 90  | 87  | 90  | 87  | 85  | 83  |    |    |
| 3   | 100 | 93  | 87  | 83  | 98  | 91  | 86  | 82  | 89  | 84  | 81  | 86  | 82  | 79  | 84  | 81  | 78  | 76  |    |    |
| 4   | 94  | 86  | 80  | 75  | 92  | 85  | 79  | 74  | 82  | 77  | 73  | 80  | 76  | 73  | 78  | 75  | 72  | 70  |    |    |
| 5   | 89  | 80  | 73  | 68  | 87  | 79  | 73  | 68  | 77  | 72  | 67  | 75  | 71  | 67  | 74  | 69  | 66  | 65  |    |    |
| 6   | 84  | 74  | 68  | 63  | 83  | 73  | 67  | 63  | 72  | 66  | 62  | 70  | 66  | 62  | 69  | 65  | 61  | 60  |    |    |
| 7   | 80  | 69  | 63  | 58  | 78  | 69  | 63  | 58  | 67  | 62  | 58  | 66  | 61  | 57  | 65  | 61  | 57  | 56  |    |    |
| 8   | 76  | 65  | 59  | 54  | 74  | 65  | 58  | 54  | 63  | 58  | 54  | 62  | 57  | 54  | 61  | 57  | 53  | 52  |    |    |
| 9   | 72  | 61  | 55  | 51  | 71  | 61  | 55  | 51  | 60  | 54  | 50  | 59  | 54  | 50  | 58  | 53  | 50  | 49  |    |    |
| 10  | 68  | 58  | 52  | 48  | 67  | 57  | 51  | 47  | 57  | 51  | 47  | 56  | 51  | 47  | 55  | 50  | 47  | 46  |    |    |

**AVERAGE LUMINANCE (cd/sqm):**

|     |       |
|-----|-------|
|     | 0°    |
| 0°  | 88041 |
| 5°  | 85648 |
| 10° | 78266 |
| 15° | 68559 |
| 20° | 58805 |
| 25° | 49092 |
| 30° | 39297 |
| 35° | 29473 |
| 40° | 21383 |
| 45° | 13986 |
| 50° | 8733  |
| 55° | 5926  |
| 60° | 5219  |
| 65° | 4825  |
| 70° | 4552  |
| 75° | 4151  |
| 80° | 3915  |
| 85° | 3271  |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
Vertical Angle: 45°  
Luminance: 13986 cd/sqm

TEST NUMBER: P1246021

CATALOG NUMBER: P3AS05R159024DE010 E3DLD1WMH

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 35.9   | 10.3      |
| 10°-20°   | 84.1   | 24.1      |
| 20°-30°   | 92.7   | 26.6      |
| 30°-40°   | 69.4   | 19.9      |
| 40°-50°   | 36.0   | 10.3      |
| 50°-60°   | 14.9   | 4.3       |
| 60°-70°   | 9.2    | 2.7       |
| 70°-80°   | 5.2    | 1.5       |
| 80°-90°   | 1.5    | 0.4       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| 0°-30°    | 212.8  | 61.0      |
| 0°-40°    | 282.2  | 80.9      |
| 0°-60°    | 333.0  | 95.4      |
| 0°-90°    | 349.0  | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 349.0  | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°  | Flux |
|-----|-----|------|
| 0°  | 402 |      |
| 5°  | 389 | 36   |
| 15° | 302 | 84   |
| 25° | 203 | 93   |
| 35° | 110 | 69   |
| 45° | 45  | 36   |
| 55° | 16  | 15   |
| 65° | 9   | 9    |
| 75° | 5   | 5    |
| 85° | 1   | 1    |
| 90° | 0   |      |

TEST NUMBER: P1246021

CATALOG NUMBER: P3AS05R159024DE010 E3DLD1WMH

**CANDELA DISTRIBUTION (FULL):**

| 0°    |       |
|-------|-------|
| 0°    | 401.5 |
| 1°    | 401.9 |
| 2°    | 400.6 |
| 3°    | 397.9 |
| 4°    | 393.9 |
| 5°    | 389.1 |
| 6°    | 382.9 |
| 7°    | 376.3 |
| 8°    | 368.3 |
| 9°    | 359.9 |
| 10°   | 351.5 |
| 12.5° | 327.2 |
| 15°   | 302.0 |
| 17.5° | 276.8 |
| 20°   | 252.0 |
| 22.5° | 226.8 |
| 25°   | 202.9 |
| 27.5° | 179.1 |
| 30°   | 155.2 |
| 32.5° | 131.8 |
| 35°   | 110.1 |
| 37.5° | 91.5  |
| 40°   | 74.7  |
| 42.5° | 59.2  |
| 45°   | 45.1  |
| 47.5° | 34.0  |
| 50°   | 25.6  |
| 52.5° | 19.0  |
| 55°   | 15.5  |
| 57.5° | 13.7  |
| 60°   | 11.9  |
| 62.5° | 10.6  |
| 65°   | 9.3   |
| 67.5° | 8.0   |
| 70°   | 7.1   |
| 72.5° | 5.7   |
| 75°   | 4.9   |
| 77.5° | 4.0   |
| 80°   | 3.1   |
| 82.5° | 2.2   |
| 85°   | 1.3   |
| 87.5° | 0.4   |
| 90°   | 0.0   |

(END OF REPORT)