

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1246061

Luminaire Tested: P3AS05R259024DE010 E3CD1MMS

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1246061
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-12)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R259024DE010 E3CD1MMS
Description: 3in Adjustable LED luminaire with, R25 optic, 2400K CCT AND, 90CRI , E3CD1MMS TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 562.0 lumens
Efficiency: N/A
Efficacy: 78.1 lumens/watt
Spacing Criteria (0/90/45): 0.45 / 0.45 / 0.41
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1246061

CATALOG NUMBER: P3AS05R259024DE010 E3CD1MMS

Luminous Intensity Polar Plot

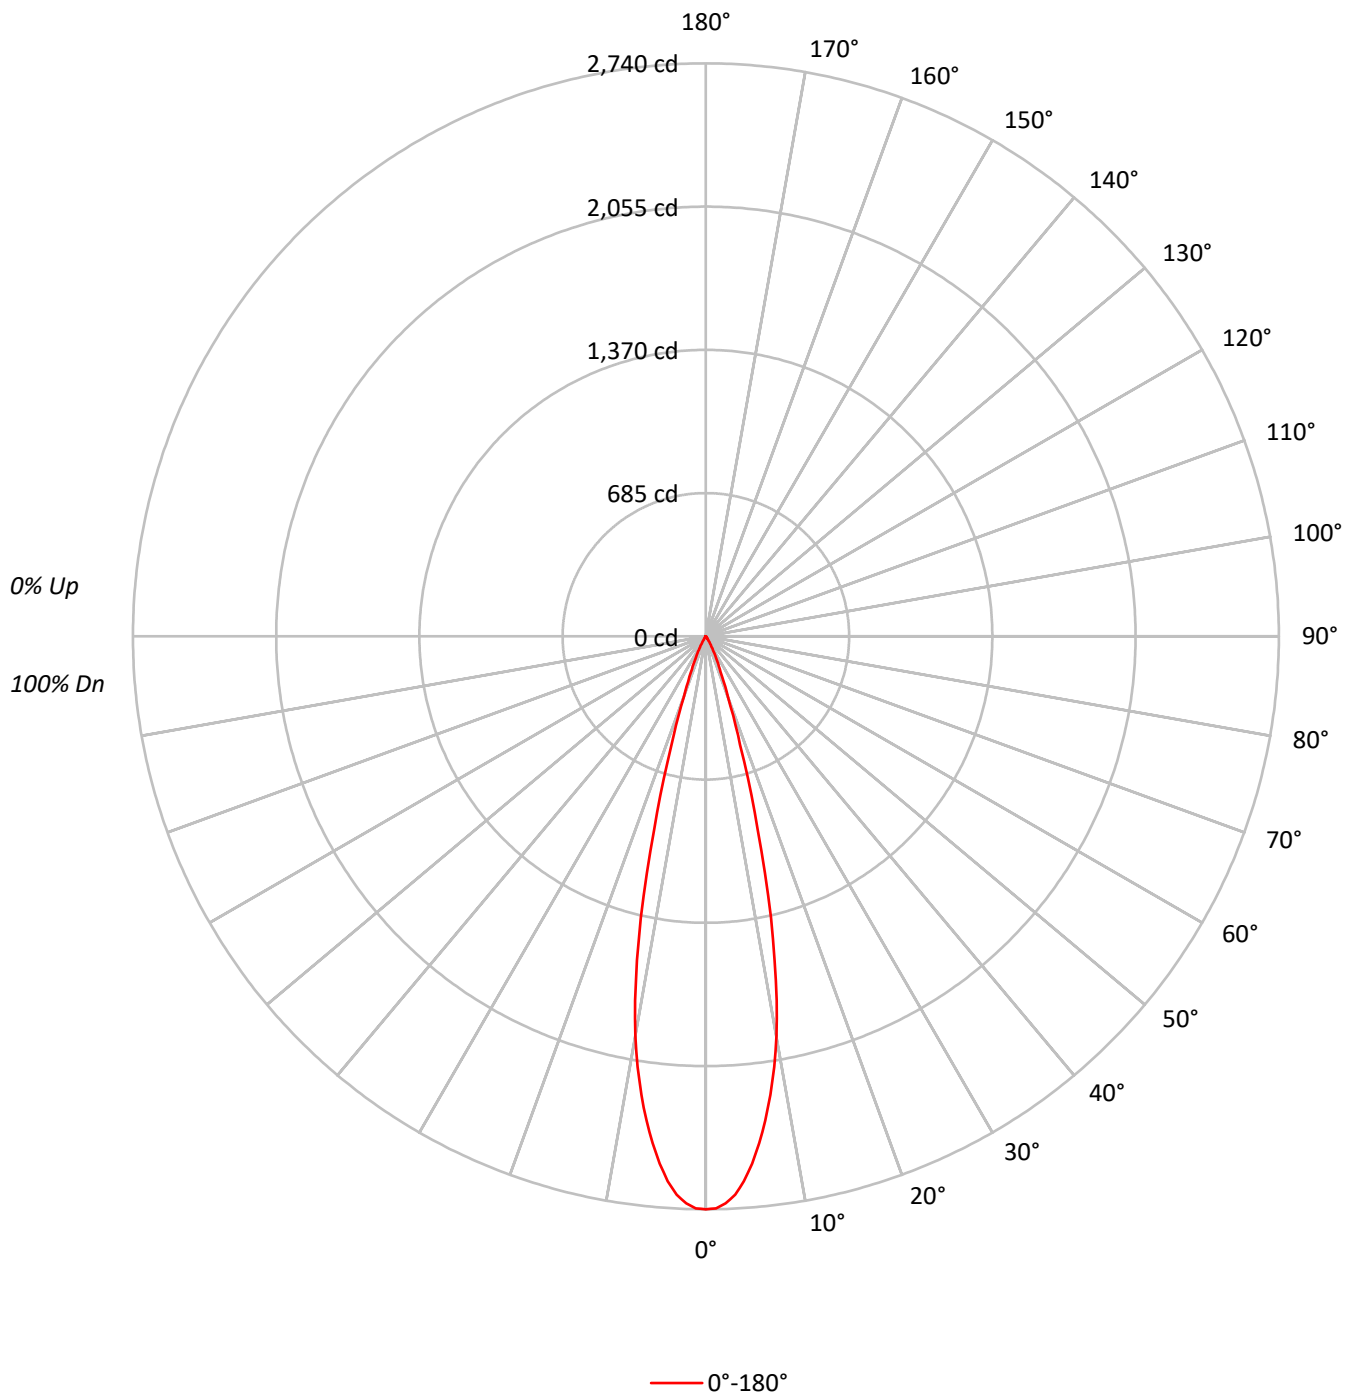

TEST NUMBER: P1246061

CATALOG NUMBER: P3AS05R259024DE010 E3CD1MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	99	99
1	115	113	111	110	113	111	109	108	107	106	105	103	103	102	100	99	99	97	96	96
2	112	108	105	103	110	107	104	102	104	102	100	101	99	98	98	97	96	94	93	93
3	108	104	101	98	107	103	100	97	100	98	96	98	96	94	96	94	93	92	91	91
4	105	100	97	94	104	99	96	93	97	95	92	96	93	91	94	92	90	89	88	88
5	103	97	93	90	101	96	93	90	95	92	89	93	91	89	92	90	88	87	86	86
6	100	94	90	87	99	93	90	87	92	89	87	91	88	86	90	87	86	85	84	84
7	97	91	88	85	96	91	87	85	90	87	84	89	86	84	88	85	83	83	82	82
8	95	89	85	83	94	89	85	82	88	84	82	87	84	82	86	83	81	81	80	80
9	93	87	83	80	92	86	83	80	86	82	80	85	82	80	84	82	80	79	78	78
10	91	85	81	78	90	84	81	78	84	80	78	83	80	78	82	80	78	77	76	76

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	600851
5°	557273
10°	432190
15°	216710
20°	71196
25°	28308
30°	10609
35°	3078
40°	1403
45°	558
50°	443
55°	344
60°	395
65°	467
70°	256
75°	339
80°	505
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 558 cd/sqm

TEST NUMBER: P1246061

CATALOG NUMBER: P3AS05R259024DE010 E3CD1MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	222.7	39.6
10°-20°	265.7	47.3
20°-30°	59.9	10.7
30°-40°	9.7	1.7
40°-50°	1.8	0.3
50°-60°	0.9	0.2
60°-70°	0.8	0.1
70°-80°	0.4	0.1
80°-90°	0.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	548.3	97.6
0°-40°	558.0	99.3
0°-60°	560.7	99.8
0°-90°	562.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	562.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2740	
5°	2532	223
15°	955	266
25°	117	60
35°	12	10
45°	2	2
55°	1	1
65°	1	1
75°	0	0
85°	0	0
90°	0	

TEST NUMBER: P1246061

CATALOG NUMBER: P3AS05R259024DE010 E3CD1MMS

CANDELA DISTRIBUTION (FULL):

0°	
0°	2740.1
1°	2735.7
2°	2713.6
3°	2673.0
4°	2611.7
5°	2531.7
6°	2436.4
7°	2333.0
8°	2214.7
9°	2085.3
10°	1941.0
11°	1774.5
12°	1582.9
13°	1382.4
14°	1167.4
15°	954.6
17.5°	544.0
20°	305.1
22.5°	184.1
25°	117.0
27.5°	72.0
30°	41.9
32.5°	22.1
35°	11.5
37.5°	7.5
40°	4.9
42.5°	3.1
45°	1.8
47.5°	1.3
50°	1.3
52.5°	1.3
55°	0.9
57.5°	0.9
60°	0.9
62.5°	0.9
65°	0.9
67.5°	0.9
70°	0.4
72.5°	0.4
75°	0.4
77.5°	0.4
80°	0.4
82.5°	0.0
85°	0.0
87.5°	0.0



TEST NUMBER: P1246061
CATALOG NUMBER: P3AS05R259024DE010 E3CD1MMS

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)