

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1246167

Luminaire Tested: P3AS05R409024DE010 E3DLD1H

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1246167
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-22)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R409024DE010 E3DLD1H
Description: 3in Adjustable LED luminaire with, R40 optic, 2400K CCT AND, 90CRI , E3DLD1H TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 395.0 lumens
Efficiency: N/A
Efficacy: 54.9 lumens/watt
Spacing Criteria (0/90/45): 0.83 / 0.83 / 0.88
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1246167
CATALOG NUMBER: P3AS05R409024DE010 E3DLD1H

Luminous Intensity Polar Plot

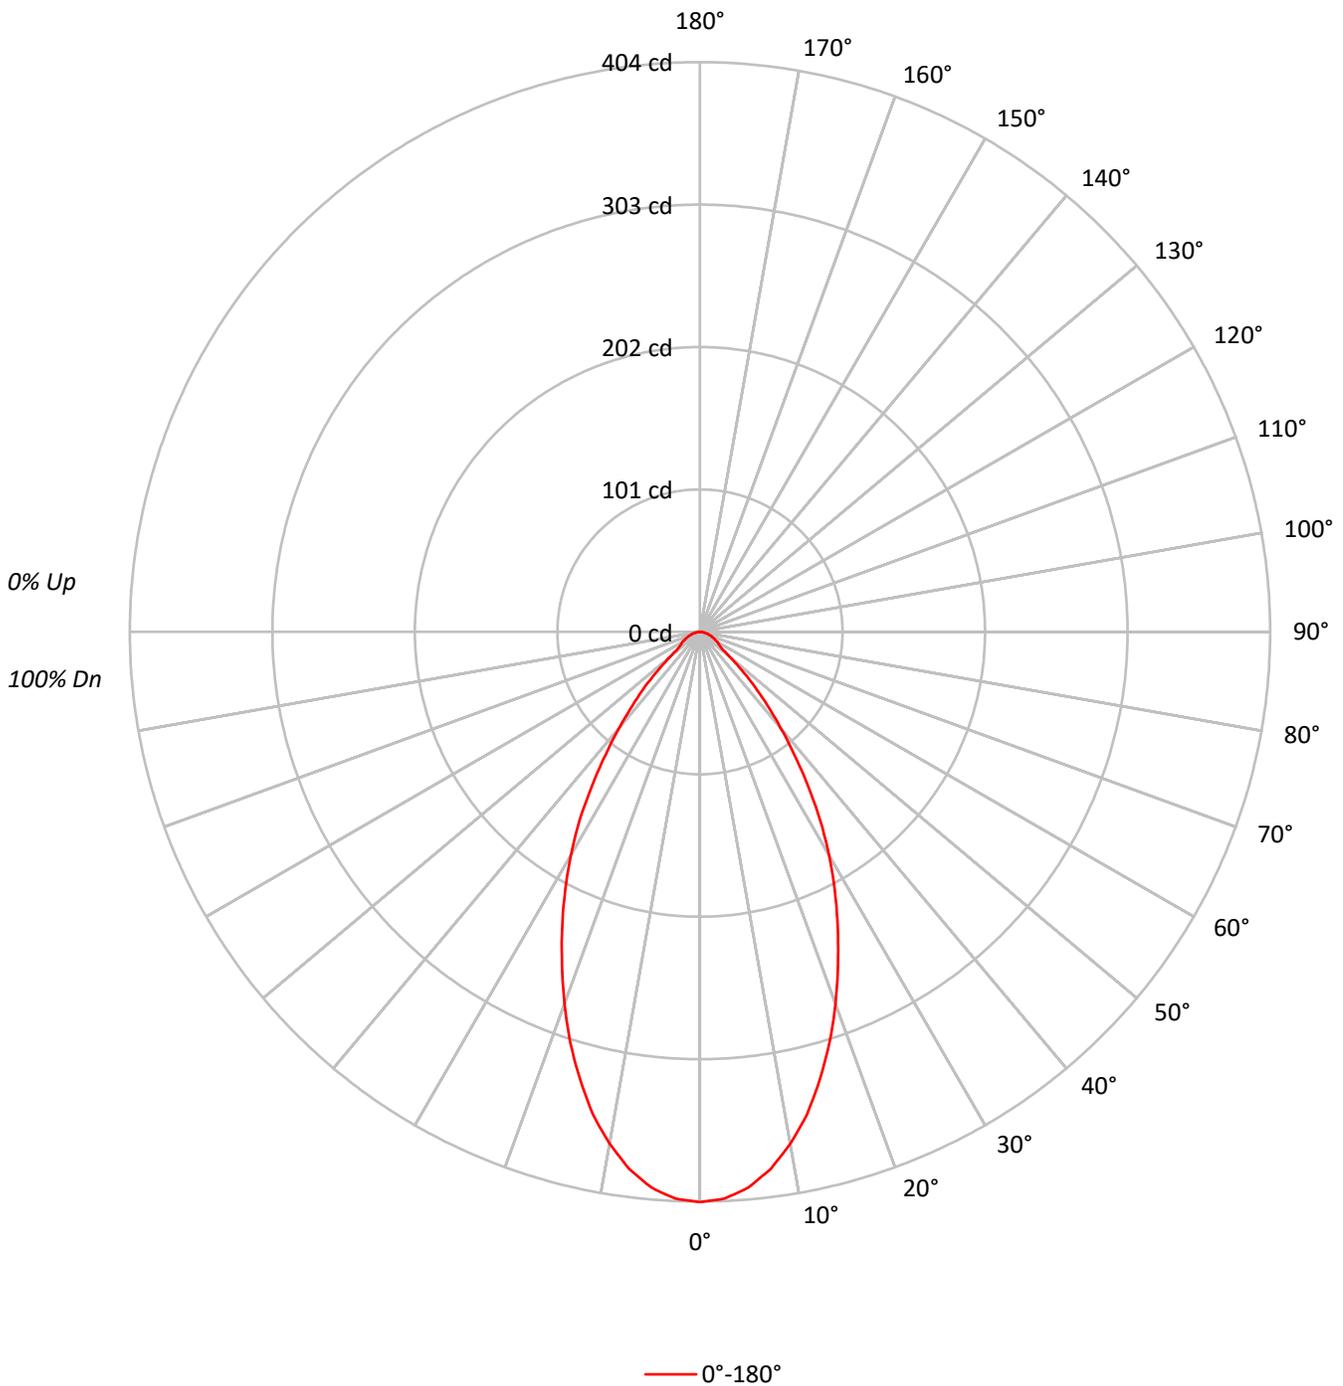



TEST NUMBER: P1246167
 CATALOG NUMBER: P3AS05R409024DE010 E3DLD1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	112	109	106	104	110	107	104	102	103	101	99	99	98	96	96	94	93	91			91
2	106	100	96	92	104	98	94	91	95	92	89	92	89	87	89	87	85	83			83
3	100	92	87	82	98	91	86	81	88	84	80	86	82	79	83	80	78	76			76
4	94	85	79	74	92	84	78	74	82	77	73	80	75	72	78	74	71	69			69
5	89	79	73	68	87	78	72	67	76	71	67	75	70	66	73	69	66	64			64
6	84	74	67	62	82	73	67	62	71	66	61	70	65	61	68	64	61	59			59
7	79	69	62	57	78	68	62	57	67	61	57	65	60	57	64	60	56	55			55
8	75	64	58	53	74	64	58	53	63	57	53	62	56	53	61	56	52	51			51
9	71	60	54	50	70	60	54	50	59	53	49	58	53	49	57	52	49	48			48
10	67	57	51	46	66	56	50	46	56	50	46	55	50	46	54	49	46	45			45

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	88677
5°	87057
10°	82074
15°	74552
20°	65479
25°	55915
30°	46336
35°	35737
40°	25419
45°	17118
50°	9347
55°	6576
60°	6184
65°	5707
70°	5129
75°	4829
80°	3915
85°	3271

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 17118 cd/sqm



TEST NUMBER: P1246167
 CATALOG NUMBER: P3AS05R409024DE010 E3DLD1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	36.9	9.3
10°-20°	91.5	23.2
20°-30°	105.7	26.8
30°-40°	83.3	21.1
40°-50°	42.8	10.8
50°-60°	16.4	4.1
60°-70°	10.8	2.7
70°-80°	5.9	1.5
80°-90°	1.8	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	234.1	59.3
0°-40°	317.4	80.4
0°-60°	376.5	95.3
0°-90°	395.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	395.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	404	
5°	396	37
15°	328	91
25°	231	106
35°	134	83
45°	55	43
55°	17	16
65°	11	11
75°	6	6
85°	1	2
90°	0	



TEST NUMBER: P1246167
CATALOG NUMBER: P3AS05R409024DE010 E3DLD1H

CANDELA DISTRIBUTION (FULL):

	0°
0°	404.4
2.5°	402.2
5°	395.5
7.5°	384.0
10°	368.6
12.5°	350.4
15°	328.4
17.5°	305.4
20°	280.6
22.5°	255.4
25°	231.1
27.5°	206.8
30°	183.0
32.5°	158.7
35°	133.5
37.5°	110.0
40°	88.8
42.5°	70.7
45°	55.2
47.5°	40.2
50°	27.4
52.5°	19.9
55°	17.2
57.5°	15.5
60°	14.1
62.5°	12.4
65°	11.0
67.5°	9.3
70°	8.0
72.5°	6.6
75°	5.7
77.5°	4.4
80°	3.1
82.5°	2.7
85°	1.3
87.5°	0.9
90°	0.0

(END OF REPORT)