

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1246212

Luminaire Tested: P3AS05R509024DE010 E3D1WH

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1246212
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-13)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R509024DE010 E3D1WH
Description: 3in Adjustable LED luminaire with, R50 optic, 2400K CCT AND, 90CRI , E3D1WH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 612.9 lumens
Efficiency: N/A
Efficacy: 85.1 lumens/watt
Spacing Criteria (0/90/45): 0.82 / 0.82 / 0.77
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1246212

CATALOG NUMBER: P3AS05R509024DE010 E3D1WH

Luminous Intensity Polar Plot

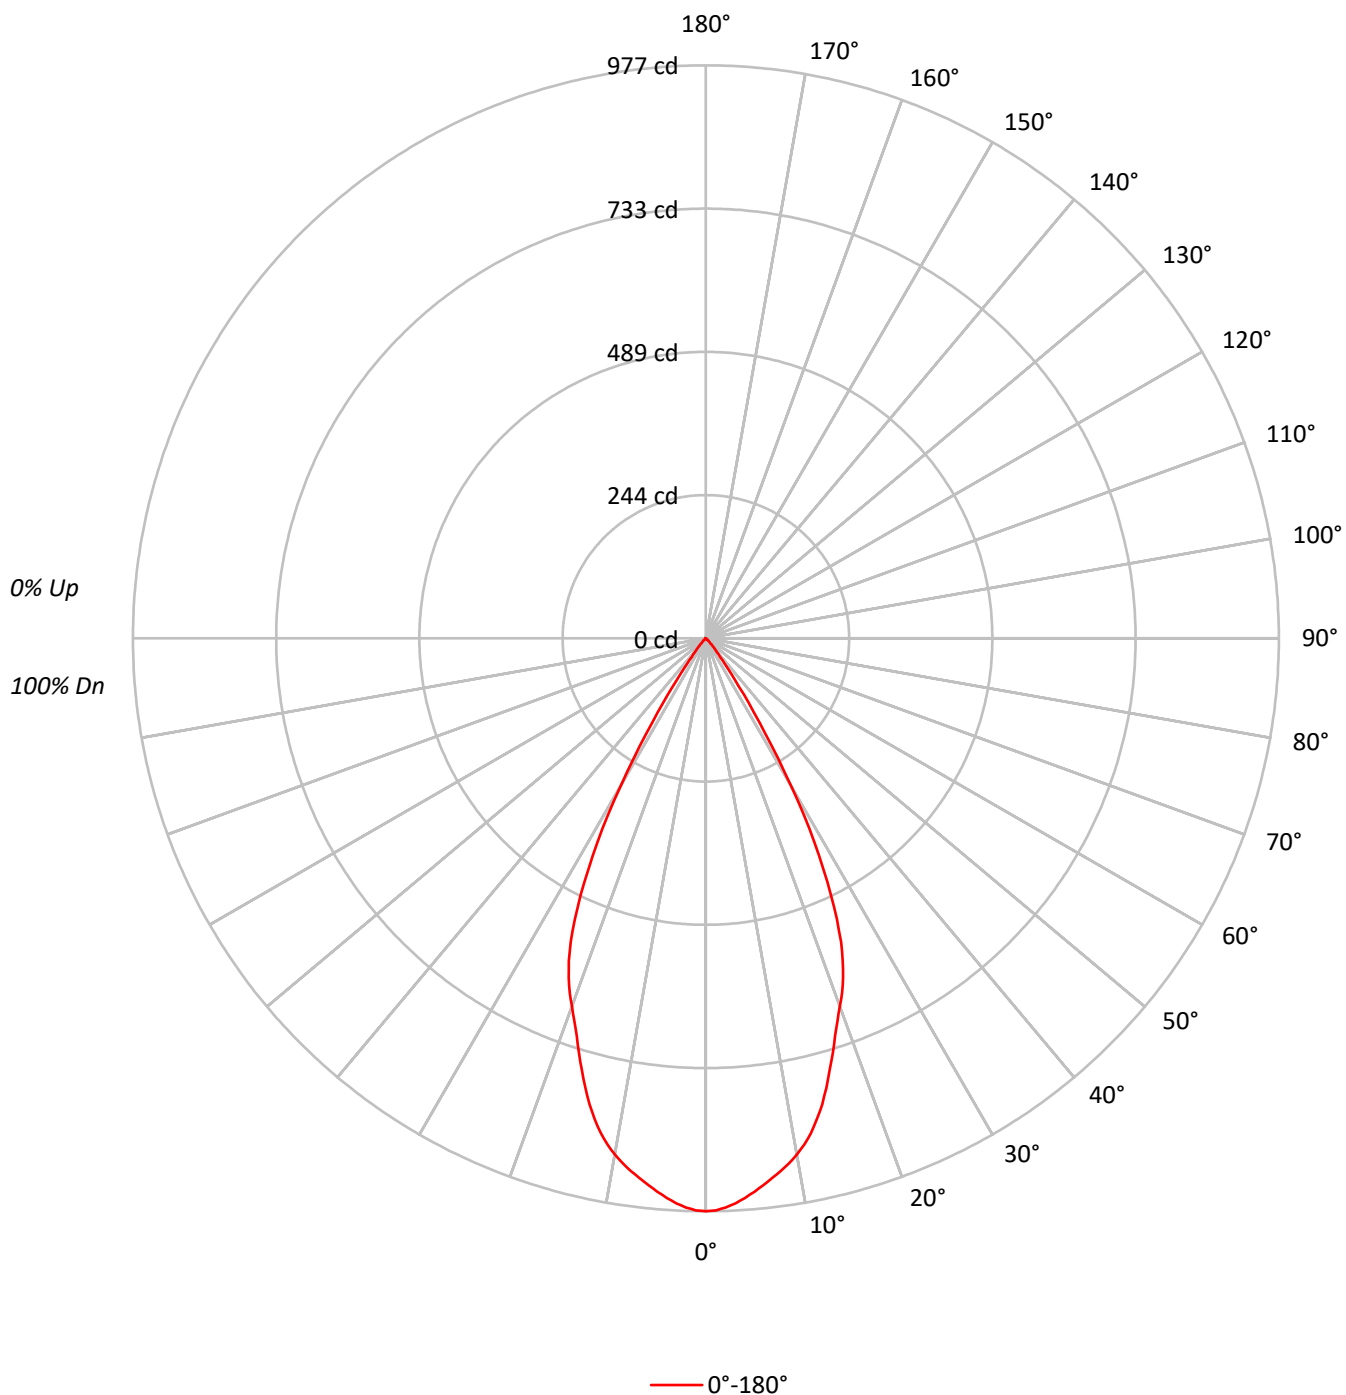

TEST NUMBER: P1246212

CATALOG NUMBER: P3AS05R509024DE010 E3D1WH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	112	109	107	112	110	108	106	105	104	102		102	101	99		98
2	109	105	101	98	107	103	100	97	100	97	95		97	95	93		94
3	105	99	95	91	103	98	94	90	95	92	89		93	90	88		91
4	100	94	89	85	99	92	88	85	90	87	84		88	85	83		87
5	96	89	84	80	94	88	83	79	86	82	79		84	81	78		83
6	92	84	79	75	91	83	78	75	82	78	74		81	77	74		79
7	88	80	75	71	87	79	74	71	78	74	70		77	73	70		76
8	84	76	71	67	83	76	71	67	75	70	67		74	69	66		73
9	81	73	67	64	80	72	67	64	71	67	63		70	66	63		70
10	78	69	64	61	77	69	64	61	68	64	60		67	63	60		67

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	214215
5°	208518
10°	198994
15°	180137
20°	155857
25°	127846
30°	73429
35°	22807
40°	6126
45°	2140
50°	512
55°	153
60°	88
65°	104
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 2140 cd/sqm

TEST NUMBER: P1246212

CATALOG NUMBER: P3AS05R509024DE010 E3D1WH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	88.7	14.5
10°-20°	219.9	35.9
20°-30°	231.1	37.7
30°-40°	66.1	10.8
40°-50°	6.5	1.1
50°-60°	0.5	0.1
60°-70°	0.2	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	539.7	88.0
0°-40°	605.8	98.8
0°-60°	612.8	100.0
0°-90°	612.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	612.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	977	
5°	947	89
15°	794	220
25°	528	231
35°	85	66
45°	7	6
55°	0	0
65°	0	0
75°	0	0
85°	0	0
90°	0	

TEST NUMBER: P1246212

CATALOG NUMBER: P3AS05R509024DE010 E3D1WH

CANDELA DISTRIBUTION (FULL):

0°	
0°	976.9
1°	975.4
2°	971.1
3°	964.8
4°	956.4
5°	947.3
6°	937.6
7°	927.2
8°	917.4
9°	906.2
10°	893.7
11°	879.2
12°	862.5
13°	841.7
14°	819.3
15°	793.5
16°	766.3
17°	739.9
18°	712.8
19°	689.1
20°	667.9
21°	647.5
22°	624.4
23°	597.8
24°	566.6
25°	528.4
26°	486.8
27°	440.6
28°	394.5
29°	344.7
30°	290.0
31°	238.8
32°	191.6
32.5°	171.1
33°	150.3
34°	115.3
35°	85.2
36°	62.5
37°	46.5
37.5°	40.2
38°	34.8
39°	27.0
40°	21.4
42.5°	12.1
45°	6.9

TEST NUMBER: P1246212

CATALOG NUMBER: P3AS05R509024DE010 E3D1WH

CANDELA DISTRIBUTION (continued):

	0°
47.5°	3.9
50°	1.5
52.5°	0.6
55°	0.4
57.5°	0.4
60°	0.2
62.5°	0.2
65°	0.2
67.5°	0.2
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)