

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1246457

Luminaire Tested: P3AS09R259024DE010 E3DLD1WMH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1246457
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-10)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS09R259024DE010 E3DLD1WMH
Description: 3in Adjustable LED luminaire with, R25 optic, 2400K CCT AND, 90CRI , E3DLD1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 518.0 lumens
Efficiency: N/A
Efficacy: 46.7 lumens/watt
Spacing Criteria (0/90/45): 0.78 / 0.78 / 0.85
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 11.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1246457

CATALOG NUMBER: P3AS09R259024DE010 E3DLD1WMH

Luminous Intensity Polar Plot

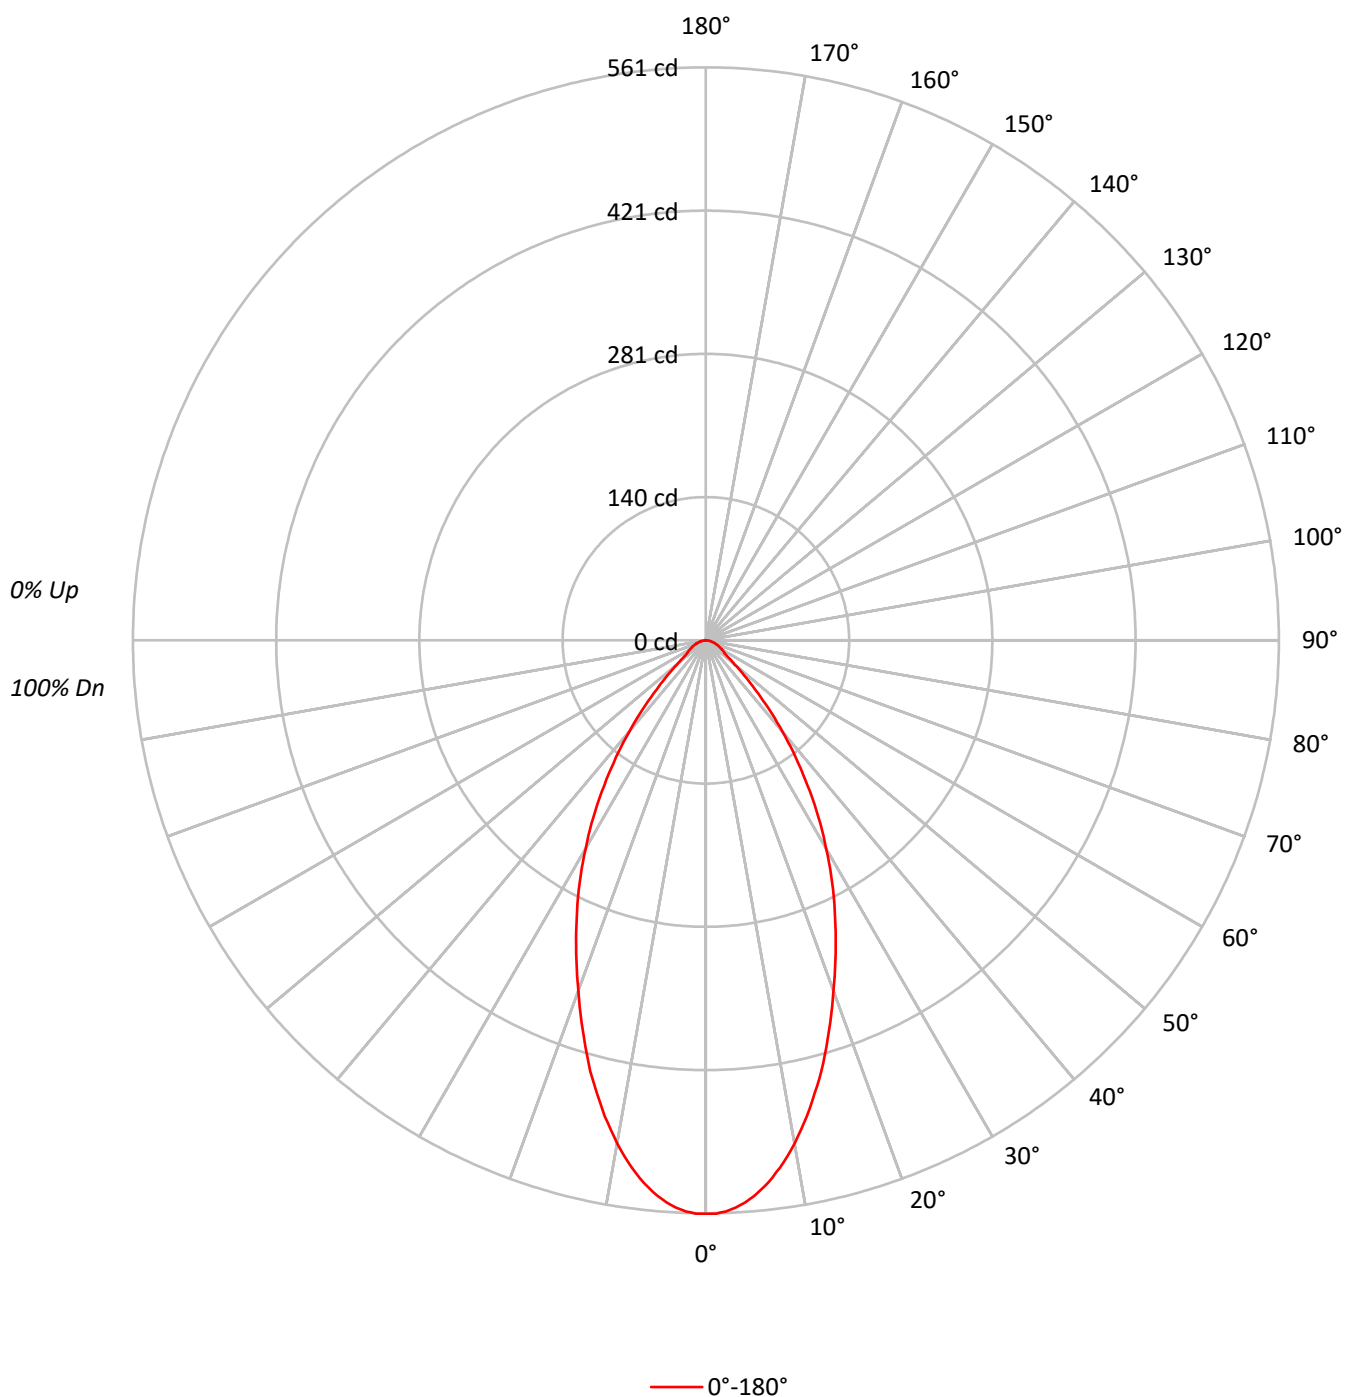

TEST NUMBER: P1246457

CATALOG NUMBER: P3AS09R259024DE010 E3DLD1WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	112	109	106	104	110	107	105	102	103	101	99		99	98	96		96
2	106	100	96	92	104	99	94	91	95	92	89		92	89	87		89
3	100	92	87	82	98	91	86	82	88	84	80		86	82	79		83
4	94	85	79	74	92	84	78	74	82	77	73		80	76	72		78
5	89	79	73	68	87	78	72	68	76	71	67		75	70	66		73
6	84	74	67	62	82	73	67	62	71	66	62		70	65	61		69
7	79	69	62	58	78	68	62	58	67	61	57		66	61	57		65
8	75	65	58	54	74	64	58	53	63	57	53		62	57	53		61
9	71	61	54	50	70	60	54	50	59	54	50		58	53	50		57
10	68	57	51	47	67	57	51	47	56	50	47		55	50	46		54

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	123104
5°	120163
10°	111354
15°	99183
20°	85244
25°	72440
30°	59629
35°	46471
40°	33434
45°	21212
50°	12554
55°	8640
60°	7938
65°	7368
70°	6604
75°	6015
80°	5683
85°	4780

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 21212 cd/sqm

TEST NUMBER: P1246457

CATALOG NUMBER: P3AS09R259024DE010 E3DLD1WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	50.6	9.8
10°-20°	121.3	23.4
20°-30°	137.0	26.5
30°-40°	108.4	20.9
40°-50°	54.8	10.6
50°-60°	21.9	4.2
60°-70°	14.0	2.7
70°-80°	7.7	1.5
80°-90°	2.2	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	308.9	59.6
0°-40°	417.3	80.6
0°-60°	494.0	95.4
0°-90°	518.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	518.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	561	
5°	546	51
15°	437	121
25°	299	137
35°	174	108
45°	68	55
55°	23	22
65°	14	14
75°	7	8
85°	2	2
90°	0	

TEST NUMBER: P1246457

CATALOG NUMBER: P3AS09R259024DE010 E3DLD1WMH

CANDELA DISTRIBUTION (FULL):

0°	
0°	561.4
1°	561.4
2°	559.5
3°	556.3
4°	551.7
5°	545.9
6°	538.8
7°	530.5
8°	521.4
9°	511.1
10°	500.1
11°	487.9
12°	476.2
13°	462.7
14°	449.8
15°	436.9
17.5°	400.7
20°	365.3
22.5°	331.7
25°	299.4
27.5°	267.8
30°	235.5
32.5°	205.2
35°	173.6
37.5°	144.6
40°	116.8
42.5°	91.0
45°	68.4
47.5°	51.0
50°	36.8
52.5°	27.7
55°	22.6
57.5°	20.7
60°	18.1
62.5°	16.1
65°	14.2
67.5°	12.3
70°	10.3
72.5°	9.0
75°	7.1
77.5°	5.8
80°	4.5
82.5°	3.2
85°	1.9
87.5°	0.6



TEST NUMBER: P1246457

CATALOG NUMBER: P3AS09R259024DE010 E3DLD1WMH

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)