

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1246688

Luminaire Tested: P3AS09R659024DE010 E3DLD1MW

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1246688
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-42)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS09R659024DE010 E3DLD1MW
Description: 3in Adjustable LED luminaire with, R65 optic, 2400K CCT AND, 90CRI , E3DLD1MW TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 508.0 lumens
Efficiency: N/A
Efficacy: 45.8 lumens/watt
Spacing Criteria (0/90/45): 0.94 / 0.94 / 1
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 11.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1246688

CATALOG NUMBER: P3AS09R659024DE010 E3DLD1MW

Luminous Intensity Polar Plot

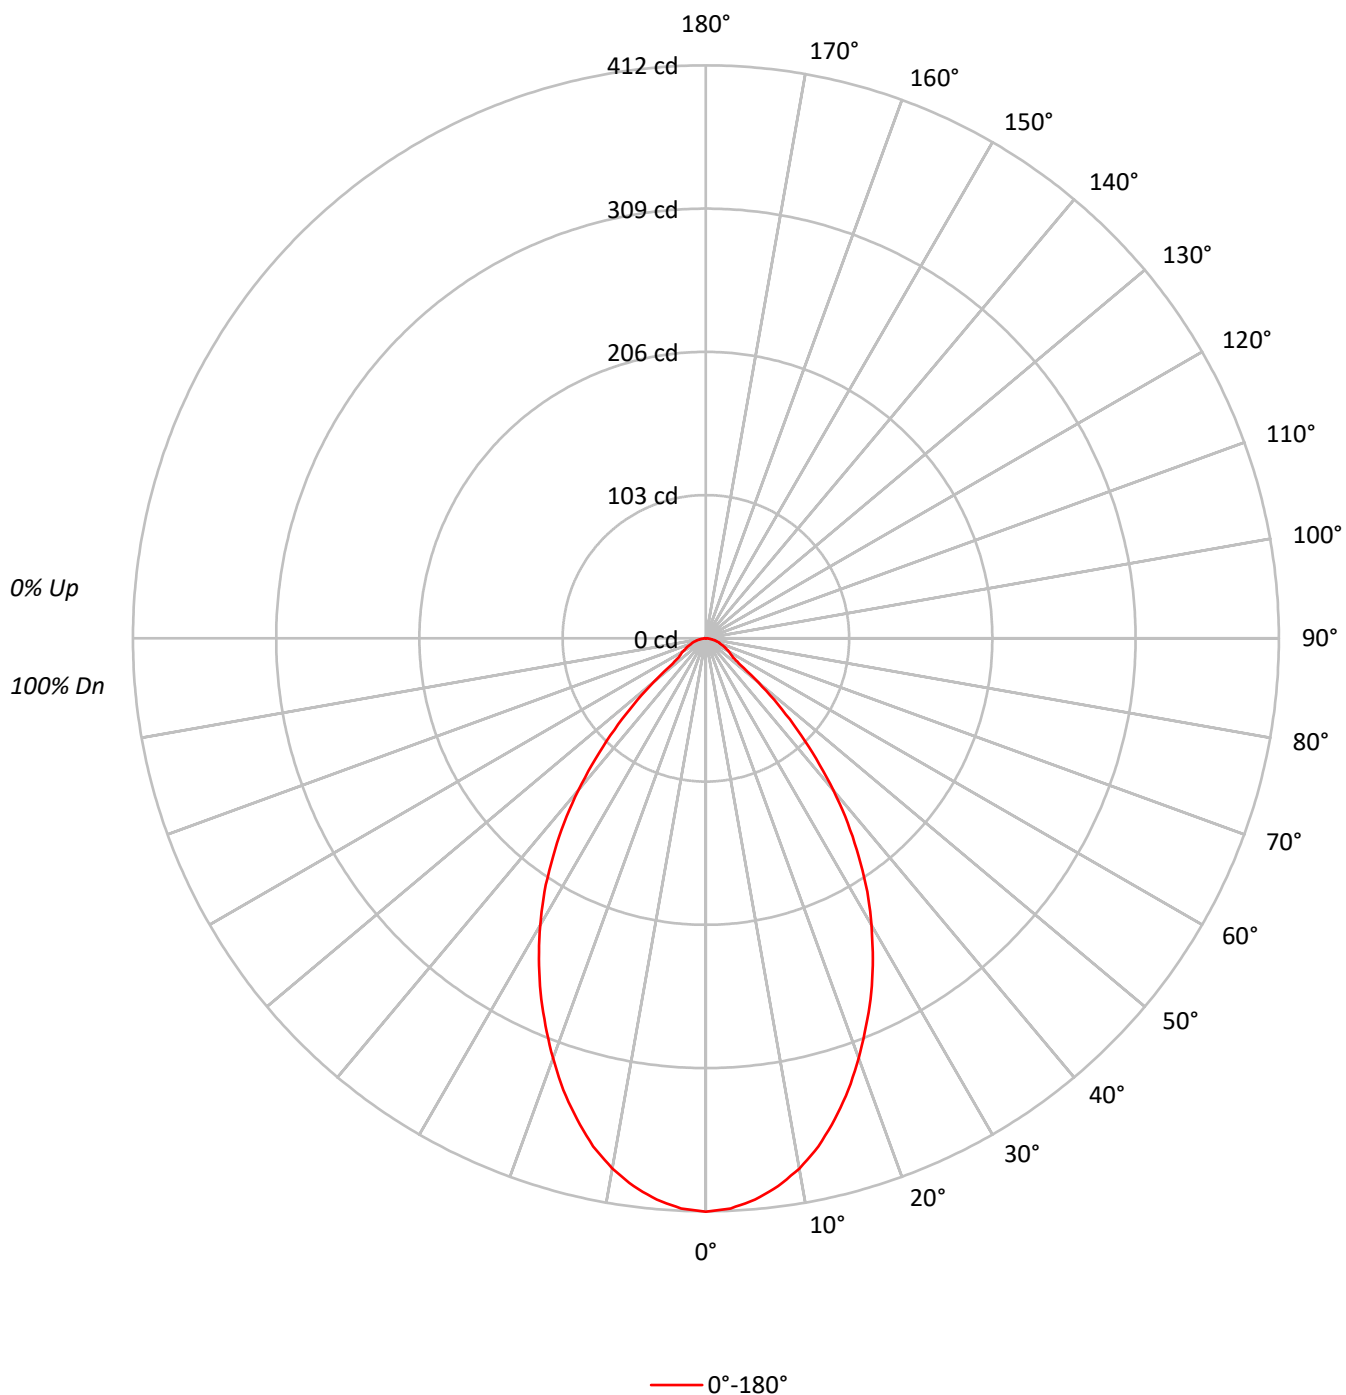

TEST NUMBER: P1246688

CATALOG NUMBER: P3AS09R659024DE010 E3DLD1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	112	109	106	103	110	107	104	101	102	100	98		99	97	95		95
2	105	99	94	90	103	97	93	89	94	90	87		91	88	85		88
3	99	91	85	80	96	89	84	79	87	82	78		84	80	77		82
4	92	83	77	72	90	82	76	71	80	75	70		78	73	70		76
5	87	77	70	65	85	76	69	65	74	68	64		72	67	63		71
6	82	71	64	59	80	70	64	59	69	63	58		67	62	58		66
7	77	66	59	54	75	65	59	54	64	58	54		63	57	53		61
8	72	61	55	50	71	61	54	50	60	54	49		59	53	49		58
9	68	57	51	46	67	57	50	46	56	50	46		55	49	46		54
10	65	54	47	43	64	53	47	43	52	47	43		52	46	42		51

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	90409
5°	89192
10°	86193
15°	81294
20°	74977
25°	68060
30°	60288
35°	51290
40°	40819
45°	28809
50°	16716
55°	9137
60°	8508
65°	7679
70°	7052
75°	6524
80°	5683
85°	4780

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 28809 cd/sqm

TEST NUMBER: P1246688

CATALOG NUMBER: P3AS09R659024DE010 E3DLD1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	38.1	7.5
10°-20°	100.2	19.7
20°-30°	128.7	25.3
30°-40°	119.1	23.4
40°-50°	71.9	14.2
50°-60°	24.5	4.8
60°-70°	14.8	2.9
70°-80°	8.3	1.6
80°-90°	2.4	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	267.0	52.6
0°-40°	386.1	76.0
0°-60°	482.5	95.0
0°-90°	508.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	508.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	412	
5°	405	38
15°	358	100
25°	281	129
35°	192	119
45°	93	72
55°	24	25
65°	15	15
75°	8	8
85°	2	2
90°	0	

TEST NUMBER: P1246688

CATALOG NUMBER: P3AS09R659024DE010 E3DLD1MW

CANDELA DISTRIBUTION (FULL):

0°	
0°	412.3
2.5°	410.3
5°	405.2
7.5°	397.4
10°	387.1
12.5°	374.2
15°	358.1
17.5°	340.6
20°	321.3
22.5°	301.3
25°	281.3
27.5°	260.0
30°	238.1
32.5°	216.1
35°	191.6
37.5°	167.7
40°	142.6
42.5°	117.4
45°	92.9
47.5°	70.3
50°	49.0
52.5°	31.0
55°	23.9
57.5°	21.3
60°	19.4
62.5°	16.8
65°	14.8
67.5°	12.9
70°	11.0
72.5°	9.7
75°	7.7
77.5°	6.5
80°	4.5
82.5°	3.2
85°	1.9
87.5°	1.3
90°	0.0

(END OF REPORT)