

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1246750

Luminaire Tested: P3AS10R129024DE010 E3DLP1MW

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1246750
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-1)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS10R129024DE010 E3DLP1MW
Description: 3in Adjustable LED luminaire with, R12 optic, 2400K CCT AND, 90CRI , E3DLP1MW TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 367.0 lumens
Efficiency: N/A
Efficacy: 31.4 lumens/watt
Spacing Criteria (0/90/45): 0.52 / 0.52 / 0.61
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 11.7
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1246750

CATALOG NUMBER: P3AS10R129024DE010 E3DLP1MW

Luminous Intensity Polar Plot

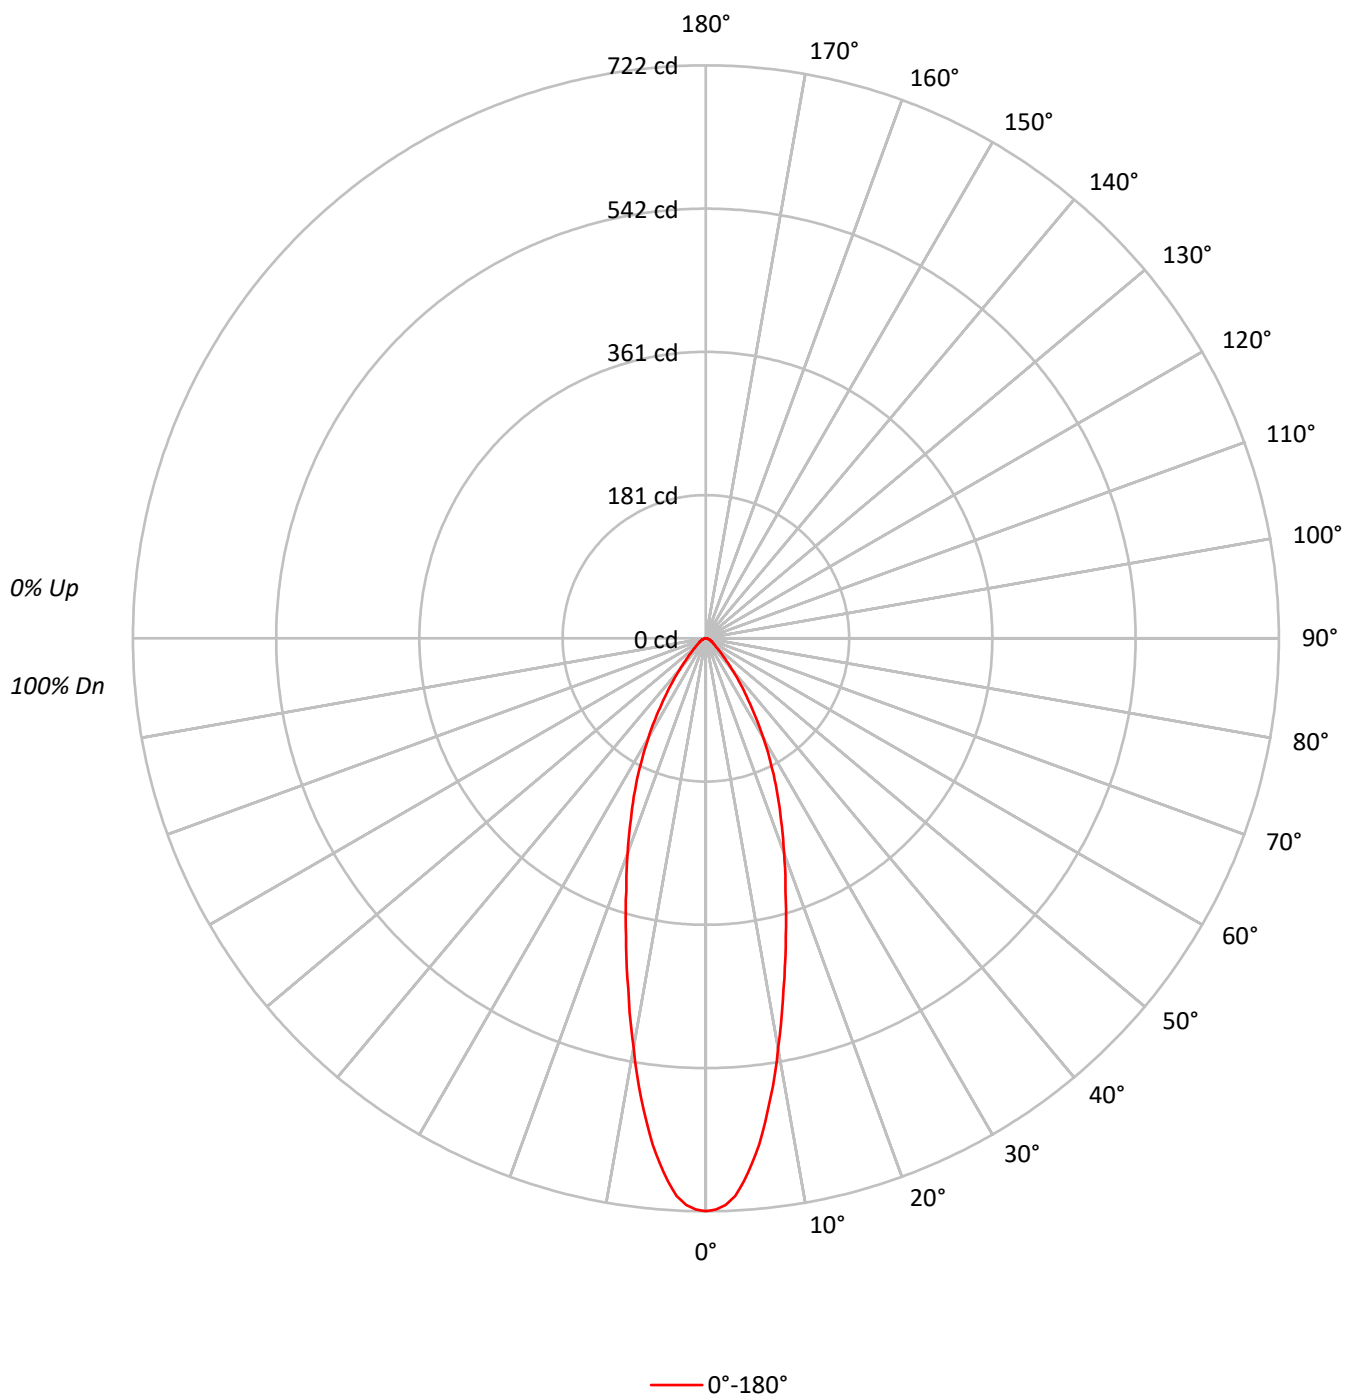

TEST NUMBER: P1246750

CATALOG NUMBER: P3AS10R129024DE010 E3DLP1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					0
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	113	110	108	106		111	108	106	104		104	102	101		100	99	98		97	96	95
2	108	103	98	95		105	101	97	94		98	95	92		95	92	90		92	90	88
3	102	96	91	87		100	94	90	86		92	88	85		89	86	83		87	84	82
4	97	90	84	80		95	88	83	79		86	82	78		84	81	78		82	79	77
5	93	84	78	74		91	83	78	74		81	77	73		80	76	72		78	75	72
6	88	79	73	69		87	79	73	69		77	72	69		76	71	68		74	71	68
7	84	75	69	65		83	74	69	65		73	68	64		72	67	64		71	67	64
8	80	71	65	61		79	71	65	61		69	64	61		68	64	61		67	63	60
9	77	68	62	58		76	67	62	58		66	61	58		65	61	57		64	60	57
10	74	64	59	55		73	64	59	55		63	58	55		62	58	55		62	57	54

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	158255
5°	146269
10°	116787
15°	88218
20°	67183
25°	51197
30°	36664
35°	23932
40°	14685
45°	8869
50°	5902
55°	4549
60°	3903
65°	3424
70°	3077
75°	3050
80°	2273
85°	1510

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 8869 cd/sqm

TEST NUMBER: P1246750

CATALOG NUMBER: P3AS10R129024DE010 E3DLP1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	58.9	16.0
10°-20°	108.6	29.6
20°-30°	96.7	26.3
30°-40°	57.2	15.6
40°-50°	23.5	6.4
50°-60°	11.0	3.0
60°-70°	6.7	1.8
70°-80°	3.6	1.0
80°-90°	0.9	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	264.2	72.0
0°-40°	321.4	87.6
0°-60°	355.9	97.0
0°-90°	367.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	367.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	722	
5°	664	59
15°	389	109
25°	212	97
35°	89	57
45°	29	23
55°	12	11
65°	7	7
75°	4	4
85°	1	1
90°	0	

TEST NUMBER: P1246750

CATALOG NUMBER: P3AS10R129024DE010 E3DLP1MW

CANDELA DISTRIBUTION (FULL):

0°	
0°	721.7
1°	719.9
2°	714.6
3°	703.8
4°	686.0
5°	664.5
6°	641.3
7°	613.8
8°	585.2
9°	556.0
10°	524.5
12.5°	452.3
15°	388.6
17.5°	333.7
20°	287.9
22.5°	247.3
25°	211.6
27.5°	177.0
30°	144.8
32.5°	115.6
35°	89.4
37.5°	68.5
40°	51.3
42.5°	38.1
45°	28.6
47.5°	22.1
50°	17.3
52.5°	14.3
55°	11.9
57.5°	10.1
60°	8.9
62.5°	7.7
65°	6.6
67.5°	6.0
70°	4.8
72.5°	4.2
75°	3.6
77.5°	2.4
80°	1.8
82.5°	1.2
85°	0.6
87.5°	0.6
90°	0.0

(END OF REPORT)