

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1246996

Luminaire Tested: P3AS13R509024DE010 E3CD1MMS

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1246996  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-32)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS13R509024DE010 E3CD1MMS  
Description: 3in Adjustable LED luminaire with, R50 optic, 2400K CCT AND, 90CRI , E3CD1MMS TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1173.0 lumens  
Efficiency: N/A  
Efficacy: 80.3 lumens/watt  
Spacing Criteria (0/90/45): 0.84 / 0.84 / 0.76  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 14.6  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1246996  
CATALOG NUMBER: P3AS13R509024DE010 E3CD1MMS

### Luminous Intensity Polar Plot

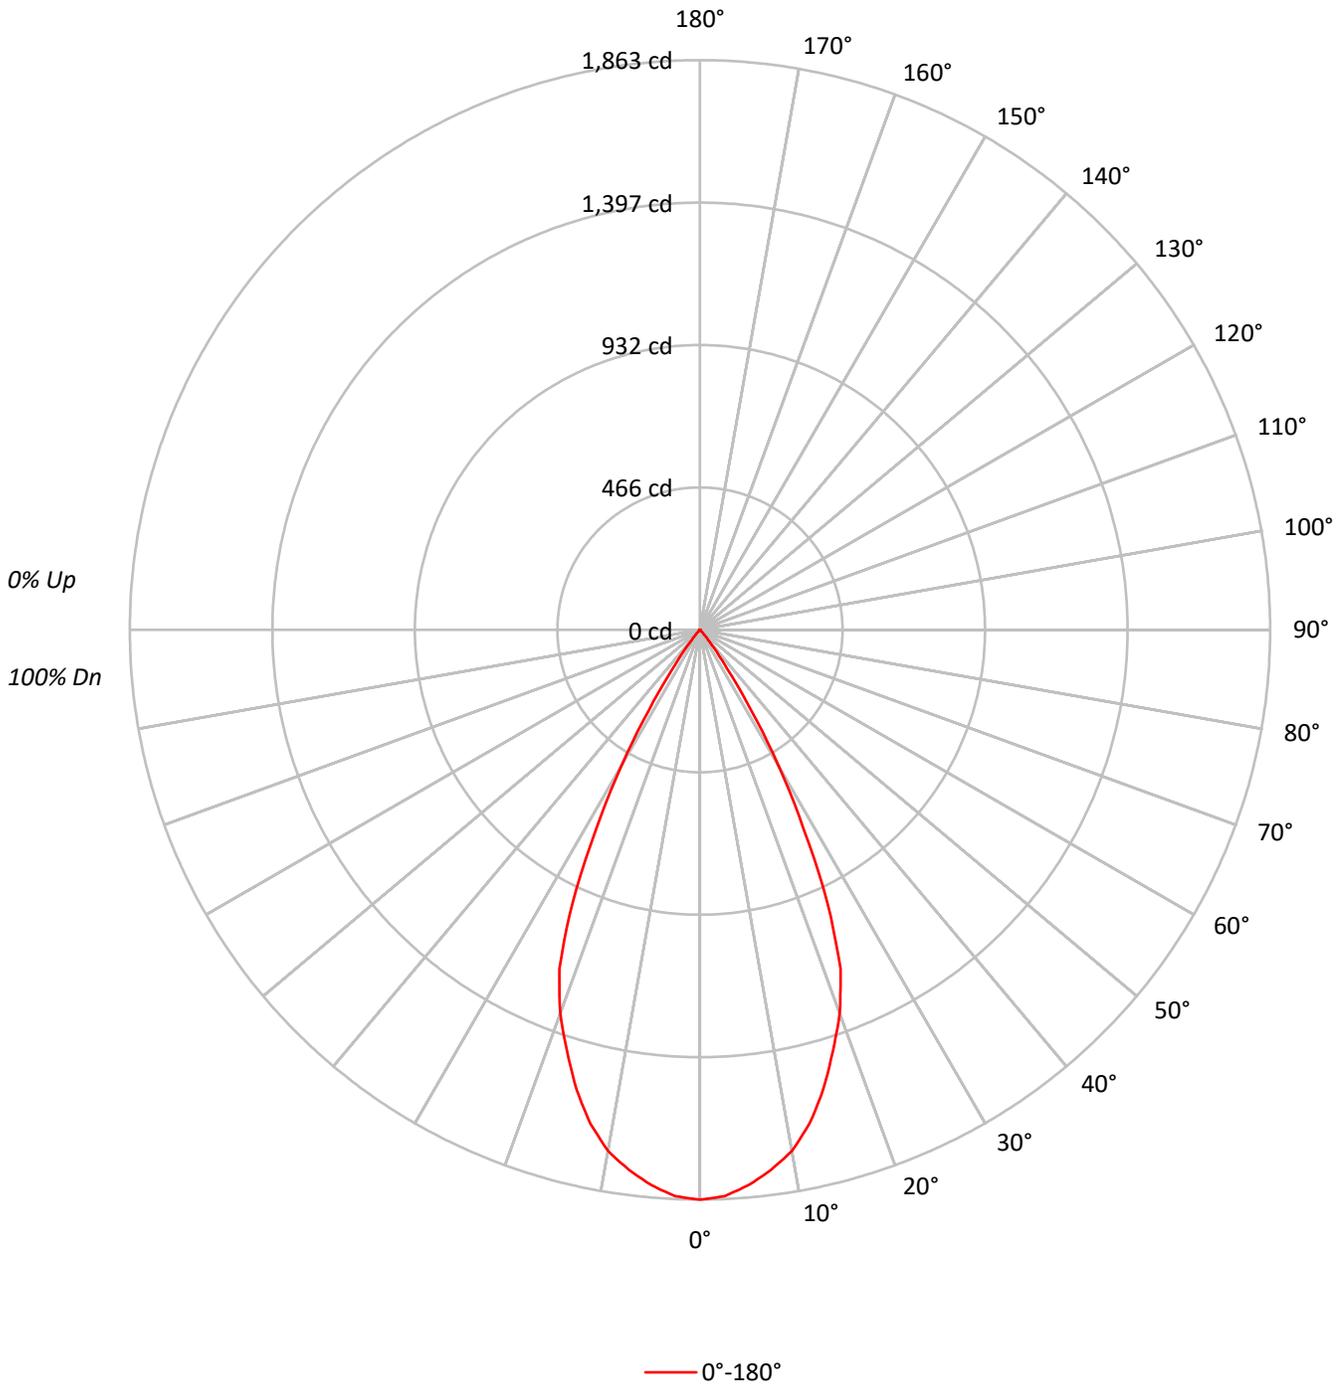



TEST NUMBER: P1246996  
 CATALOG NUMBER: P3AS13R509024DE010 E3CD1MMS

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	114	112	109	107	112	109	107	106	105	104	102	102	101	99	98	97	96	95			95
2	109	105	101	98	107	103	100	97	100	97	95	97	95	93	94	93	91	90			90
3	105	99	95	91	103	98	94	90	95	92	89	93	90	88	91	88	86	85			85
4	100	94	89	85	99	92	88	85	90	87	84	88	85	83	87	84	82	80			80
5	96	89	84	80	94	88	83	79	86	82	79	84	81	78	83	80	77	76			76
6	92	84	79	75	91	83	79	75	82	78	74	81	77	74	79	76	73	72			72
7	88	80	75	71	87	79	74	71	78	74	71	77	73	70	76	73	70	69			69
8	85	76	71	67	83	76	71	67	75	70	67	74	70	67	73	69	66	65			65
9	81	73	68	64	80	72	67	64	71	67	64	71	66	63	70	66	63	62			62
10	78	69	64	61	77	69	64	61	68	64	61	68	63	61	67	63	60	59			59

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	408520
5°	401210
10°	385230
15°	353260
20°	311504
25°	238756
30°	129817
35°	41760
40°	9818
45°	1333
50°	1160
55°	1300
60°	1140
65°	1349
70°	1090
75°	1440
80°	1137
85°	2264

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 85°  
 Luminance: 2264 cd/sqm



TEST NUMBER: P1246996  
 CATALOG NUMBER: P3AS13R509024DE010 E3CD1MMS

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	171.0	14.6
10°-20°	432.6	36.9
20°-30°	433.2	36.9
30°-40°	121.8	10.4
40°-50°	7.4	0.6
50°-60°	2.8	0.2
60°-70°	2.2	0.2
70°-80°	1.5	0.1
80°-90°	0.6	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1036.8	88.4
0°-40°	1158.6	98.8
0°-60°	1168.7	99.6
0°-90°	1173.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1173.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1863	
5°	1823	171
15°	1556	433
25°	987	433
35°	156	122
45°	4	7
55°	3	3
65°	3	2
75°	2	1
85°	1	1
90°	0	



TEST NUMBER: P1246996  
CATALOG NUMBER: P3AS13R509024DE010 E3CD1MMS

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1863.0
2.5°	1853.6
5°	1822.7
7.5°	1780.7
10°	1730.1
12.5°	1653.8
15°	1556.1
17.5°	1443.8
20°	1334.9
22.5°	1199.4
25°	986.8
27.5°	734.7
30°	512.7
32.5°	309.5
35°	156.0
37.5°	73.7
40°	34.3
42.5°	12.9
45°	4.3
47.5°	3.4
50°	3.4
52.5°	3.4
55°	3.4
57.5°	2.6
60°	2.6
62.5°	2.6
65°	2.6
67.5°	1.7
70°	1.7
72.5°	1.7
75°	1.7
77.5°	0.9
80°	0.9
82.5°	0.9
85°	0.9
87.5°	0.0
90°	0.0

(END OF REPORT)