

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1247158

Luminaire Tested: P3AS17R129024DE010 E3DLD1WMH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1247158
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-2)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R129024DE010 E3DLD1WMH
Description: 3in Adjustable LED luminaire with, R12 optic, 2400K CCT AND, 90CRI , E3DLD1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 733.0 lumens
Efficiency: N/A
Efficacy: 32.0 lumens/watt
Spacing Criteria (0/90/45): 0.76 / 0.76 / 0.82
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 22.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1247158

CATALOG NUMBER: P3AS17R129024DE010 E3DLD1WMH

Luminous Intensity Polar Plot

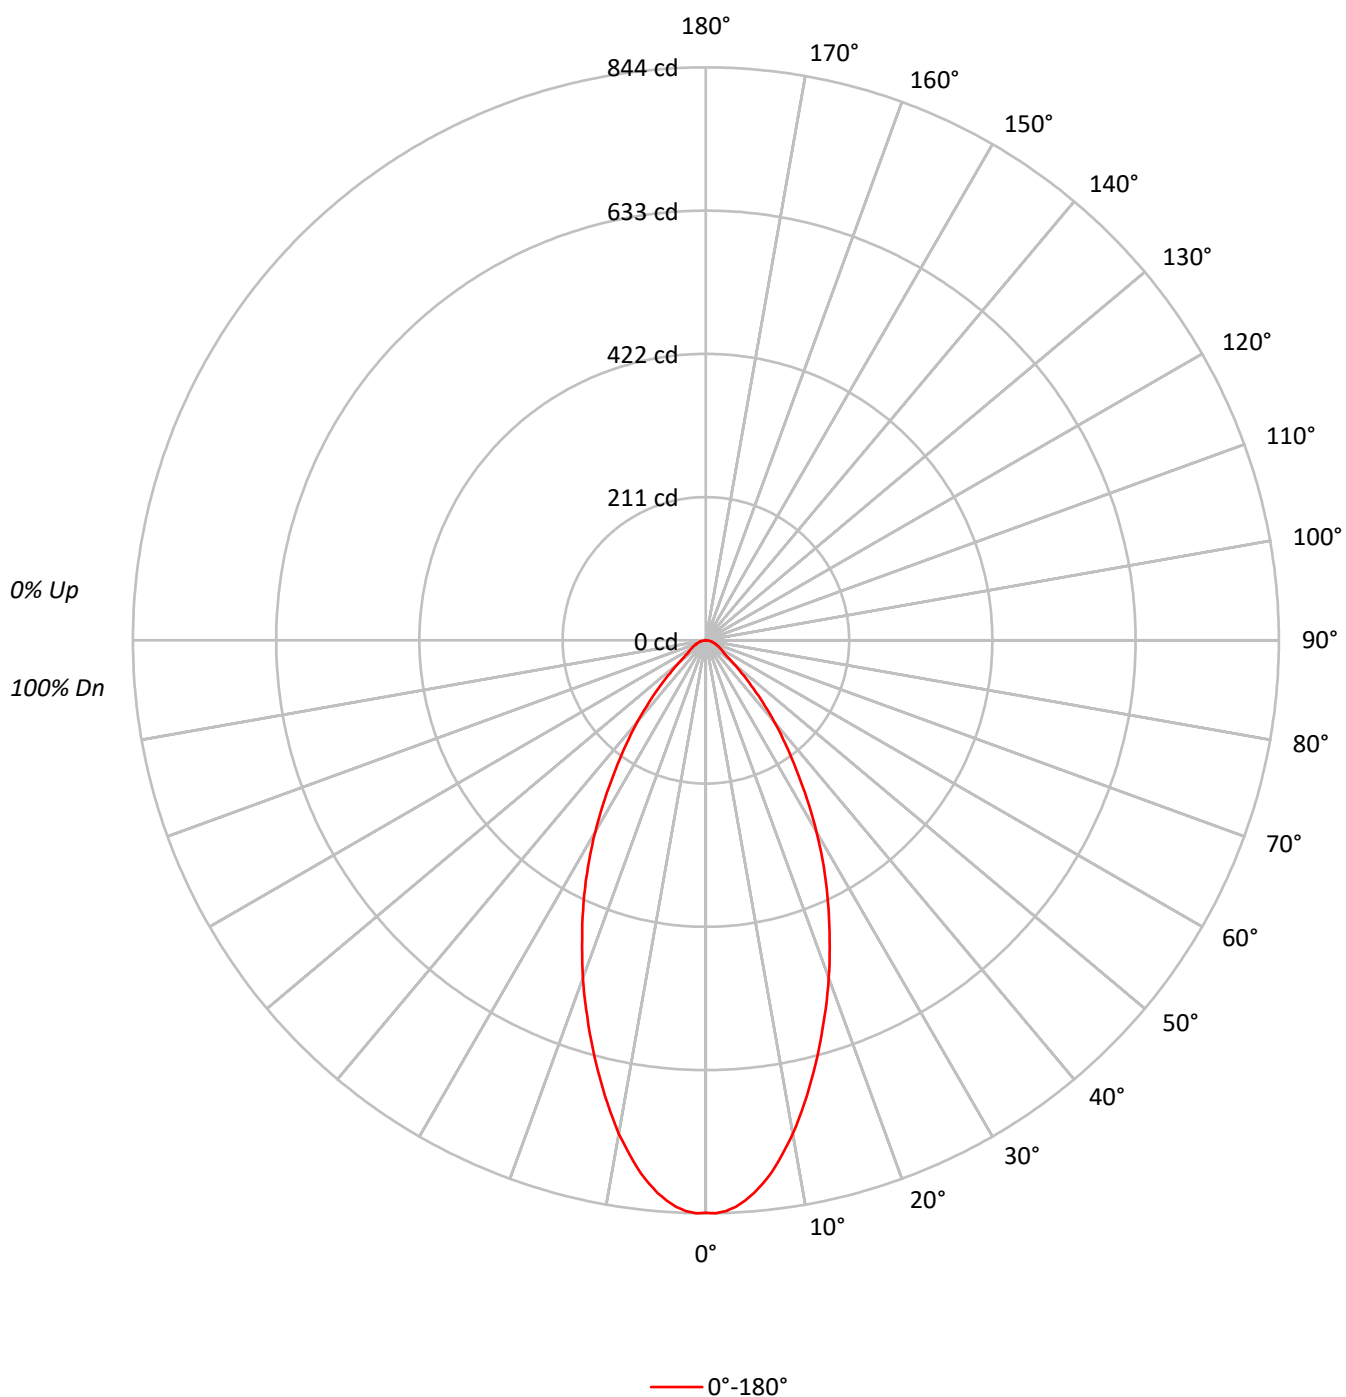

TEST NUMBER: P1247158

CATALOG NUMBER: P3AS17R129024DE010 E3DLD1WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	109	106	104	110	107	105	102	103	101	99		99	98	96		96
2	106	100	96	92	104	99	95	91	95	92	89		92	90	87		90
3	100	93	87	83	98	91	86	82	89	84	81		86	82	79		84
4	94	86	80	75	92	85	79	74	82	77	73		80	76	73		78
5	89	80	73	68	87	79	73	68	77	72	67		75	70	67		74
6	84	74	68	63	83	73	67	63	72	66	62		70	66	62		69
7	80	69	63	58	78	69	63	58	67	62	58		66	61	57		65
8	76	65	59	54	74	65	58	54	63	58	54		62	57	54		61
9	72	61	55	51	71	61	55	51	60	54	50		59	54	50		58
10	68	58	52	48	67	57	51	47	57	51	47		56	51	47		55

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	184897
5°	179881
10°	164370
15°	143974
20°	123514
25°	103119
30°	82519
35°	61890
40°	44913
45°	29367
50°	18387
55°	12425
60°	11008
65°	10118
70°	9553
75°	8642
80°	8208
85°	7045

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 29367 cd/sqm

TEST NUMBER: P1247158

CATALOG NUMBER: P3AS17R129024DE010 E3DLD1WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	75.4	10.3
10°-20°	176.7	24.1
20°-30°	194.7	26.6
30°-40°	145.8	19.9
40°-50°	75.6	10.3
50°-60°	31.3	4.3
60°-70°	19.4	2.6
70°-80°	10.9	1.5
80°-90°	3.1	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	446.8	61.0
0°-40°	592.6	80.8
0°-60°	699.5	95.4
0°-90°	733.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	733.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	843	
5°	817	75
15°	634	177
25°	426	195
35°	231	146
45°	95	76
55°	32	31
65°	20	19
75°	10	11
85°	3	3
90°	0	

TEST NUMBER: P1247158

CATALOG NUMBER: P3AS17R129024DE010 E3DLD1WMH

CANDELA DISTRIBUTION (FULL):

0°	
0°	843.2
1°	844.1
2°	841.3
3°	835.7
4°	827.4
5°	817.2
6°	804.2
7°	790.2
8°	773.5
9°	755.9
10°	738.2
12.5°	687.2
15°	634.2
17.5°	581.3
20°	529.3
22.5°	476.4
25°	426.2
27.5°	376.1
30°	325.9
32.5°	276.7
35°	231.2
37.5°	192.2
40°	156.9
42.5°	124.4
45°	94.7
47.5°	71.5
50°	53.9
52.5°	39.9
55°	32.5
57.5°	28.8
60°	25.1
62.5°	22.3
65°	19.5
67.5°	16.7
70°	14.9
72.5°	12.1
75°	10.2
77.5°	8.4
80°	6.5
82.5°	4.6
85°	2.8
87.5°	0.9
90°	0.0

(END OF REPORT)