

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1247267

Luminaire Tested: P3AS17R309024DE010 E3DL1GPH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1247267
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-15)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R309024DE010 E3DL1GPH
Description: 3in Adjustable LED luminaire with, R30 optic, 2400K CCT AND, 90CRI , E3DL1GPH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 589.1 lumens
Efficiency: N/A
Efficacy: 27.8 lumens/watt
Spacing Criteria (0/90/45): 0.54 / 0.54 / 0.54
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 21.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1247267

CATALOG NUMBER: P3AS17R309024DE010 E3DL1GPH

Luminous Intensity Polar Plot

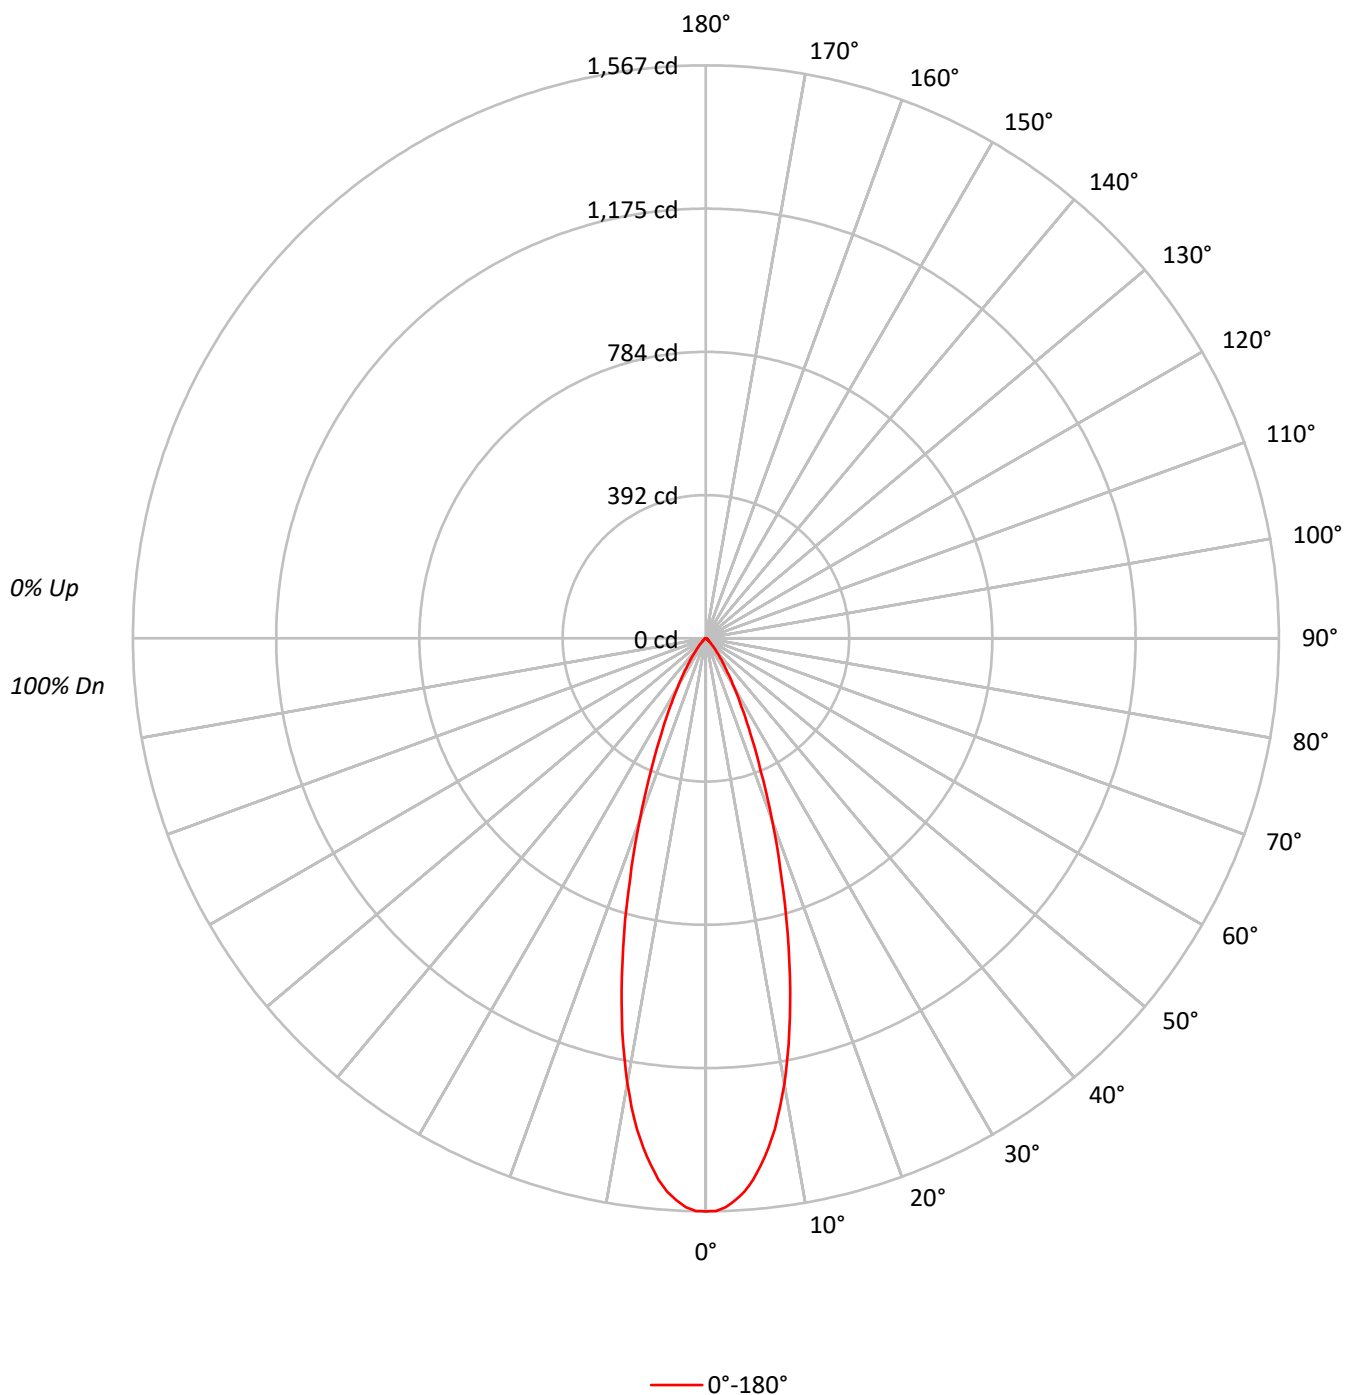

TEST NUMBER: P1247267

CATALOG NUMBER: P3AS17R309024DE010 E3DL1GPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	112	110	108	112	110	108	106	106	104	103		102	101	100		99
2	110	105	102	99	107	104	101	98	101	98	96		98	96	94		95
3	105	100	96	92	103	98	95	91	96	93	90		94	91	89		91
4	101	95	90	87	99	94	89	86	92	88	85		90	87	84		88
5	97	90	85	82	96	89	85	81	88	84	81		86	83	80		85
6	94	86	81	78	92	85	81	77	84	80	77		83	79	76		81
7	90	82	77	74	89	82	77	74	81	76	73		80	76	73		78
8	87	79	74	71	86	79	74	71	78	73	70		77	73	70		76
9	84	76	71	68	83	75	71	68	75	70	67		74	70	67		73
10	81	73	68	65	80	73	68	65	72	68	65		71	67	65		71

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	343701
5°	327140
10°	275167
15°	198435
20°	123094
25°	69996
30°	38892
35°	21148
40°	11135
45°	6047
50°	3241
55°	2141
60°	1974
65°	2024
70°	1795
75°	1440
80°	1389
85°	1510

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 6047 cd/sqm

TEST NUMBER: P1247267

CATALOG NUMBER: P3AS17R309024DE010 E3DL1GPH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	133.8	22.7
10°-20°	237.9	40.4
20°-30°	137.5	23.3
30°-40°	52.2	8.9
40°-50°	16.0	2.7
50°-60°	5.4	0.9
60°-70°	3.7	0.6
70°-80°	2.0	0.3
80°-90°	0.6	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	509.2	86.4
0°-40°	561.4	95.3
0°-60°	582.8	98.9
0°-90°	589.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	589.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1567	
5°	1486	134
15°	874	238
25°	289	137
35°	79	52
45°	20	16
55°	6	5
65°	4	4
75°	2	2
85°	1	1
90°	0	

TEST NUMBER: P1247267

CATALOG NUMBER: P3AS17R309024DE010 E3DL1GPH

CANDELA DISTRIBUTION (FULL):

0°	
0°	1567.4
1°	1566.3
2°	1556.8
3°	1539.0
4°	1516.8
5°	1486.2
6°	1447.2
7°	1403.8
8°	1355.4
9°	1297.5
10°	1235.8
11°	1169.0
12°	1098.3
13°	1024.3
14°	949.2
15°	874.1
17.5°	689.4
20°	527.5
22.5°	391.2
25°	289.3
27.5°	210.3
30°	153.6
32.5°	110.7
35°	79.0
37.5°	55.1
40°	38.9
42.5°	27.3
45°	19.5
47.5°	13.4
50°	9.5
52.5°	6.7
55°	5.6
57.5°	5.0
60°	4.5
62.5°	3.9
65°	3.9
67.5°	3.3
70°	2.8
72.5°	2.2
75°	1.7
77.5°	1.7
80°	1.1
82.5°	1.1
85°	0.6
87.5°	0.0



TEST NUMBER: P1247267

CATALOG NUMBER: P3AS17R309024DE010 E3DL1GPH

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)