

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1247570

Luminaire Tested: P3AS20R259024D010 E3CB1MMS

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1247570
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-12)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS20R259024D010 E3CB1MMS
Description: 3in Adjustable LED luminaire with, R25 optic, 2400K CCT AND, 90CRI , E3CB1MMS TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1898.1 lumens
Efficiency: N/A
Efficacy: 65.9 lumens/watt
Spacing Criteria (0/90/45): 0.45 / 0.45 / 0.41
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 28.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1247570

CATALOG NUMBER: P3AS20R259024D010 E3CB1MMS

Luminous Intensity Polar Plot

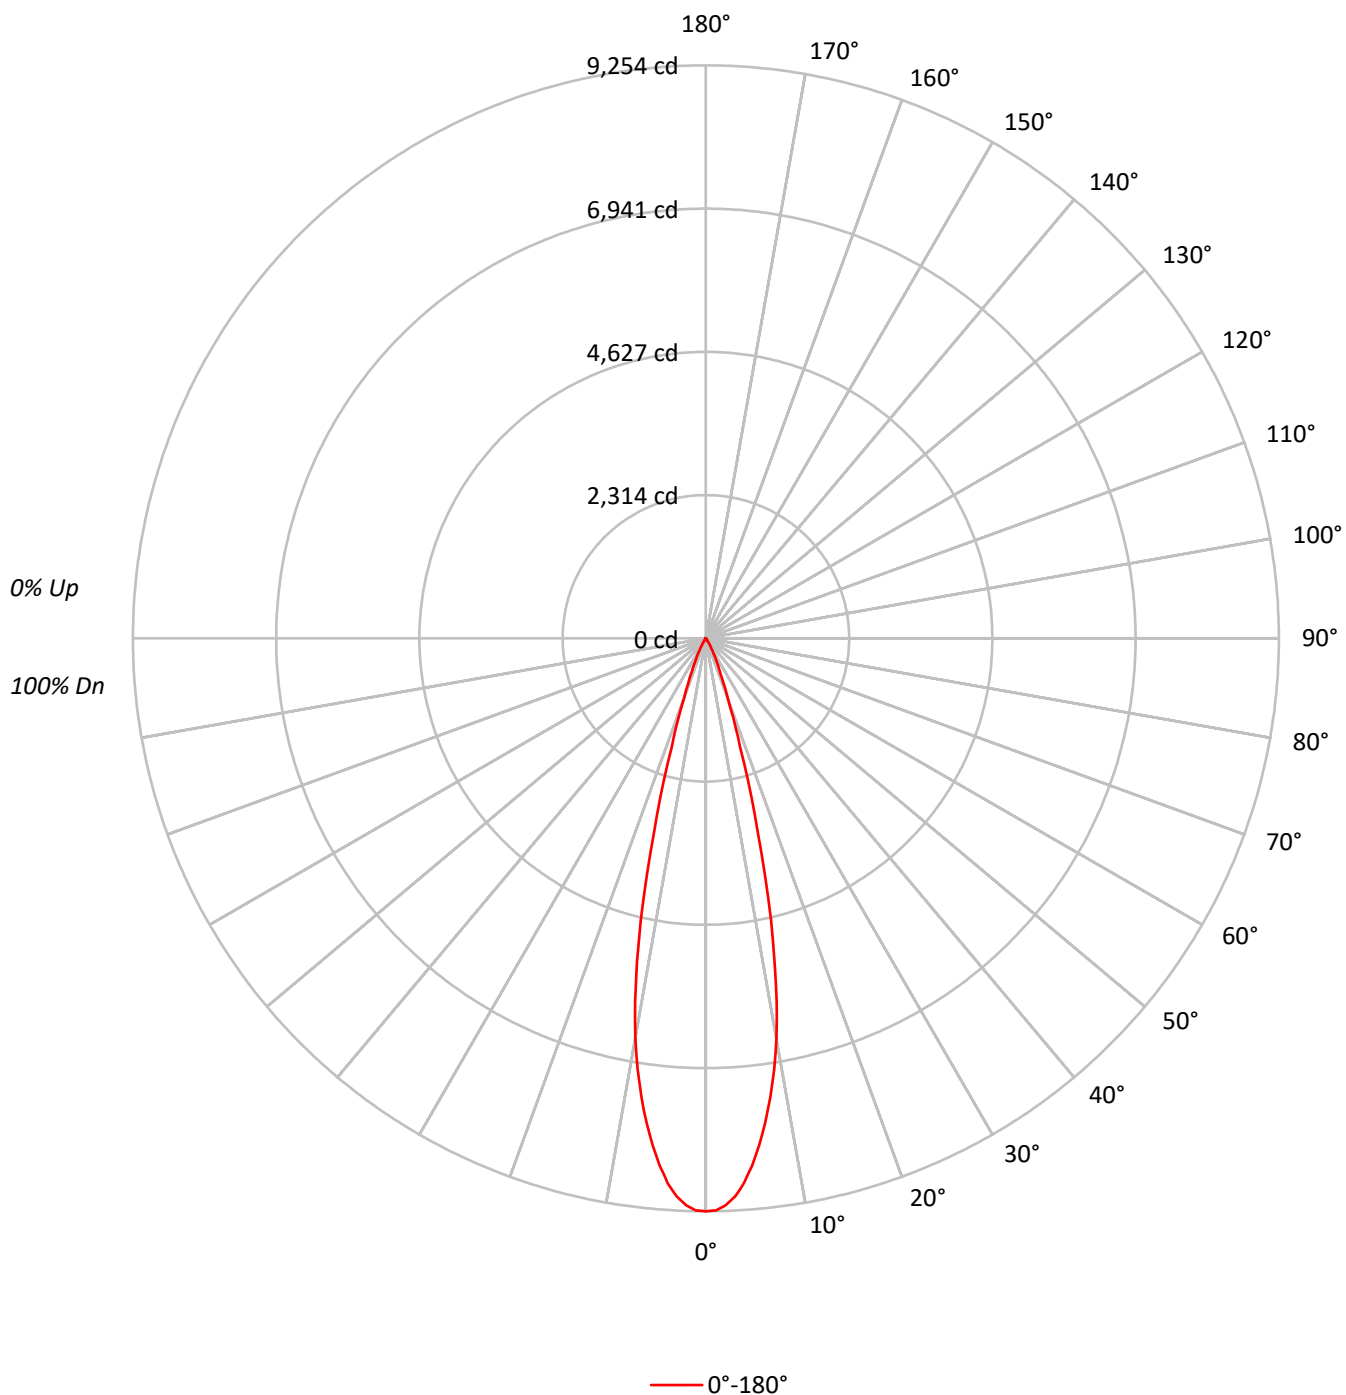

TEST NUMBER: P1247570

CATALOG NUMBER: P3AS20R259024D010 E3CB1MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	99	99
1	115	113	111	110	113	111	109	108	107	106	105	103	103	102	100	99	99	97	96	96
2	112	108	105	103	110	107	104	102	104	102	100	101	99	98	98	97	96	94	93	93
3	108	104	101	98	107	103	100	97	100	98	96	98	96	94	96	94	93	92	91	91
4	105	100	97	94	104	99	96	93	97	95	92	96	93	91	94	92	90	89	88	88
5	103	97	93	90	101	96	93	90	95	92	89	93	91	89	92	90	88	87	86	86
6	100	94	90	87	99	93	90	87	92	89	87	91	88	86	90	87	86	85	84	84
7	97	91	88	85	96	91	87	85	90	87	84	89	86	84	88	85	83	83	82	82
8	95	89	85	83	94	89	85	82	88	84	82	87	84	82	86	83	81	81	80	80
9	93	87	83	80	92	86	83	80	86	82	80	85	82	80	84	82	80	79	78	78
10	91	85	81	78	90	84	81	78	84	80	78	83	80	78	82	80	78	77	76	76

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	2029245
5°	1882055
10°	1459581
15°	731877
20°	240448
25°	95618
30°	35879
35°	10386
40°	4695
45°	1861
50°	1535
55°	1147
60°	1316
65°	1557
70°	962
75°	1271
80°	1894
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 80°
Luminance: 1894 cd/sqm

TEST NUMBER: P1247570

CATALOG NUMBER: P3AS20R259024D010 E3CB1MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	752.1	39.6
10°-20°	897.2	47.3
20°-30°	202.3	10.7
30°-40°	32.8	1.7
40°-50°	5.9	0.3
50°-60°	3.2	0.2
60°-70°	2.8	0.1
70°-80°	1.6	0.1
80°-90°	0.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1851.6	97.6
0°-40°	1884.4	99.3
0°-60°	1893.5	99.8
0°-90°	1898.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1898.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	9254	
5°	8550	752
15°	3224	897
25°	395	202
35°	39	33
45°	6	6
55°	3	3
65°	3	3
75°	2	2
85°	0	0
90°	0	

TEST NUMBER: P1247570

CATALOG NUMBER: P3AS20R259024D010 E3CB1MMS

CANDELA DISTRIBUTION (FULL):

0°	
0°	9254.1
1°	9239.2
2°	9164.6
3°	9027.4
4°	8820.1
5°	8550.2
6°	8228.2
7°	7879.2
8°	7479.6
9°	7042.7
10°	6555.1
11°	5992.9
12°	5345.8
13°	4668.8
14°	3942.6
15°	3223.9
17.5°	1837.1
20°	1030.4
22.5°	621.8
25°	395.2
27.5°	243.1
30°	141.7
32.5°	74.6
35°	38.8
37.5°	25.3
40°	16.4
42.5°	10.4
45°	6.0
47.5°	4.5
50°	4.5
52.5°	4.5
55°	3.0
57.5°	3.0
60°	3.0
62.5°	3.0
65°	3.0
67.5°	3.0
70°	1.5
72.5°	1.5
75°	1.5
77.5°	1.5
80°	1.5
82.5°	0.0
85°	0.0
87.5°	0.0



TEST NUMBER: P1247570

CATALOG NUMBER: P3AS20R259024D010 E3CB1MMS

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)