

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1247632

Luminaire Tested: P3AS20R309024D010 E3PHLP1MW

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1247632
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2509-551-8)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS20R309024D010 E3PHLP1MW
Description: 3in Adjustable LED luminaire with, R30 optic, 2400K CCT AND, 90CRI , E3PHLP1MW TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 838.1 lumens
Efficiency: N/A
Efficacy: 29.1 lumens/watt
Spacing Criteria (0/90/45): 0.6 / 0.6 / 0.67
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 28.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1247632

CATALOG NUMBER: P3AS20R309024D010 E3PHLP1MW

Luminous Intensity Polar Plot

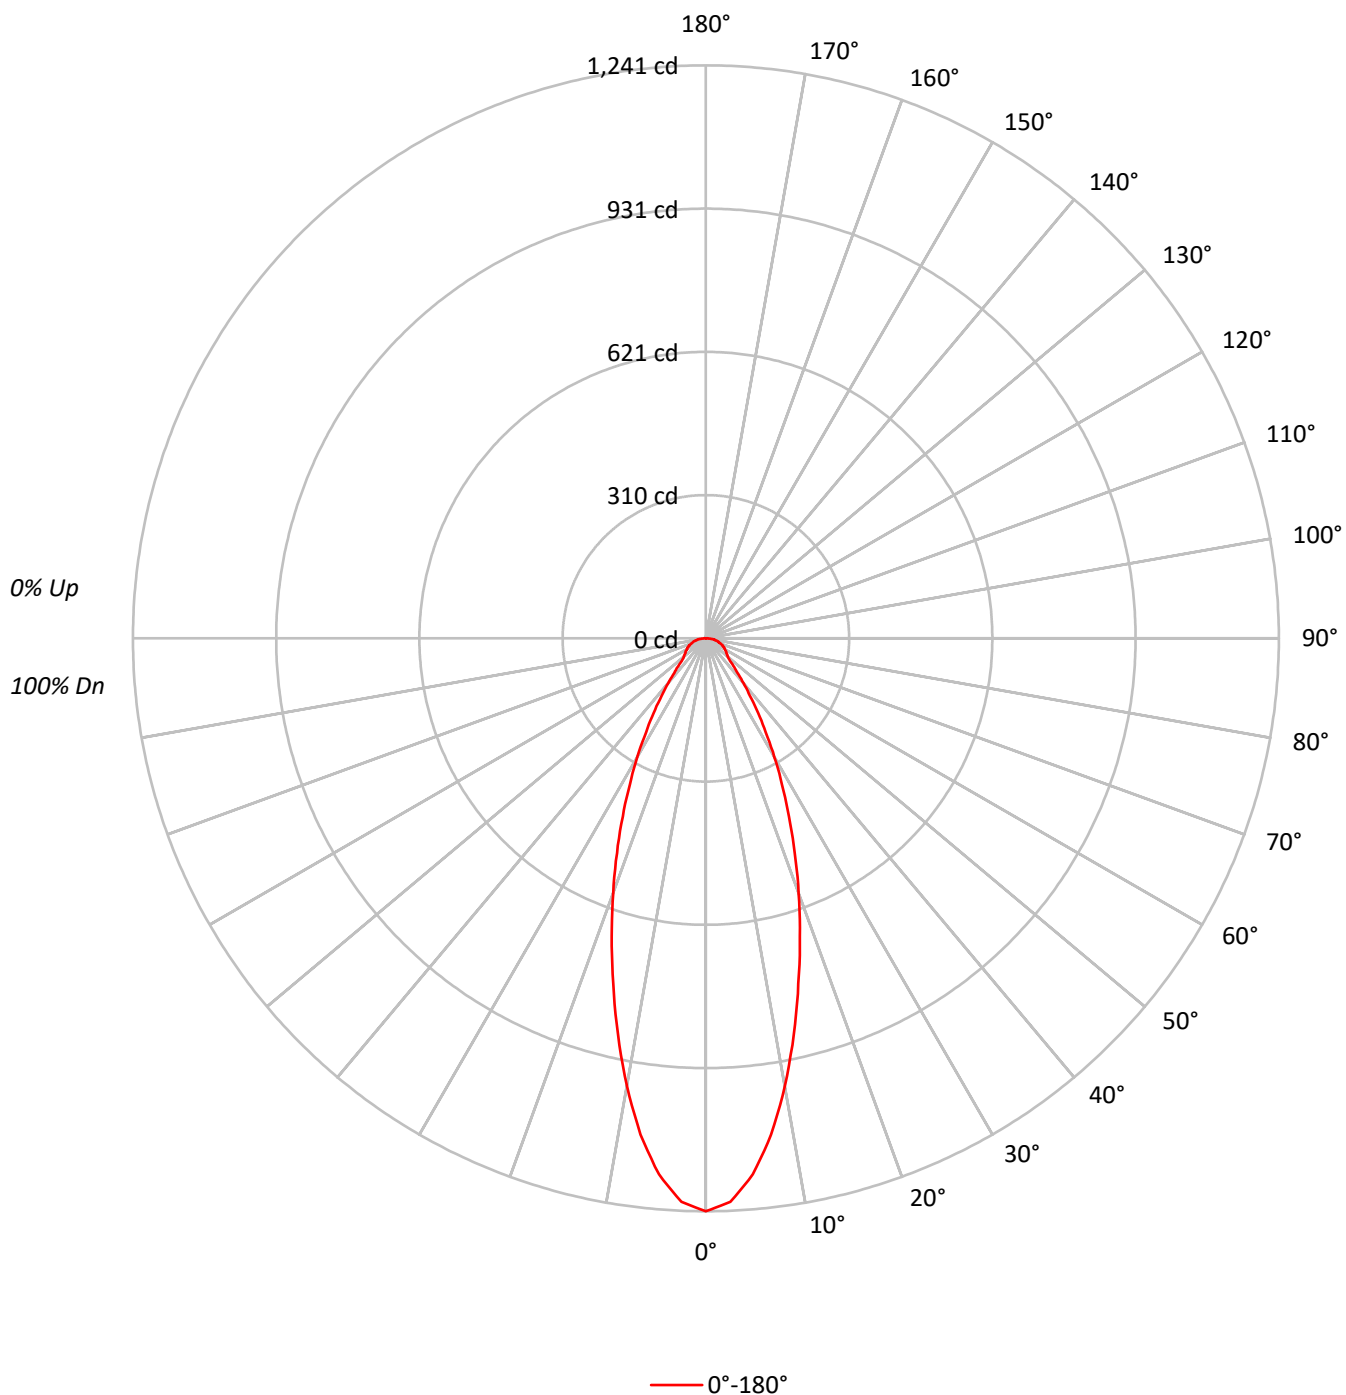

TEST NUMBER: P1247632

CATALOG NUMBER: P3AS20R309024D010 E3PHLP1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	112	108	105	102	109	106	103	101	102	100	97		98	96	94		95
2	105	99	94	90	103	97	93	89	94	90	87		91	88	85		88
3	99	91	85	80	96	89	84	80	87	82	78		84	80	77		82
4	93	84	78	73	91	83	77	72	81	76	71		79	74	71		77
5	88	78	72	67	86	77	71	66	75	70	66		74	69	65		72
6	83	73	67	62	82	72	66	62	71	65	61		69	64	61		68
7	79	69	62	57	78	68	62	57	67	61	57		66	60	57		64
8	75	65	58	54	74	64	58	54	63	57	53		62	57	53		61
9	72	61	55	51	71	61	55	51	60	54	50		59	54	50		58
10	68	58	52	48	67	58	52	48	57	51	48		56	51	47		55

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	272083
5°	256548
10°	219301
15°	175756
20°	137002
25°	103022
30°	75151
35°	52950
40°	36325
45°	26018
50°	21287
55°	20568
60°	20744
65°	21221
70°	22055
75°	23723
80°	24498
85°	27172

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 82.5°

Luminance: 28896 cd/sqm

TEST NUMBER: P1247632

CATALOG NUMBER: P3AS20R309024D010 E3PHLP1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	105.5	12.6
10°-20°	215.1	25.7
20°-30°	196.0	23.4
30°-40°	124.7	14.9
40°-50°	66.8	8.0
50°-60°	48.9	5.8
60°-70°	41.0	4.9
70°-80°	28.7	3.4
80°-90°	11.4	1.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	516.6	61.6
0°-40°	641.3	76.5
0°-60°	757.0	90.3
0°-90°	838.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	838.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1241	
5°	1166	105
15°	774	215
25°	426	196
35°	198	125
45°	84	67
55°	54	49
65°	41	41
75°	28	29
85°	11	11
90°	0	

TEST NUMBER: P1247632

CATALOG NUMBER: P3AS20R309024D010 E3PHLP1MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	1240.8
2.5°	1221.4
5°	1165.5
7.5°	1083.8
10°	984.9
12.5°	879.5
15°	774.2
17.5°	677.4
20°	587.1
22.5°	503.2
25°	425.8
27.5°	357.0
30°	296.8
32.5°	240.8
35°	197.8
37.5°	157.0
40°	126.9
42.5°	101.1
45°	83.9
47.5°	68.8
50°	62.4
52.5°	58.1
55°	53.8
57.5°	51.6
60°	47.3
62.5°	45.2
65°	40.9
67.5°	38.7
70°	34.4
72.5°	30.1
75°	28.0
77.5°	23.7
80°	19.4
82.5°	17.2
85°	10.8
87.5°	4.3
90°	0.0

(END OF REPORT)