

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1248069

Luminaire Tested: P3AS02R309027DE010 E3DLD1GPH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1248069
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-14)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS02R309027DE010 E3DLD1GPH
Description: 3in Adjustable LED luminaire with, R30 optic, 2700K CCT AND, 90CRI , E3DLD1GPH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 91.0 lumens
Efficiency: N/A
Efficacy: 25.3 lumens/watt
Spacing Criteria (0/90/45): 0.78 / 0.78 / 0.85
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 3.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1248069

CATALOG NUMBER: P3AS02R309027DE010 E3DLD1GPH

Luminous Intensity Polar Plot

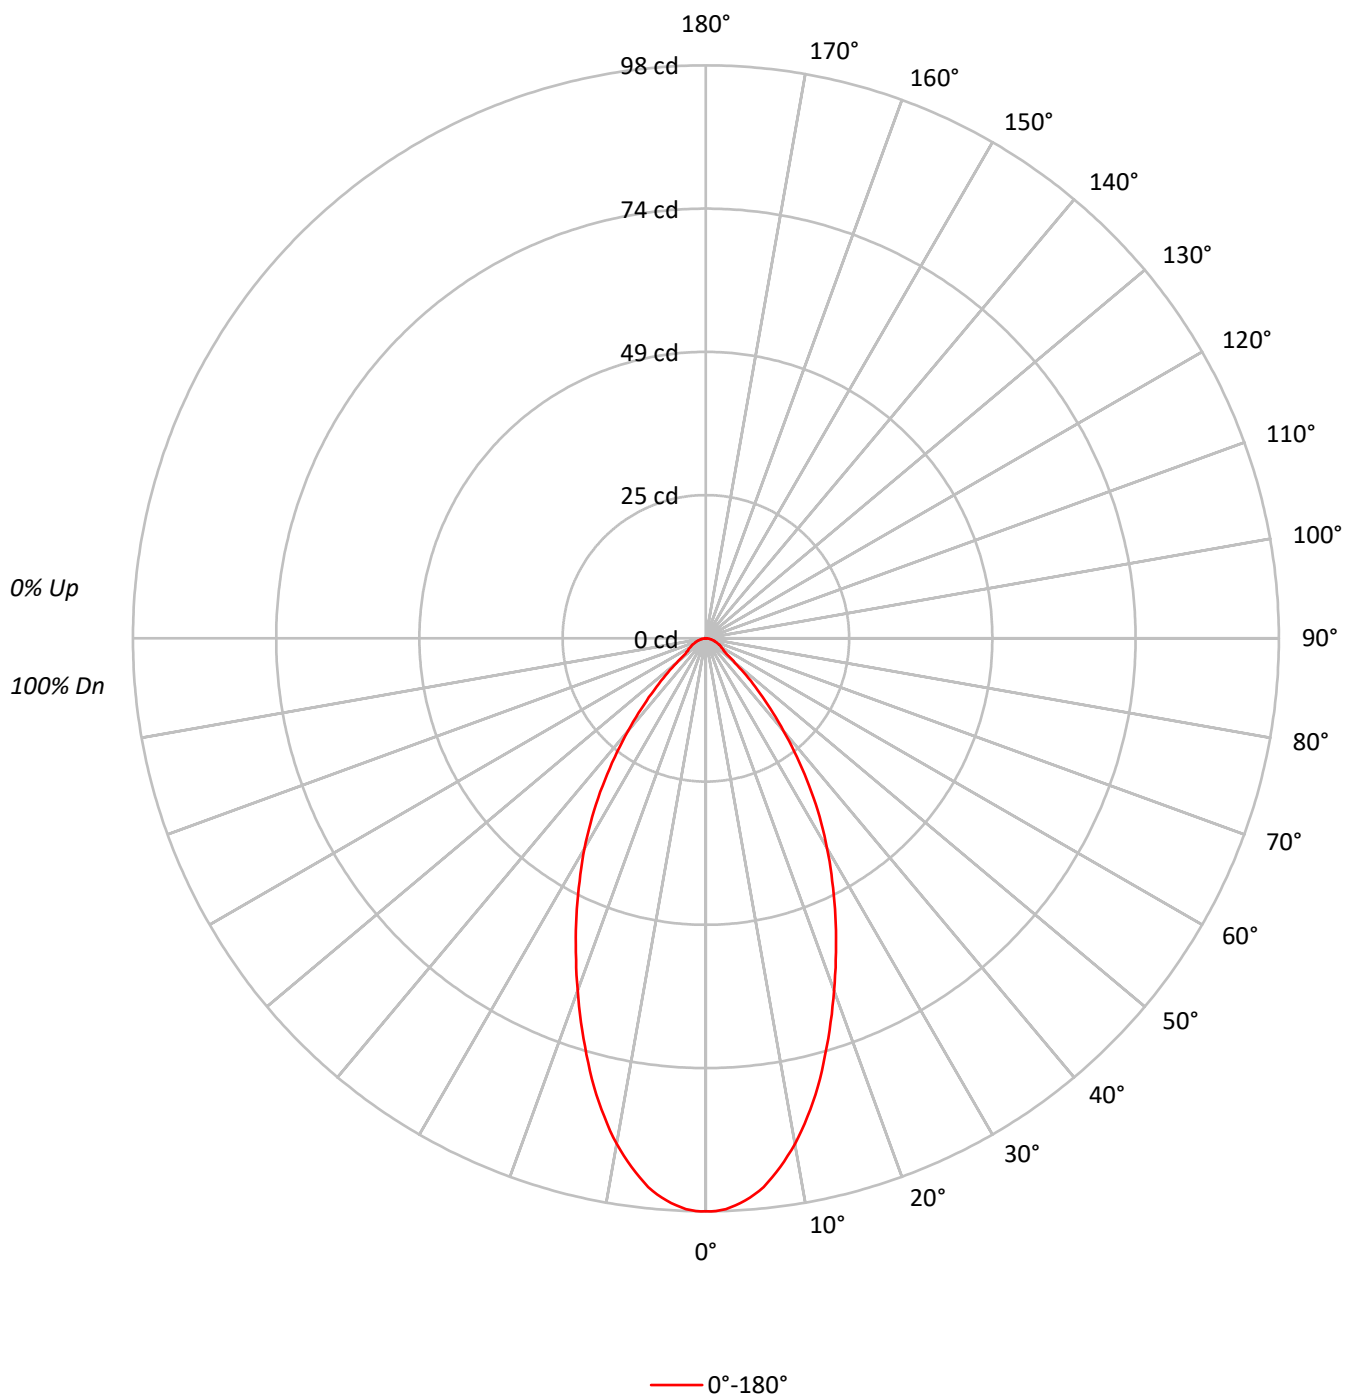

TEST NUMBER: P1248069

CATALOG NUMBER: P3AS02R309027DE010 E3DLD1GPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	112	109	106	104	110	107	105	102	103	101	99		99	98	96		96
2	106	100	96	92	104	99	94	91	95	92	89		92	89	87		89
3	100	92	87	82	98	91	86	82	88	84	80		86	82	79		83
4	94	85	79	74	92	84	78	74	82	77	73		80	76	72		78
5	89	79	73	68	87	78	72	68	76	71	67		75	70	66		73
6	84	74	67	62	82	73	67	62	71	66	62		70	65	61		69
7	79	69	62	58	78	68	62	58	67	61	57		66	61	57		65
8	75	65	58	54	74	64	58	53	63	57	53		62	57	53		61
9	71	61	54	50	70	60	54	50	59	54	50		58	53	49		57
10	68	57	51	47	67	57	51	47	56	50	47		55	50	46		54

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	21490
5°	21021
10°	19550
15°	17389
20°	14958
25°	12678
30°	10508
35°	8245
40°	5925
45°	3876
50°	2217
55°	1453
60°	1360
65°	1297
70°	1154
75°	1017
80°	1010
85°	755

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 3876 cd/sqm

TEST NUMBER: P1248069

CATALOG NUMBER: P3AS02R309027DE010 E3DLD1GPH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	8.9	9.7
10°-20°	21.3	23.4
20°-30°	24.0	26.4
30°-40°	19.2	21.1
40°-50°	9.9	10.8
50°-60°	3.7	4.1
60°-70°	2.4	2.7
70°-80°	1.3	1.4
80°-90°	0.4	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	54.2	59.5
0°-40°	73.3	80.5
0°-60°	86.9	95.5
0°-90°	91.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	91.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	98	
5°	96	9
15°	77	21
25°	52	24
35°	31	19
45°	12	10
55°	4	4
65°	2	2
75°	1	1
85°	0	0
90°	0	

TEST NUMBER: P1248069

CATALOG NUMBER: P3AS02R309027DE010 E3DLD1GPH

CANDELA DISTRIBUTION (FULL):

0°	
0°	98.0
1°	98.0
2°	97.7
3°	97.1
4°	96.4
5°	95.5
6°	94.4
7°	92.9
8°	91.3
9°	89.6
10°	87.8
11°	85.8
12°	83.6
13°	81.4
14°	79.1
15°	76.6
17.5°	70.3
20°	64.1
22.5°	58.1
25°	52.4
27.5°	46.8
30°	41.5
32.5°	36.2
35°	30.8
37.5°	25.6
40°	20.7
42.5°	16.3
45°	12.5
47.5°	9.3
50°	6.5
52.5°	4.6
55°	3.8
57.5°	3.5
60°	3.1
62.5°	2.8
65°	2.5
67.5°	2.1
70°	1.8
72.5°	1.5
75°	1.2
77.5°	1.0
80°	0.8
82.5°	0.6
85°	0.3
87.5°	0.1



TEST NUMBER: P1248069

CATALOG NUMBER: P3AS02R309027DE010 E3DLD1GPH

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)