

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1248392

Luminaire Tested: P3AS05R159027DE010 E3DLP1GPH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1248392
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-1)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R159027DE010 E3DLP1GPH
Description: 3in Adjustable LED luminaire with, R15 optic, 2700K CCT AND, 90CRI , E3DLP1GPH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 141.0 lumens
Efficiency: N/A
Efficacy: 19.6 lumens/watt
Spacing Criteria (0/90/45): 0.52 / 0.52 / 0.61
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1248392

CATALOG NUMBER: P3AS05R159027DE010 E3DLP1GPH

Luminous Intensity Polar Plot

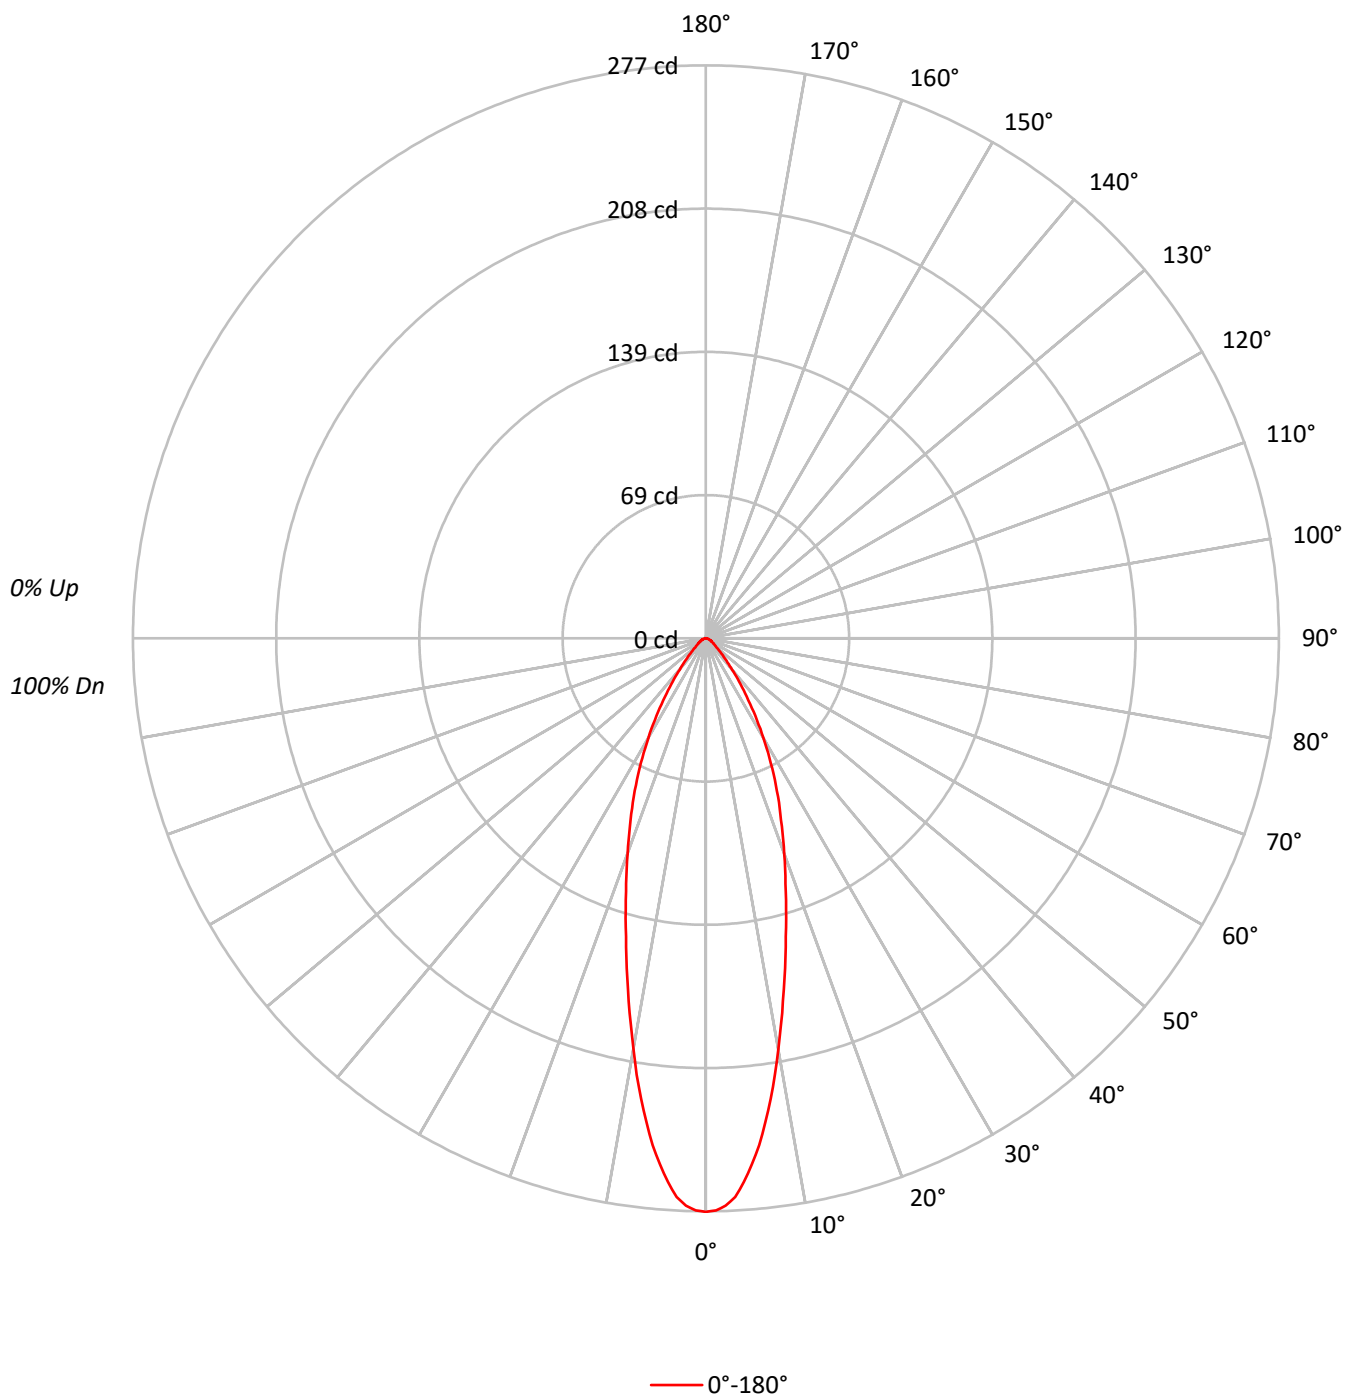

TEST NUMBER: P1248392

CATALOG NUMBER: P3AS05R159027DE010 E3DLP1GPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					30					10					0
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	113	110	108	106		111	108	106	104		104	102	101		100	99	98		97	96	95
2	108	103	98	95		105	101	97	94		98	95	92		95	92	90		92	90	88
3	102	96	91	87		100	94	90	86		92	88	85		89	86	83		87	84	82
4	97	90	84	80		95	88	83	79		86	82	78		84	81	78		82	79	77
5	93	84	78	74		91	83	78	74		81	77	73		80	76	72		78	75	72
6	88	79	73	69		87	79	73	69		77	72	69		76	71	68		74	71	68
7	84	75	69	65		83	74	69	65		73	68	64		72	67	64		71	67	64
8	80	71	65	61		79	71	65	61		69	64	61		68	64	61		67	63	60
9	77	68	62	58		76	67	62	58		66	61	58		65	61	57		64	60	57
10	74	64	59	55		73	64	59	55		63	58	55		62	58	55		62	57	54

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	60807
5°	56196
10°	44867
15°	33893
20°	25809
25°	19670
30°	14078
35°	9182
40°	5639
45°	3411
50°	2252
55°	1759
60°	1491
65°	1297
70°	1154
75°	1186
80°	884
85°	503

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 3411 cd/sqm

TEST NUMBER: P1248392

CATALOG NUMBER: P3AS05R159027DE010 E3DLP1GPH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	22.6	16.0
10°-20°	41.7	29.6
20°-30°	37.1	26.3
30°-40°	22.0	15.6
40°-50°	9.0	6.4
50°-60°	4.2	3.0
60°-70°	2.6	1.8
70°-80°	1.4	1.0
80°-90°	0.3	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	101.5	72.0
0°-40°	123.4	87.6
0°-60°	136.7	97.0
0°-90°	141.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	141.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	277	
5°	255	23
15°	149	42
25°	81	37
35°	34	22
45°	11	9
55°	5	4
65°	2	3
75°	1	1
85°	0	0
90°	0	

TEST NUMBER: P1248392

CATALOG NUMBER: P3AS05R159027DE010 E3DLP1GPH

CANDELA DISTRIBUTION (FULL):

0°	
0°	277.3
1°	276.6
2°	274.5
3°	270.4
4°	263.5
5°	255.3
6°	246.4
7°	235.8
8°	224.8
9°	213.6
10°	201.5
12.5°	173.8
15°	149.3
17.5°	128.2
20°	110.6
22.5°	95.0
25°	81.3
27.5°	68.0
30°	55.6
32.5°	44.4
35°	34.3
37.5°	26.3
40°	19.7
42.5°	14.7
45°	11.0
47.5°	8.5
50°	6.6
52.5°	5.5
55°	4.6
57.5°	3.9
60°	3.4
62.5°	3.0
65°	2.5
67.5°	2.3
70°	1.8
72.5°	1.6
75°	1.4
77.5°	0.9
80°	0.7
82.5°	0.5
85°	0.2
87.5°	0.2
90°	0.0

(END OF REPORT)