

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1248412

Luminaire Tested: P3AS05R209027DE010 E3DL1GPH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1248412
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-7)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R209027DE010 E3DL1GPH
Description: 3in Adjustable LED luminaire with, R20 optic, 2700K CCT AND, 90CRI , E3DL1GPH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 237.0 lumens
Efficiency: N/A
Efficacy: 32.9 lumens/watt
Spacing Criteria (0/90/45): 0.44 / 0.44 / 0.46
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1248412

CATALOG NUMBER: P3AS05R209027DE010 E3DL1GPH

Luminous Intensity Polar Plot

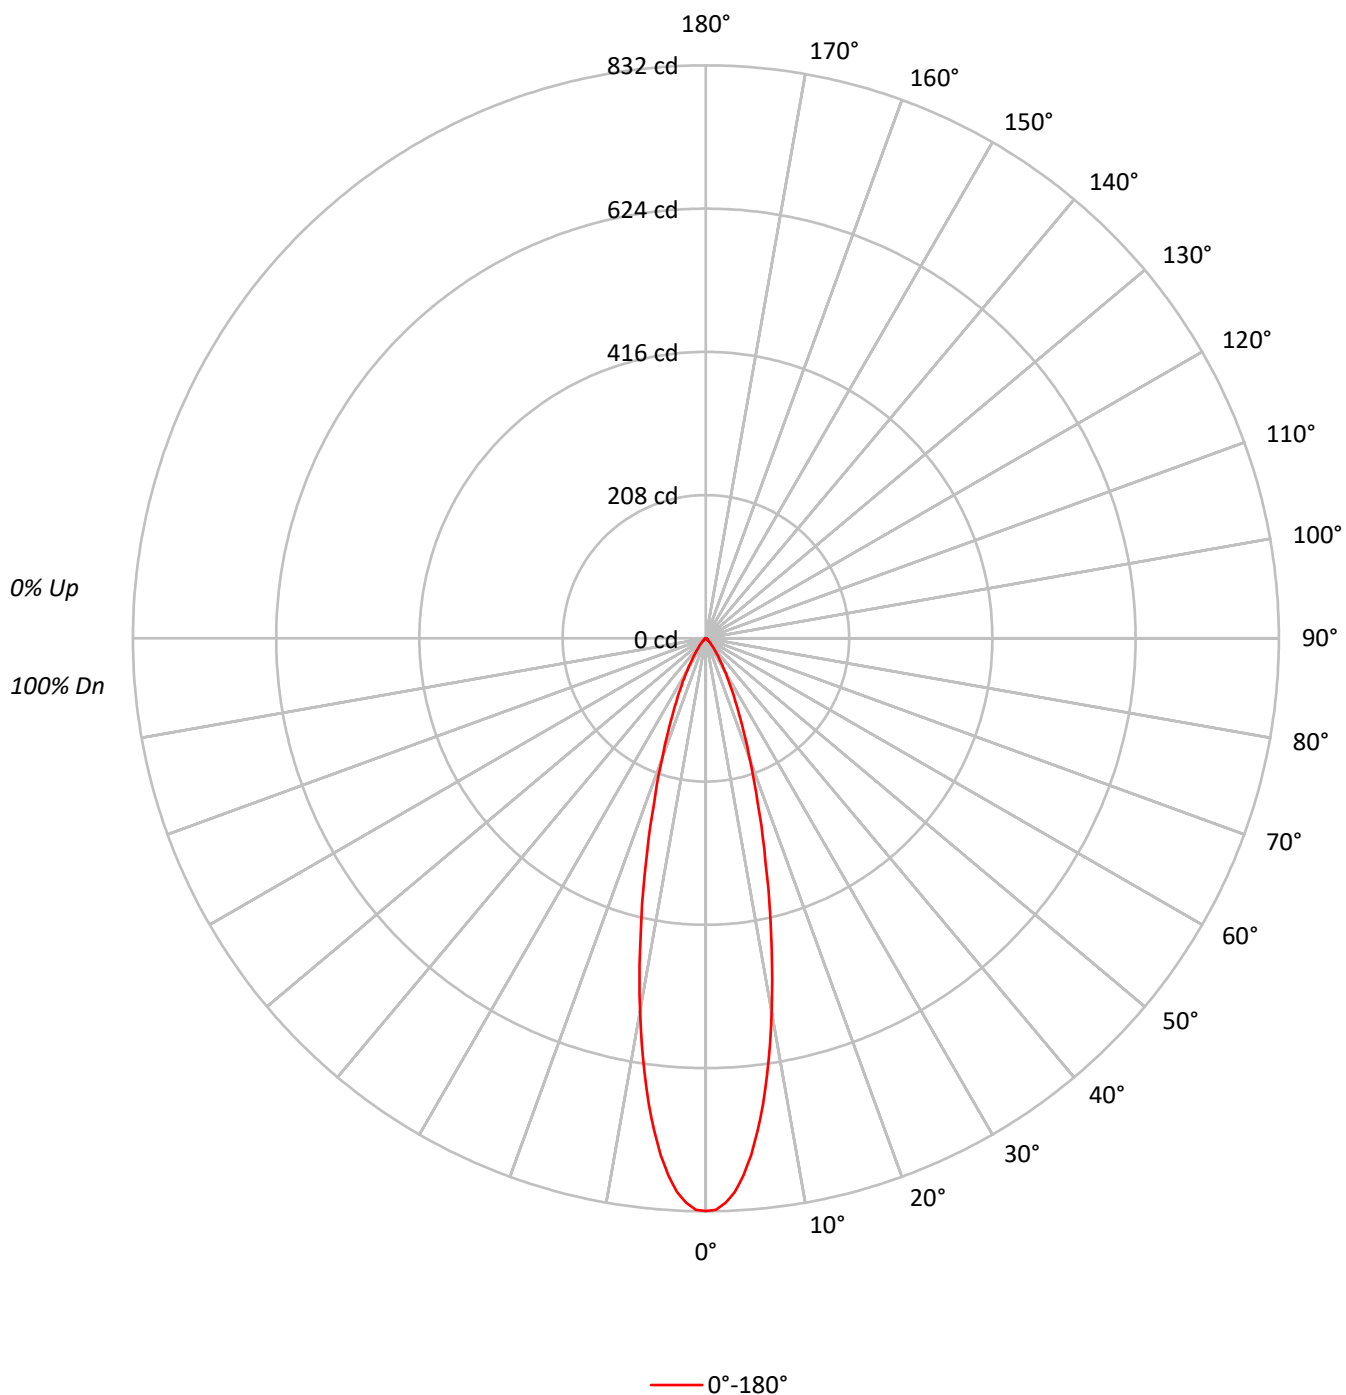

TEST NUMBER: P1248412

CATALOG NUMBER: P3AS05R209027DE010 E3DL1GPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10			0
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	114	112	110	108	112	110	108	106	106	104	103		102	101	100		99	98	97	95
2	110	106	102	100	108	104	101	98	101	98	96		98	96	94		95	94	92	91
3	106	100	96	93	104	99	95	92	97	93	91		94	92	89		92	90	88	87
4	102	96	91	88	100	95	90	87	92	89	86		91	88	85		89	86	84	83
5	98	91	87	83	97	90	86	83	89	85	82		87	84	81		86	83	81	79
6	95	87	83	79	93	87	82	79	85	81	78		84	81	78		83	80	77	76
7	91	84	79	76	90	83	79	76	82	78	75		81	78	75		80	77	75	73
8	88	81	76	73	87	80	76	73	79	75	72		78	75	72		78	74	72	71
9	85	78	73	70	85	77	73	70	77	73	70		76	72	69		75	72	69	68
10	83	75	71	68	82	75	70	67	74	70	67		73	70	67		73	69	67	66

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	182354
5°	165749
10°	122509
15°	75778
20°	43287
25°	24703
30°	13850
35°	7549
40°	4122
45°	2264
50°	1330
55°	956
60°	921
65°	830
70°	705
75°	763
80°	631
85°	503

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 2264 cd/sqm

TEST NUMBER: P1248412

CATALOG NUMBER: P3AS05R209027DE010 E3DL1GPH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	65.2	27.5
10°-20°	93.1	39.3
20°-30°	48.6	20.5
30°-40°	18.8	7.9
40°-50°	6.1	2.6
50°-60°	2.4	1.0
60°-70°	1.6	0.7
70°-80°	0.9	0.4
80°-90°	0.3	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	206.9	87.3
0°-40°	225.7	95.2
0°-60°	234.2	98.8
0°-90°	237.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	237.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	832	
5°	753	65
15°	334	93
25°	102	49
35°	28	19
45°	7	6
55°	2	2
65°	2	2
75°	1	1
85°	0	0
90°	0	

TEST NUMBER: P1248412

CATALOG NUMBER: P3AS05R209027DE010 E3DL1GPH

CANDELA DISTRIBUTION (FULL):

0°	
0°	831.6
1°	830.0
2°	820.1
3°	805.0
4°	781.6
5°	753.0
6°	719.1
7°	681.6
8°	638.1
9°	595.7
10°	550.2
12.5°	437.3
15°	333.8
17.5°	249.8
20°	185.5
22.5°	137.4
25°	102.1
27.5°	75.3
30°	54.7
32.5°	39.6
35°	28.2
37.5°	20.4
40°	14.4
42.5°	10.3
45°	7.3
47.5°	5.3
50°	3.9
52.5°	3.0
55°	2.5
57.5°	2.3
60°	2.1
62.5°	1.8
65°	1.6
67.5°	1.4
70°	1.1
72.5°	1.1
75°	0.9
77.5°	0.7
80°	0.5
82.5°	0.5
85°	0.2
87.5°	0.2
90°	0.0

(END OF REPORT)