

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1248431

Luminaire Tested: P3AS05R259027DE010 E3CD1MMS

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1248431
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-12)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R259027DE010 E3CD1MMS
Description: 3in Adjustable LED luminaire with, R25 optic, 2700K CCT AND, 90CRI , E3CD1MMS TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 595.0 lumens
Efficiency: N/A
Efficacy: 82.6 lumens/watt
Spacing Criteria (0/90/45): 0.45 / 0.45 / 0.41
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1248431

CATALOG NUMBER: P3AS05R259027DE010 E3CD1MMS

Luminous Intensity Polar Plot

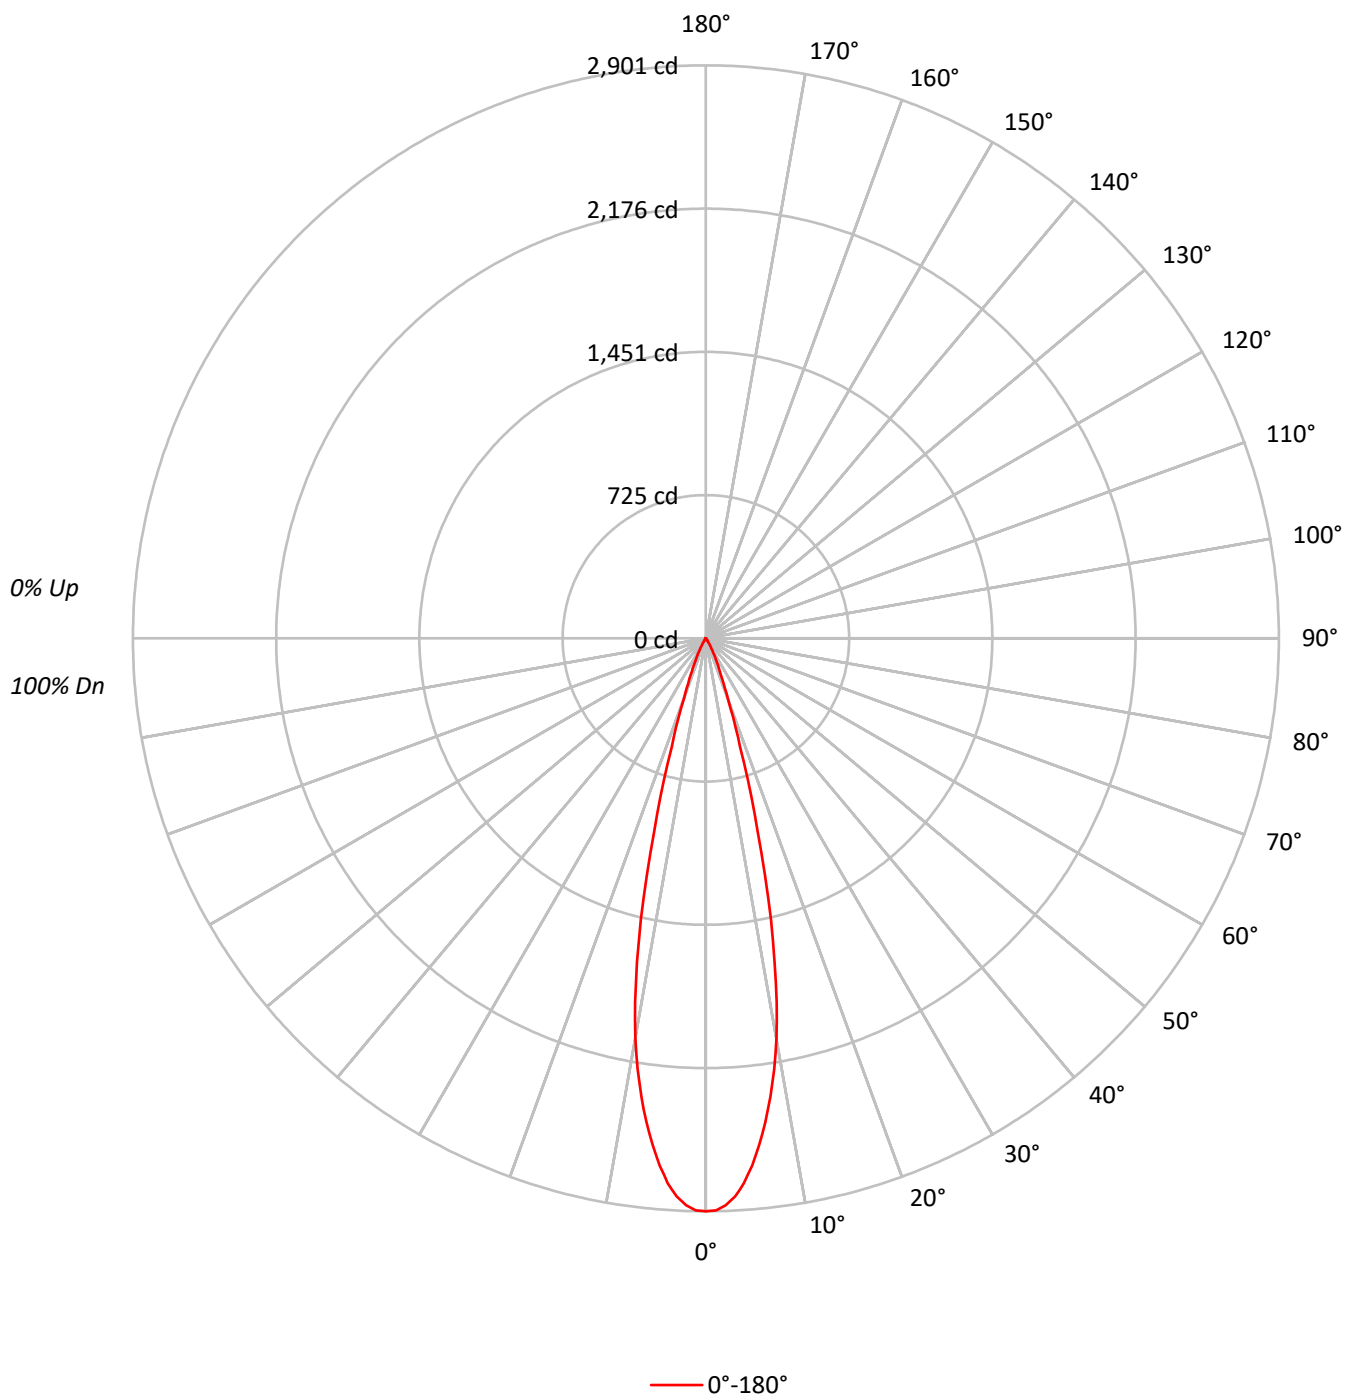

TEST NUMBER: P1248431

CATALOG NUMBER: P3AS05R259027DE010 E3CD1MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	99	99
1	115	113	111	110	113	111	109	108	107	106	105	103	103	102	100	99	99	97	96	96
2	112	108	105	103	110	107	104	102	104	102	100	101	99	98	98	97	96	94	93	93
3	108	104	101	98	107	103	100	97	100	98	96	98	96	94	96	94	93	92	91	91
4	105	100	97	94	104	99	96	93	97	95	92	96	93	91	94	92	90	89	88	88
5	103	97	93	90	101	96	93	90	95	92	89	93	91	89	92	90	88	87	86	86
6	100	94	90	87	99	93	90	87	92	89	87	91	88	86	90	87	86	85	84	84
7	97	91	88	85	96	91	87	85	90	87	84	89	86	84	88	85	83	83	82	82
8	95	89	85	83	94	89	85	82	88	84	82	87	84	82	86	83	81	81	80	80
9	93	87	83	80	92	86	83	80	86	82	80	85	82	80	84	82	80	79	78	78
10	91	85	81	78	90	84	81	78	84	80	78	83	80	78	82	80	78	77	76	76

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	636133
5°	590005
10°	457551
15°	229422
20°	75373
25°	29978
30°	11242
35°	3266
40°	1460
45°	589
50°	478
55°	344
60°	395
65°	467
70°	321
75°	424
80°	631
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 80°

Luminance: 631 cd/sqm

TEST NUMBER: P1248431

CATALOG NUMBER: P3AS05R259027DE010 E3CD1MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	235.8	39.6
10°-20°	281.3	47.3
20°-30°	63.4	10.7
30°-40°	10.3	1.7
40°-50°	1.9	0.3
50°-60°	1.0	0.2
60°-70°	0.8	0.1
70°-80°	0.5	0.1
80°-90°	0.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	580.4	97.6
0°-40°	590.7	99.3
0°-60°	593.6	99.8
0°-90°	595.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	595.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2901	
5°	2680	236
15°	1011	281
25°	124	63
35°	12	10
45°	2	2
55°	1	1
65°	1	1
75°	0	1
85°	0	0
90°	0	



TEST NUMBER: P1248431

CATALOG NUMBER: P3AS05R259027DE010 E3CD1MMS

CANDELA DISTRIBUTION (FULL):

0°	
0°	2901.0
1°	2896.4
2°	2873.0
3°	2830.0
4°	2765.0
5°	2680.4
6°	2579.4
7°	2470.0
8°	2344.8
9°	2207.8
10°	2054.9
11°	1878.7
12°	1675.8
13°	1463.6
14°	1236.0
15°	1010.6
17.5°	575.9
20°	323.0
22.5°	194.9
25°	123.9
27.5°	76.2
30°	44.4
32.5°	23.4
35°	12.2
37.5°	7.9
40°	5.1
42.5°	3.3
45°	1.9
47.5°	1.4
50°	1.4
52.5°	1.4
55°	0.9
57.5°	0.9
60°	0.9
62.5°	0.9
65°	0.9
67.5°	0.9
70°	0.5
72.5°	0.5
75°	0.5
77.5°	0.5
80°	0.5
82.5°	0.0
85°	0.0
87.5°	0.0



TEST NUMBER: P1248431
CATALOG NUMBER: P3AS05R259027DE010 E3CD1MMS

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)