

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1248475

Luminaire Tested: P3AS05R309027DE010 E3DL1WMH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1248475
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-15)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R309027DE010 E3DL1WMH
Description: 3in Adjustable LED luminaire with, R30 optic, 2700K CCT AND, 90CRI , E3DL1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 495.0 lumens
Efficiency: N/A
Efficacy: 68.7 lumens/watt
Spacing Criteria (0/90/45): 0.54 / 0.54 / 0.54
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1248475

CATALOG NUMBER: P3AS05R309027DE010 E3DL1WMH

Luminous Intensity Polar Plot

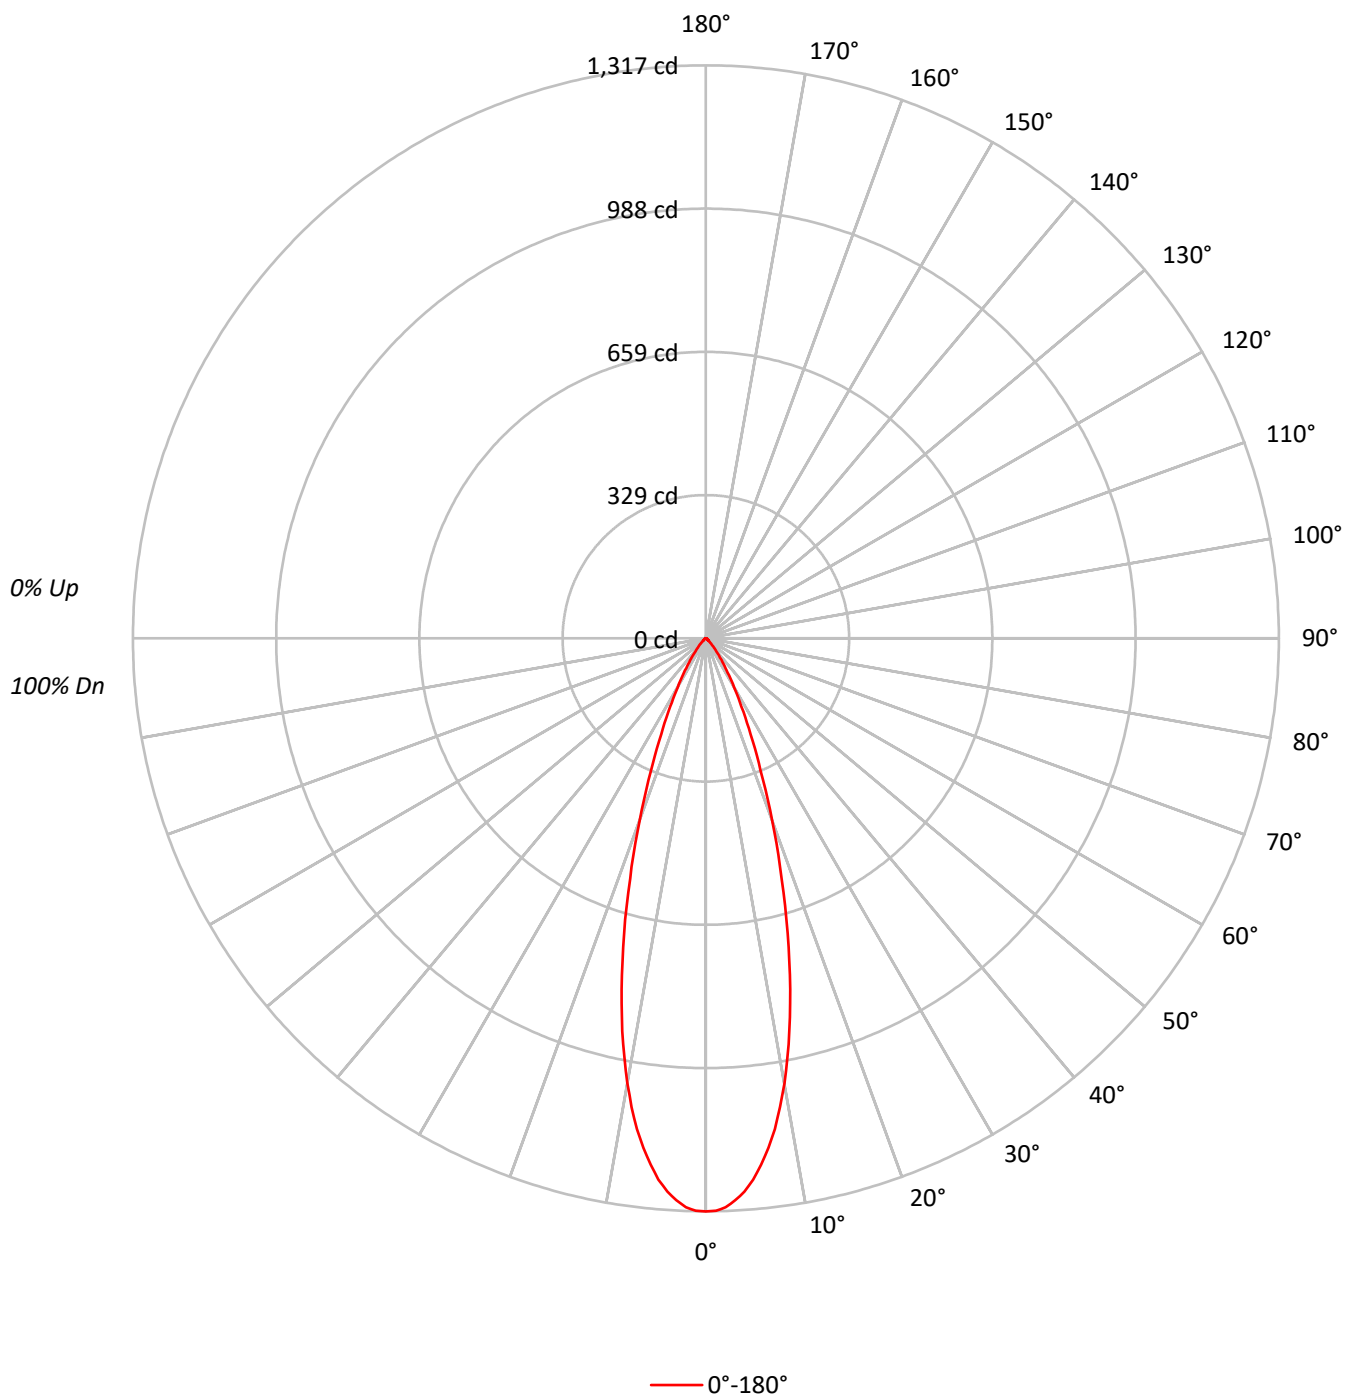

TEST NUMBER: P1248475

CATALOG NUMBER: P3AS05R309027DE010 E3DL1WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	112	110	108	112	110	108	106	106	104	103		102	101	100		99
2	110	105	102	99	107	104	101	98	101	98	96		98	96	94		95
3	105	100	96	92	103	98	95	91	96	93	90		94	91	89		91
4	101	95	90	87	99	94	89	86	92	88	85		90	87	84		88
5	97	90	85	82	96	89	85	81	88	84	81		86	83	80		85
6	94	86	81	78	92	85	81	77	84	80	77		83	79	76		81
7	90	82	77	74	89	82	77	74	81	76	73		80	76	73		79
8	87	79	74	71	86	79	74	71	78	73	70		77	73	70		76
9	84	76	71	68	83	75	71	68	75	70	67		74	70	67		73
10	81	73	68	65	80	73	68	65	72	68	65		71	67	65		71

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	288858
5°	274928
10°	231258
15°	166766
20°	103446
25°	58842
30°	32689
35°	17775
40°	9360
45°	5086
50°	2695
55°	1797
60°	1623
65°	1712
70°	1475
75°	1186
80°	1137
85°	1258

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 5086 cd/sqm

TEST NUMBER: P1248475

CATALOG NUMBER: P3AS05R309027DE010 E3DL1WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	112.5	22.7
10°-20°	199.9	40.4
20°-30°	115.6	23.3
30°-40°	43.9	8.9
40°-50°	13.5	2.7
50°-60°	4.5	0.9
60°-70°	3.1	0.6
70°-80°	1.7	0.3
80°-90°	0.5	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	427.9	86.5
0°-40°	471.8	95.3
0°-60°	489.8	98.9
0°-90°	495.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	495.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1317	
5°	1249	112
15°	735	200
25°	243	116
35°	66	44
45°	16	13
55°	5	5
65°	3	3
75°	1	2
85°	0	1
90°	0	

TEST NUMBER: P1248475

CATALOG NUMBER: P3AS05R309027DE010 E3DL1WMH

CANDELA DISTRIBUTION (FULL):

0°	
0°	1317.3
1°	1316.3
2°	1308.4
3°	1293.4
4°	1274.7
5°	1249.0
6°	1216.2
7°	1179.8
8°	1139.1
9°	1090.5
10°	1038.6
11°	982.4
12°	923.1
13°	860.9
14°	797.7
15°	734.6
17.5°	579.4
20°	443.3
22.5°	328.7
25°	243.2
27.5°	176.8
30°	129.1
32.5°	93.1
35°	66.4
37.5°	46.3
40°	32.7
42.5°	22.9
45°	16.4
47.5°	11.2
50°	7.9
52.5°	5.6
55°	4.7
57.5°	4.2
60°	3.7
62.5°	3.3
65°	3.3
67.5°	2.8
70°	2.3
72.5°	1.9
75°	1.4
77.5°	1.4
80°	0.9
82.5°	0.9
85°	0.5
87.5°	0.0



TEST NUMBER: P1248475
CATALOG NUMBER: P3AS05R309027DE010 E3DL1WMH

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)