

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1248630

Luminaire Tested: P3AS05R559027DE010 E3DLP1WMH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1248630
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-33)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R559027DE010 E3DLP1WMH
Description: 3in Adjustable LED luminaire with, R55 optic, 2700K CCT AND, 90CRI , E3DLP1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 340.0 lumens
Efficiency: N/A
Efficacy: 47.2 lumens/watt
Spacing Criteria (0/90/45): 0.77 / 0.77 / 0.8
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1248630

CATALOG NUMBER: P3AS05R559027DE010 E3DLP1WMH

Luminous Intensity Polar Plot

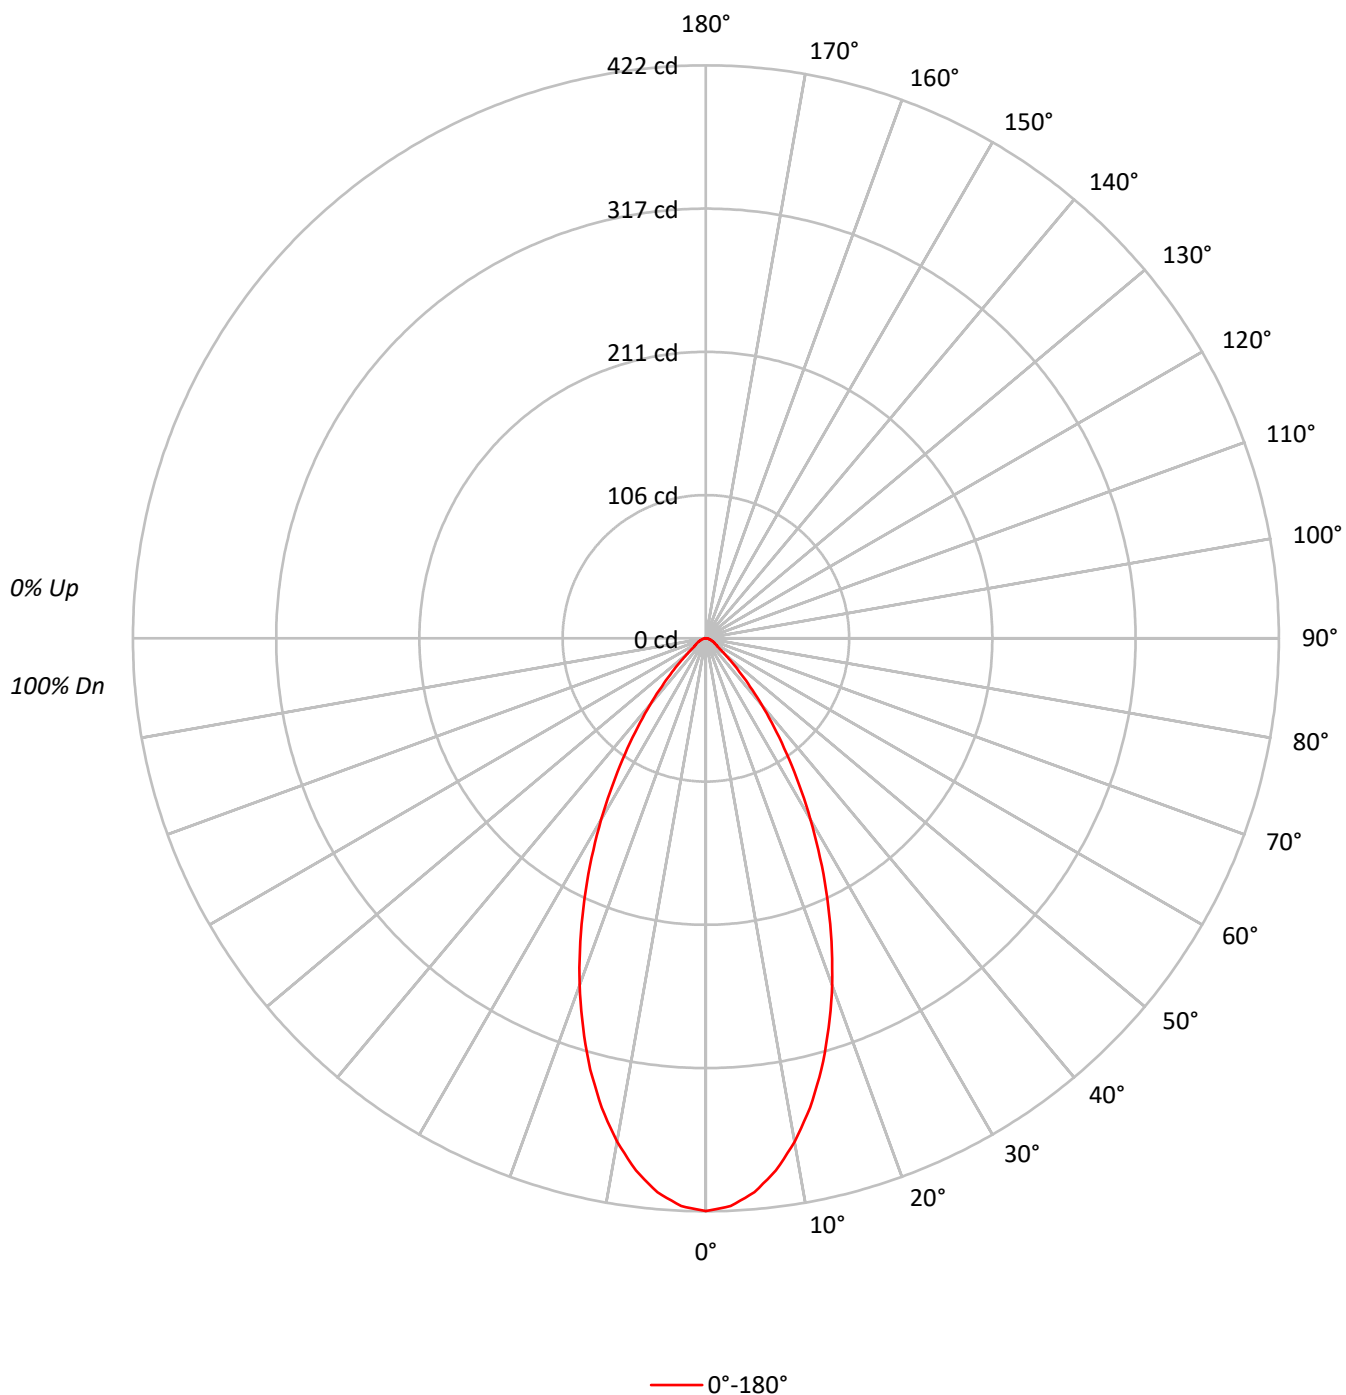

TEST NUMBER: P1248630

CATALOG NUMBER: P3AS05R559027DE010 E3DLP1WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	107	105	110	108	105	103	104	102	100		100	98	97		97
2	107	102	97	94	105	100	96	93	97	93	91		94	91	89		91
3	101	94	89	85	99	93	88	84	90	86	83		88	84	81		85
4	96	88	82	77	94	87	81	77	84	80	76		82	78	75		80
5	91	82	76	71	89	81	75	71	79	74	70		77	73	70		76
6	86	77	70	66	84	76	70	66	74	69	65		73	68	65		72
7	82	72	66	61	80	71	65	61	70	65	61		69	64	60		68
8	78	68	62	57	76	67	61	57	66	61	57		65	60	57		64
9	74	64	58	54	73	63	58	54	62	57	53		62	57	53		61
10	70	60	55	51	69	60	54	50	59	54	50		58	54	50		58

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	92493
5°	90160
10°	83833
15°	74643
20°	63449
25°	51197
30°	39019
35°	27760
40°	18320
45°	10854
50°	6379
55°	3938
60°	3465
65°	3165
70°	2693
75°	2372
80°	2399
85°	2264

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 10854 cd/sqm

TEST NUMBER: P1248630

CATALOG NUMBER: P3AS05R559027DE010 E3DLP1WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	38.0	11.2
10°-20°	91.2	26.8
20°-30°	96.6	28.4
30°-40°	65.2	19.2
40°-50°	28.6	8.4
50°-60°	10.2	3.0
60°-70°	6.0	1.8
70°-80°	3.1	0.9
80°-90°	1.0	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	225.8	66.4
0°-40°	291.0	85.6
0°-60°	329.8	97.0
0°-90°	340.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	340.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	422	
5°	410	38
15°	329	91
25°	212	97
35°	104	65
45°	35	29
55°	10	10
65°	6	6
75°	3	3
85°	1	1
90°	0	

TEST NUMBER: P1248630

CATALOG NUMBER: P3AS05R559027DE010 E3DLP1WMH

CANDELA DISTRIBUTION (FULL):

0°	
0°	421.8
2.5°	418.5
5°	409.6
7.5°	395.2
10°	376.5
12.5°	354.1
15°	328.8
17.5°	300.8
20°	271.9
22.5°	241.5
25°	211.6
27.5°	182.2
30°	154.1
32.5°	127.5
35°	103.7
37.5°	82.2
40°	64.0
42.5°	48.1
45°	35.0
47.5°	25.7
50°	18.7
52.5°	13.1
55°	10.3
57.5°	9.3
60°	7.9
62.5°	7.0
65°	6.1
67.5°	5.1
70°	4.2
72.5°	3.7
75°	2.8
77.5°	2.3
80°	1.9
82.5°	1.4
85°	0.9
87.5°	0.5
90°	0.0

(END OF REPORT)