

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1248682

Luminaire Tested: P3AS05R659027DE010 E3DLD1WMH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1248682
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-42)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R659027DE010 E3DLD1WMH
Description: 3in Adjustable LED luminaire with, R65 optic, 2700K CCT AND, 90CRI , E3DLD1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 368.0 lumens
Efficiency: N/A
Efficacy: 51.1 lumens/watt
Spacing Criteria (0/90/45): 0.95 / 0.95 / 1
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1248682

CATALOG NUMBER: P3AS05R659027DE010 E3DLD1WMH

Luminous Intensity Polar Plot

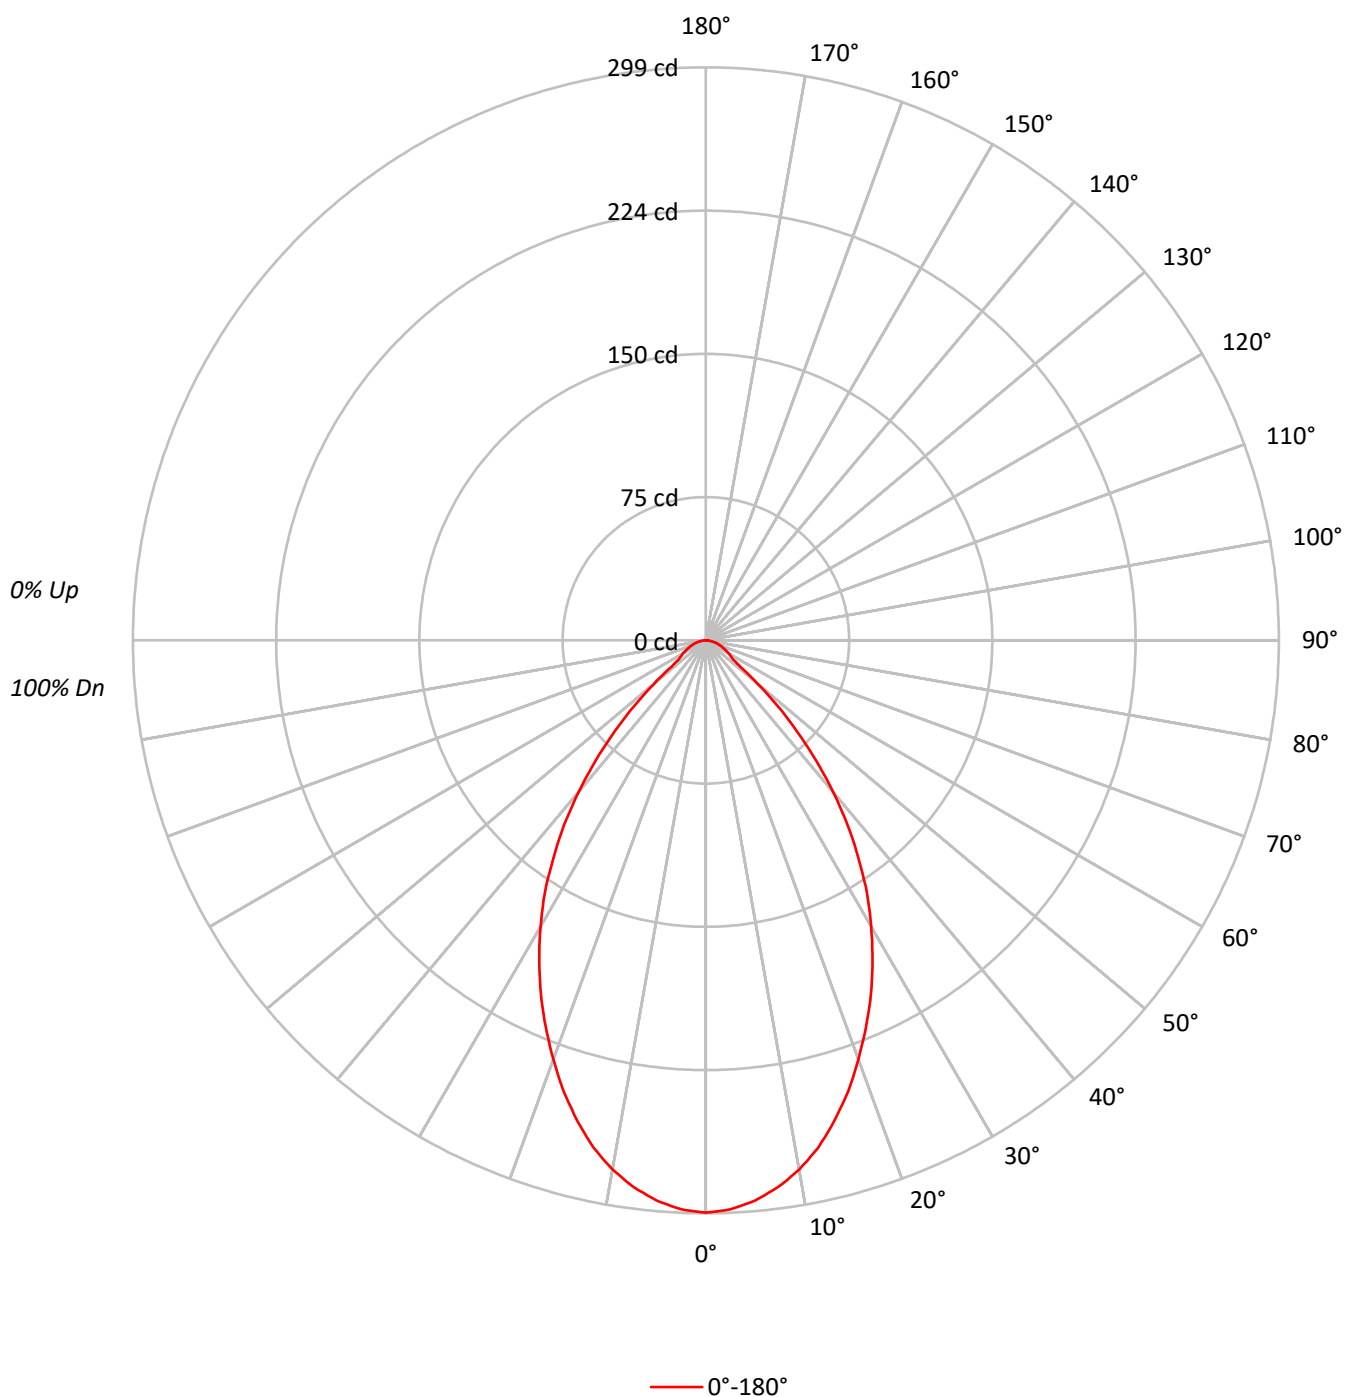

TEST NUMBER: P1248682

CATALOG NUMBER: P3AS05R659027DE010 E3DLD1WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	112	109	106	103	110	107	104	101	102	100	98		99	97	95		95
2	105	99	94	90	103	97	93	89	94	90	87		91	88	85		88
3	99	91	85	80	96	89	84	79	87	82	78		84	80	77		82
4	92	83	77	72	90	82	76	71	80	75	70		78	73	70		76
5	87	77	70	65	85	76	69	65	74	68	64		72	67	63		71
6	82	71	64	59	80	70	64	59	69	63	58		67	62	58		66
7	77	66	59	54	75	65	59	54	64	58	54		63	57	53		61
8	72	61	55	50	71	61	54	50	60	54	49		59	53	49		58
9	68	57	51	46	67	57	50	46	56	50	46		55	49	46		54
10	65	54	47	43	64	53	47	43	52	47	43		52	46	42		51

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	65477
5°	64605
10°	62435
15°	58888
20°	54301
25°	49309
30°	43678
35°	37156
40°	29570
45°	20870
50°	12110
55°	6614
60°	6140
65°	5552
70°	5065
75°	4745
80°	4167
85°	3522

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 20870 cd/sqm

TEST NUMBER: P1248682

CATALOG NUMBER: P3AS05R659027DE010 E3DLD1WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	27.6	7.5
10°-20°	72.6	19.7
20°-30°	93.3	25.3
30°-40°	86.3	23.4
40°-50°	52.1	14.2
50°-60°	17.7	4.8
60°-70°	10.7	2.9
70°-80°	6.0	1.6
80°-90°	1.7	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	193.4	52.6
0°-40°	279.7	76.0
0°-60°	349.5	95.0
0°-90°	368.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	368.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	299	
5°	294	28
15°	259	73
25°	204	93
35°	139	86
45°	67	52
55°	17	18
65°	11	11
75°	6	6
85°	1	2
90°	0	

TEST NUMBER: P1248682

CATALOG NUMBER: P3AS05R659027DE010 E3DLD1WMH

CANDELA DISTRIBUTION (FULL):

0°	
0°	298.6
2.5°	297.2
5°	293.5
7.5°	287.9
10°	280.4
12.5°	271.1
15°	259.4
17.5°	246.8
20°	232.7
22.5°	218.3
25°	203.8
27.5°	188.3
30°	172.5
32.5°	156.6
35°	138.8
37.5°	121.5
40°	103.3
42.5°	85.1
45°	67.3
47.5°	50.9
50°	35.5
52.5°	22.4
55°	17.3
57.5°	15.4
60°	14.0
62.5°	12.2
65°	10.7
67.5°	9.3
70°	7.9
72.5°	7.0
75°	5.6
77.5°	4.7
80°	3.3
82.5°	2.3
85°	1.4
87.5°	0.9
90°	0.0

(END OF REPORT)