

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1248756

Luminaire Tested: P3AS09R159027DE010 E3DL1GPH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1248756
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-3)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS09R159027DE010 E3DL1GPH
Description: 3in Adjustable LED luminaire with, R15 optic, 2700K CCT AND, 90CRI , E3DL1GPH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 348.0 lumens
Efficiency: N/A
Efficacy: 31.4 lumens/watt
Spacing Criteria (0/90/45): 0.4 / 0.4 / 0.43
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 11.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1248756

CATALOG NUMBER: P3AS09R159027DE010 E3DL1GPH

Luminous Intensity Polar Plot

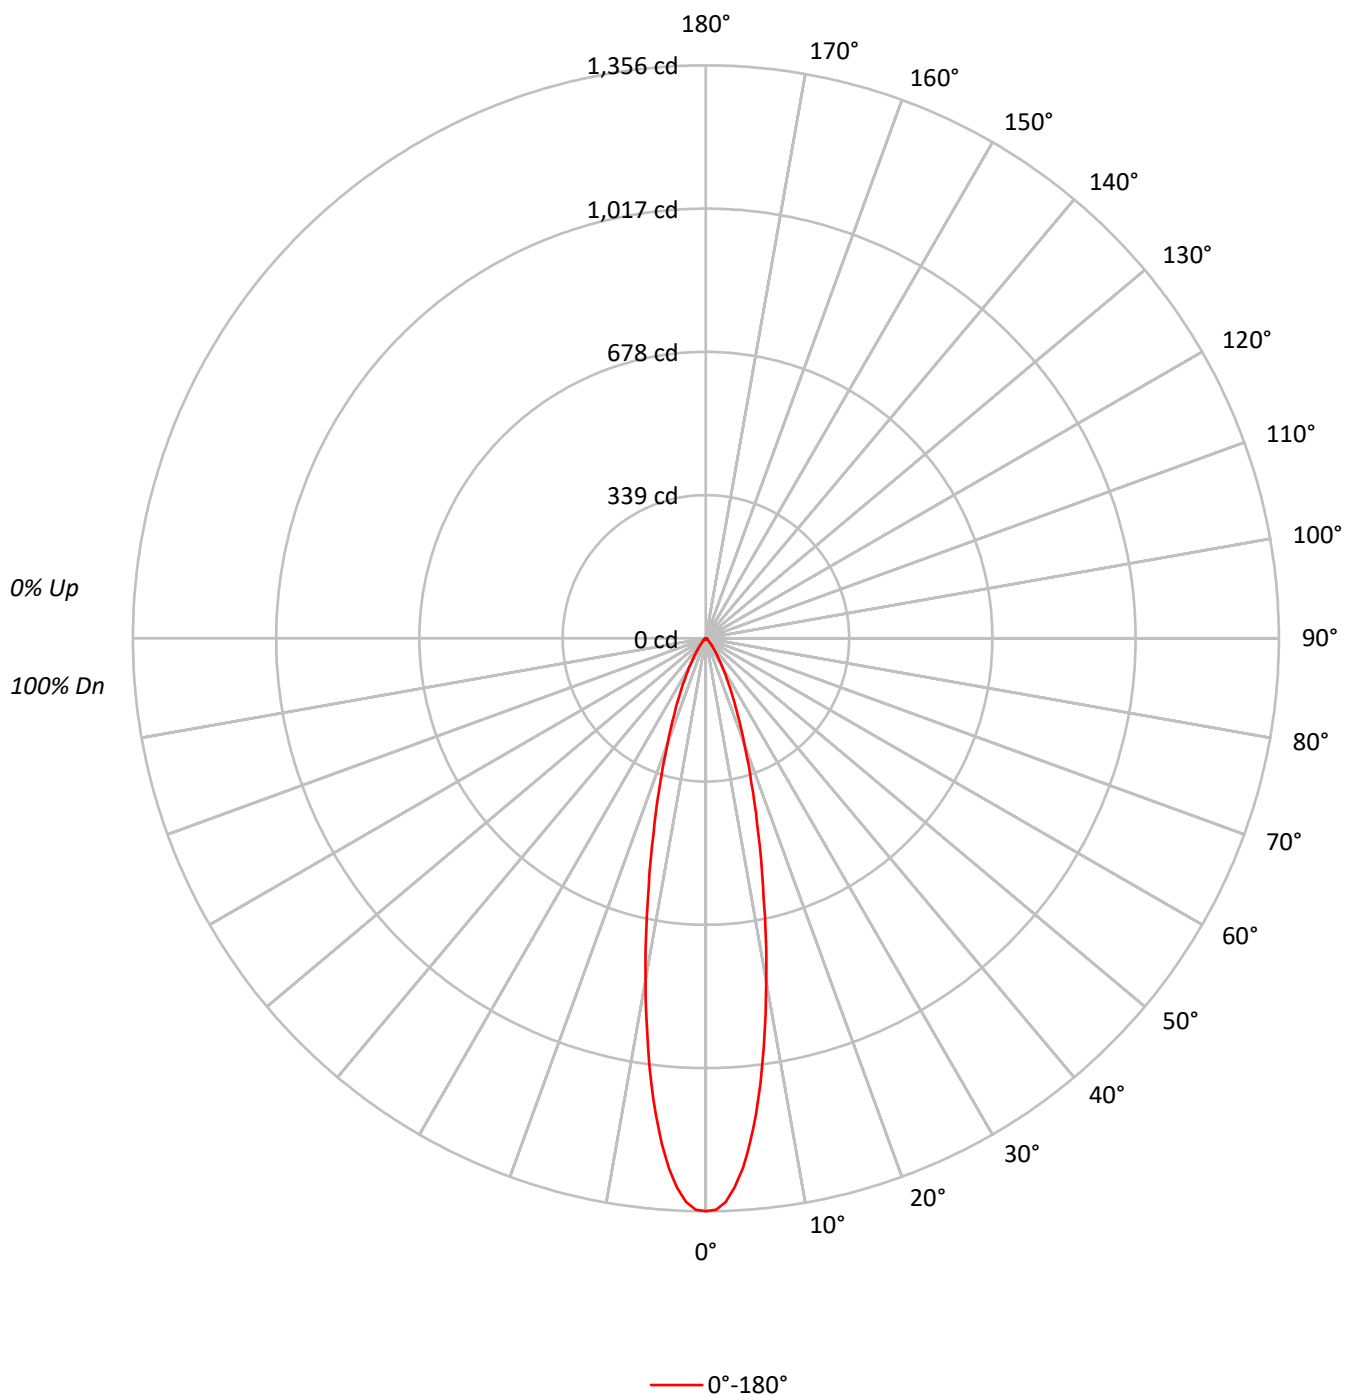

TEST NUMBER: P1248756

CATALOG NUMBER: P3AS09R159027DE010 E3DL1GPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10			0
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	114	112	110	108	112	110	108	106	106	104	103		102	101	100		99	98	97	95
2	110	106	103	100	108	104	101	99	101	99	97		98	96	95		96	94	93	91
3	106	101	97	93	104	99	96	93	97	94	91		94	92	90		92	90	88	87
4	102	96	92	88	100	95	91	88	93	89	87		91	88	86		89	87	85	83
5	98	92	87	84	97	91	87	83	89	85	83		88	84	82		86	83	81	80
6	95	88	83	80	94	87	83	80	86	82	79		85	81	79		83	80	78	77
7	92	85	80	77	91	84	80	76	83	79	76		82	78	76		81	78	75	74
8	89	81	77	74	88	81	77	73	80	76	73		79	75	73		78	75	73	72
9	86	79	74	71	85	78	74	71	77	73	71		77	73	70		76	73	70	69
10	84	76	71	68	83	76	71	68	75	71	68		74	71	68		74	70	68	67

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	297279
5°	263878
10°	183252
15°	108377
20°	61722
25°	35276
30°	19522
35°	10413
40°	5754
45°	3132
50°	1944
55°	1529
60°	1316
65°	1193
70°	1090
75°	1101
80°	884
85°	755

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 3132 cd/sqm

TEST NUMBER: P1248756

CATALOG NUMBER: P3AS09R159027DE010 E3DL1GPH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	101.9	29.3
10°-20°	134.5	38.7
20°-30°	69.3	19.9
30°-40°	26.0	7.5
40°-50°	8.5	2.4
50°-60°	3.7	1.1
60°-70°	2.3	0.7
70°-80°	1.4	0.4
80°-90°	0.4	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	305.8	87.9
0°-40°	331.8	95.3
0°-60°	344.0	98.8
0°-90°	348.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	348.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1356	
5°	1199	102
15°	477	135
25°	146	69
35°	39	26
45°	10	9
55°	4	4
65°	2	2
75°	1	1
85°	0	0
90°	0	

TEST NUMBER: P1248756

CATALOG NUMBER: P3AS09R159027DE010 E3DL1GPH

CANDELA DISTRIBUTION (FULL):

0°	
0°	1355.7
1°	1353.0
2°	1335.3
3°	1301.4
4°	1256.8
5°	1198.8
6°	1133.1
7°	1061.0
8°	980.9
9°	901.8
10°	823.0
12.5°	633.3
15°	477.4
17.5°	357.4
20°	264.5
22.5°	197.5
25°	145.8
27.5°	106.3
30°	77.1
32.5°	54.6
35°	38.9
37.5°	27.8
40°	20.1
42.5°	14.4
45°	10.1
47.5°	7.4
50°	5.7
52.5°	4.7
55°	4.0
57.5°	3.4
60°	3.0
62.5°	2.7
65°	2.3
67.5°	2.0
70°	1.7
72.5°	1.7
75°	1.3
77.5°	1.0
80°	0.7
82.5°	0.7
85°	0.3
87.5°	0.0
90°	0.0

(END OF REPORT)