

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1248817

Luminaire Tested: P3AS09R259027DE010 E3DL1MW

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1248817
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-11)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS09R259027DE010 E3DL1MW
Description: 3in Adjustable LED luminaire with, R25 optic, 2700K CCT AND, 90CRI , E3DL1MW TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 715.0 lumens
Efficiency: N/A
Efficacy: 64.4 lumens/watt
Spacing Criteria (0/90/45): 0.49 / 0.49 / 0.51
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 11.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1248817

CATALOG NUMBER: P3AS09R259027DE010 E3DL1MW

Luminous Intensity Polar Plot

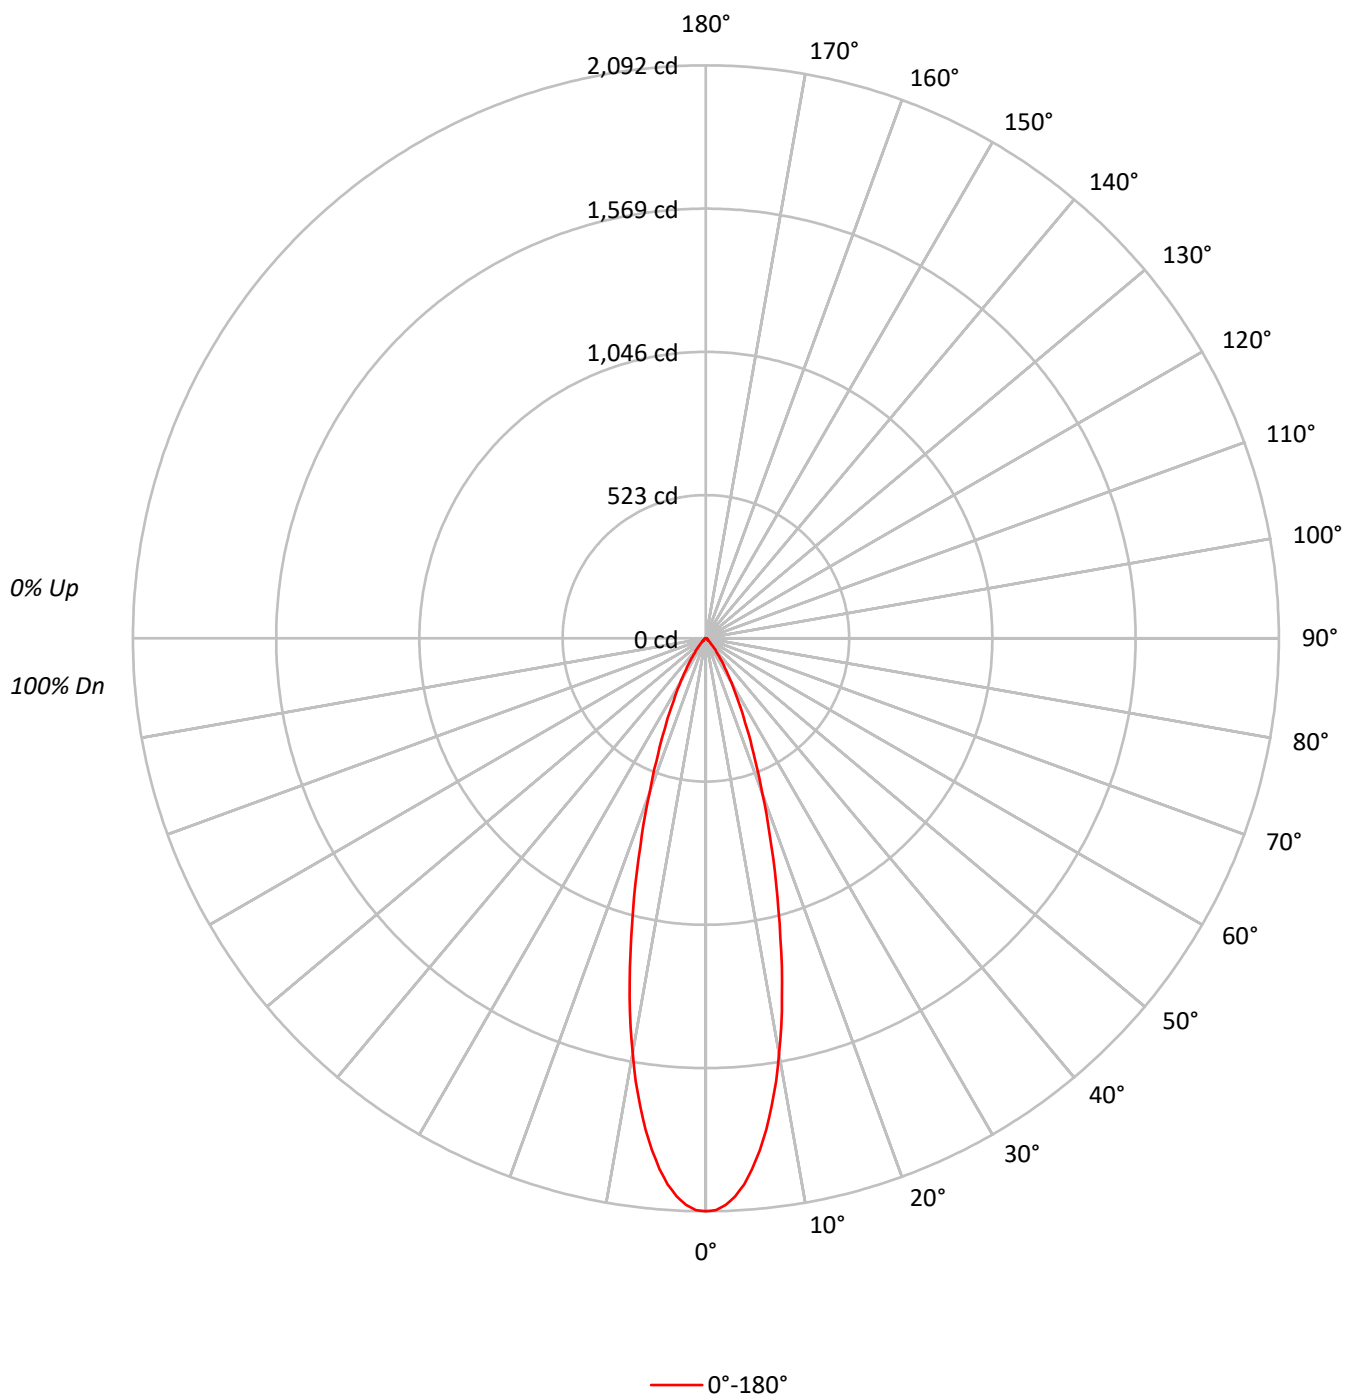

TEST NUMBER: P1248817

CATALOG NUMBER: P3AS09R259027DE010 E3DL1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	114	112	110	108		112	110	108	106		106	104	103		102	101	100		99	98	97
2	110	105	102	99		107	104	101	98		101	98	96		98	96	94		95	93	92
3	105	100	96	92		103	98	95	91		96	93	90		94	91	89		91	89	87
4	101	95	90	87		99	94	89	86		92	88	85		90	87	84		88	85	83
5	97	90	85	82		96	89	85	81		88	84	81		86	83	80		85	82	79
6	94	86	81	78		92	86	81	78		84	80	77		83	79	77		82	78	76
7	90	83	78	74		89	82	77	74		81	77	74		80	76	73		79	75	73
8	87	79	74	71		86	79	74	71		78	74	71		77	73	70		76	73	70
9	84	76	71	68		83	76	71	68		75	71	68		74	70	68		73	70	67
10	81	73	69	65		80	73	68	65		72	68	65		72	68	65		71	67	65

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	458647
5°	427910
10°	342790
15°	232691
20°	140806
25°	82335
30°	46893
35°	25779
40°	13683
45°	7195
50°	4196
55°	3135
60°	2675
65°	2854
70°	2629
75°	2288
80°	1768
85°	1761

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 7195 cd/sqm

TEST NUMBER: P1248817

CATALOG NUMBER: P3AS09R259027DE010 E3DL1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	172.5	24.1
10°-20°	281.8	39.4
20°-30°	161.0	22.5
30°-40°	63.5	8.9
40°-50°	19.5	2.7
50°-60°	7.7	1.1
60°-70°	5.2	0.7
70°-80°	2.9	0.4
80°-90°	1.0	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	615.3	86.1
0°-40°	678.8	94.9
0°-60°	706.0	98.7
0°-90°	715.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	715.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2092	
5°	1944	173
15°	1025	282
25°	340	161
35°	96	64
45°	23	19
55°	8	8
65°	6	5
75°	3	3
85°	1	1
90°	0	

TEST NUMBER: P1248817

CATALOG NUMBER: P3AS09R259027DE010 E3DL1MW

CANDELA DISTRIBUTION (FULL):

0°	
0°	2091.6
1°	2087.5
2°	2070.4
3°	2040.3
4°	1998.7
5°	1944.0
6°	1879.8
7°	1807.3
8°	1723.3
9°	1637.2
10°	1539.5
11°	1443.1
12°	1337.2
13°	1232.7
14°	1125.4
15°	1025.0
17.5°	794.7
20°	603.4
22.5°	453.0
25°	340.3
27.5°	252.1
30°	185.2
32.5°	133.9
35°	96.3
37.5°	68.3
40°	47.8
42.5°	32.8
45°	23.2
47.5°	16.4
50°	12.3
52.5°	9.6
55°	8.2
57.5°	7.5
60°	6.1
62.5°	5.5
65°	5.5
67.5°	4.8
70°	4.1
72.5°	3.4
75°	2.7
77.5°	2.0
80°	1.4
82.5°	1.4
85°	0.7
87.5°	0.7



TEST NUMBER: P1248817

CATALOG NUMBER: P3AS09R259027DE010 E3DL1MW

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)