

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1248885

Luminaire Tested: P3AS09R359027DE010 E3DLD1WMH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1248885
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-18)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS09R359027DE010 E3DLD1WMH
Description: 3in Adjustable LED luminaire with, R35 optic, 2700K CCT AND, 90CRI , E3DLD1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 553.0 lumens
Efficiency: N/A
Efficacy: 49.8 lumens/watt
Spacing Criteria (0/90/45): 0.8 / 0.8 / 0.87
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 11.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1248885

CATALOG NUMBER: P3AS09R359027DE010 E3DLD1WMH

Luminous Intensity Polar Plot

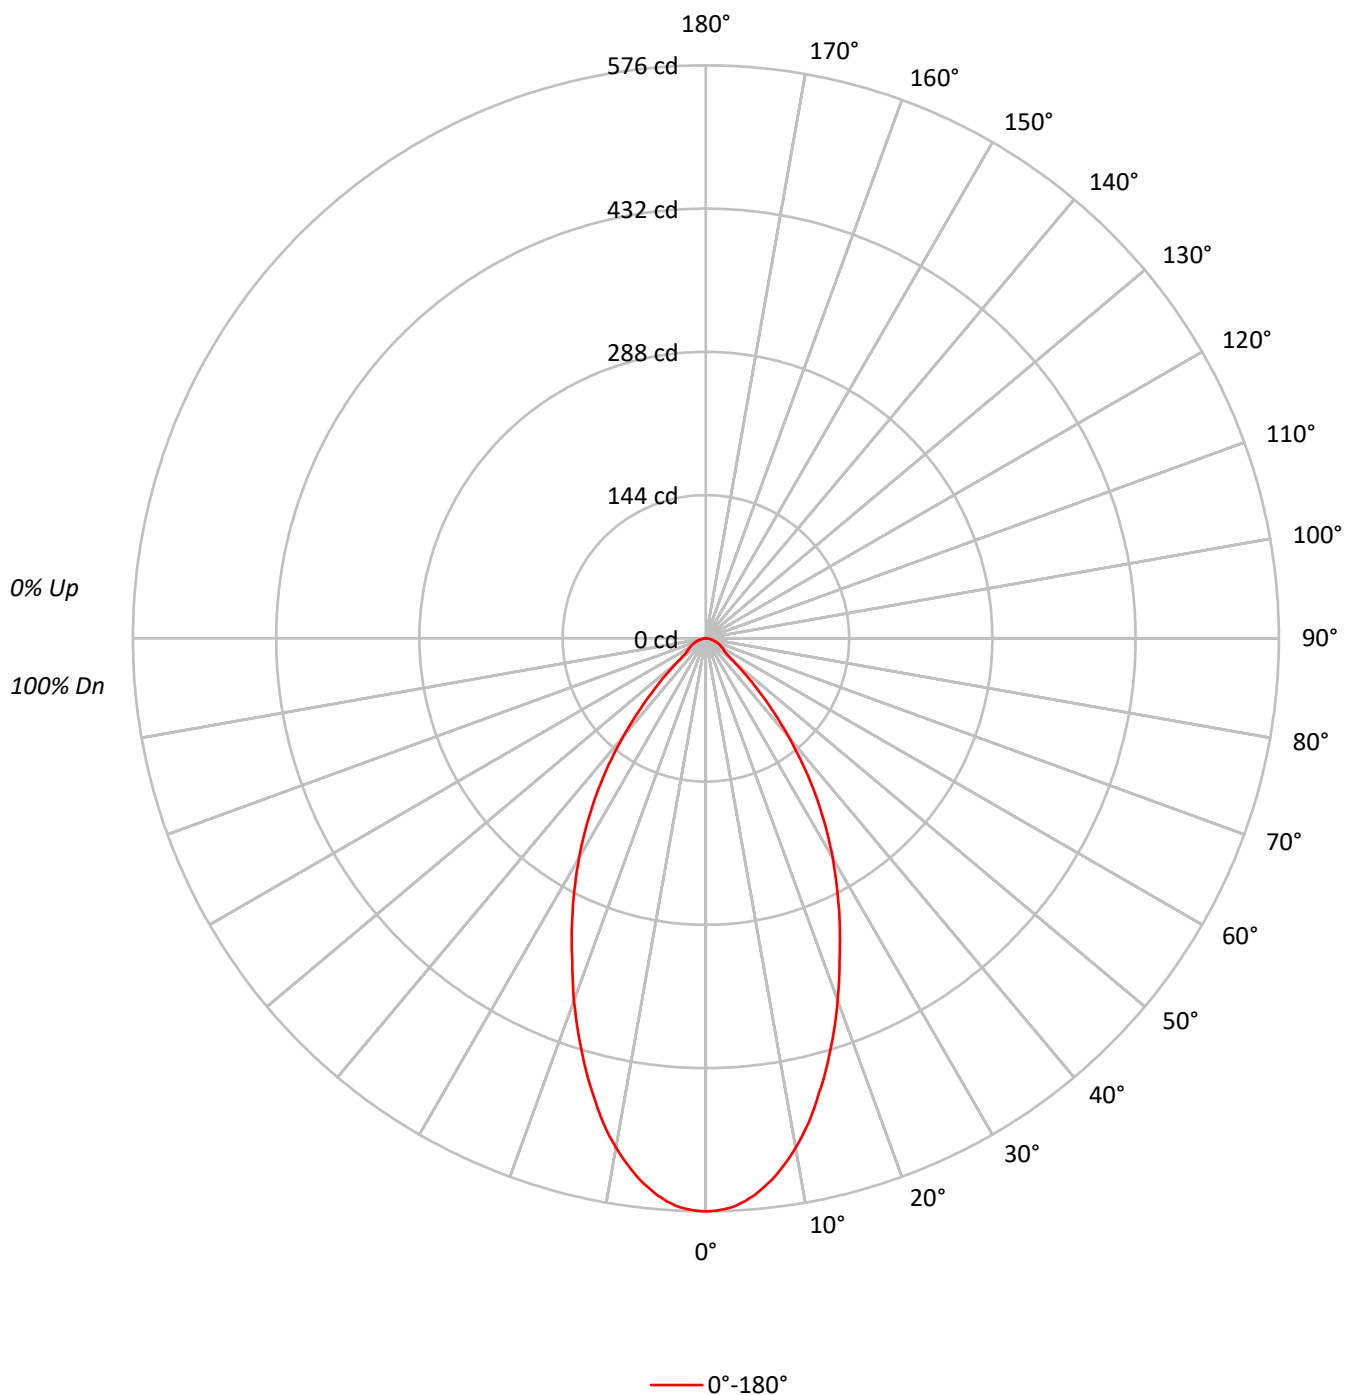

TEST NUMBER: P1248885

CATALOG NUMBER: P3AS09R359027DE010 E3DLD1WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	112	109	106	104	110	107	104	102	103	101	99		99	98	96		96
2	106	100	96	92	104	98	94	91	95	92	89		92	89	87		89
3	100	92	87	82	98	91	86	81	88	84	80		86	82	79		83
4	94	85	79	74	92	84	78	74	82	77	73		80	75	72		78
5	89	79	73	68	87	78	72	67	76	71	67		75	70	66		73
6	84	74	67	62	82	73	67	62	71	66	61		70	65	61		68
7	79	69	62	57	78	68	62	57	67	61	57		65	60	57		64
8	75	64	58	53	74	64	57	53	63	57	53		62	56	53		61
9	71	60	54	50	70	60	54	50	59	53	49		58	53	49		57
10	67	57	51	46	66	56	50	46	56	50	46		55	50	46		54

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	126328
5°	123640
10°	115785
15°	103951
20°	90425
25°	77037
30°	64542
35°	51397
40°	37155
45°	23537
50°	12827
55°	8869
60°	8377
65°	7783
70°	7437
75°	6354
80°	6061
85°	5284

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 23537 cd/sqm

TEST NUMBER: P1248885

CATALOG NUMBER: P3AS09R359027DE010 E3DLD1WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	52.3	9.5
10°-20°	127.4	23.0
20°-30°	146.0	26.4
30°-40°	119.2	21.5
40°-50°	60.1	10.9
50°-60°	22.3	4.0
60°-70°	15.0	2.7
70°-80°	8.3	1.5
80°-90°	2.5	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	325.7	58.9
0°-40°	444.8	80.4
0°-60°	527.2	95.3
0°-90°	553.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	553.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	576	
5°	562	52
15°	458	127
25°	318	146
35°	192	119
45°	76	60
55°	23	22
65°	15	15
75°	8	8
85°	2	3
90°	0	

TEST NUMBER: P1248885

CATALOG NUMBER: P3AS09R359027DE010 E3DLD1WMH

CANDELA DISTRIBUTION (FULL):

0°	
0°	576.1
1°	575.4
2°	574.0
3°	571.3
4°	567.2
5°	561.7
6°	554.9
7°	548.1
8°	539.2
9°	530.3
10°	520.0
11°	509.1
12°	497.5
13°	484.5
14°	470.8
15°	457.9
17.5°	423.0
20°	387.5
22.5°	351.2
25°	318.4
27.5°	286.3
30°	254.9
32.5°	223.5
35°	192.0
37.5°	160.6
40°	129.8
42.5°	101.1
45°	75.9
47.5°	54.7
50°	37.6
52.5°	27.3
55°	23.2
57.5°	21.2
60°	19.1
62.5°	17.1
65°	15.0
67.5°	13.0
70°	11.6
72.5°	9.6
75°	7.5
77.5°	6.2
80°	4.8
82.5°	3.4
85°	2.1
87.5°	1.4



TEST NUMBER: P1248885

CATALOG NUMBER: P3AS09R359027DE010 E3DLD1WMH

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)