

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1248972

Luminaire Tested: P3AS09R509027DE010 E3DLP1GPH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1248972
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-29)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS09R509027DE010 E3DLP1GPH
Description: 3in Adjustable LED luminaire with, R50 optic, 2700K CCT AND, 90CRI , E3DLP1GPH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 246.9 lumens
Efficiency: N/A
Efficacy: 22.2 lumens/watt
Spacing Criteria (0/90/45): 0.75 / 0.75 / 0.77
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 11.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1248972

CATALOG NUMBER: P3AS09R509027DE010 E3DLP1GPH

Luminous Intensity Polar Plot

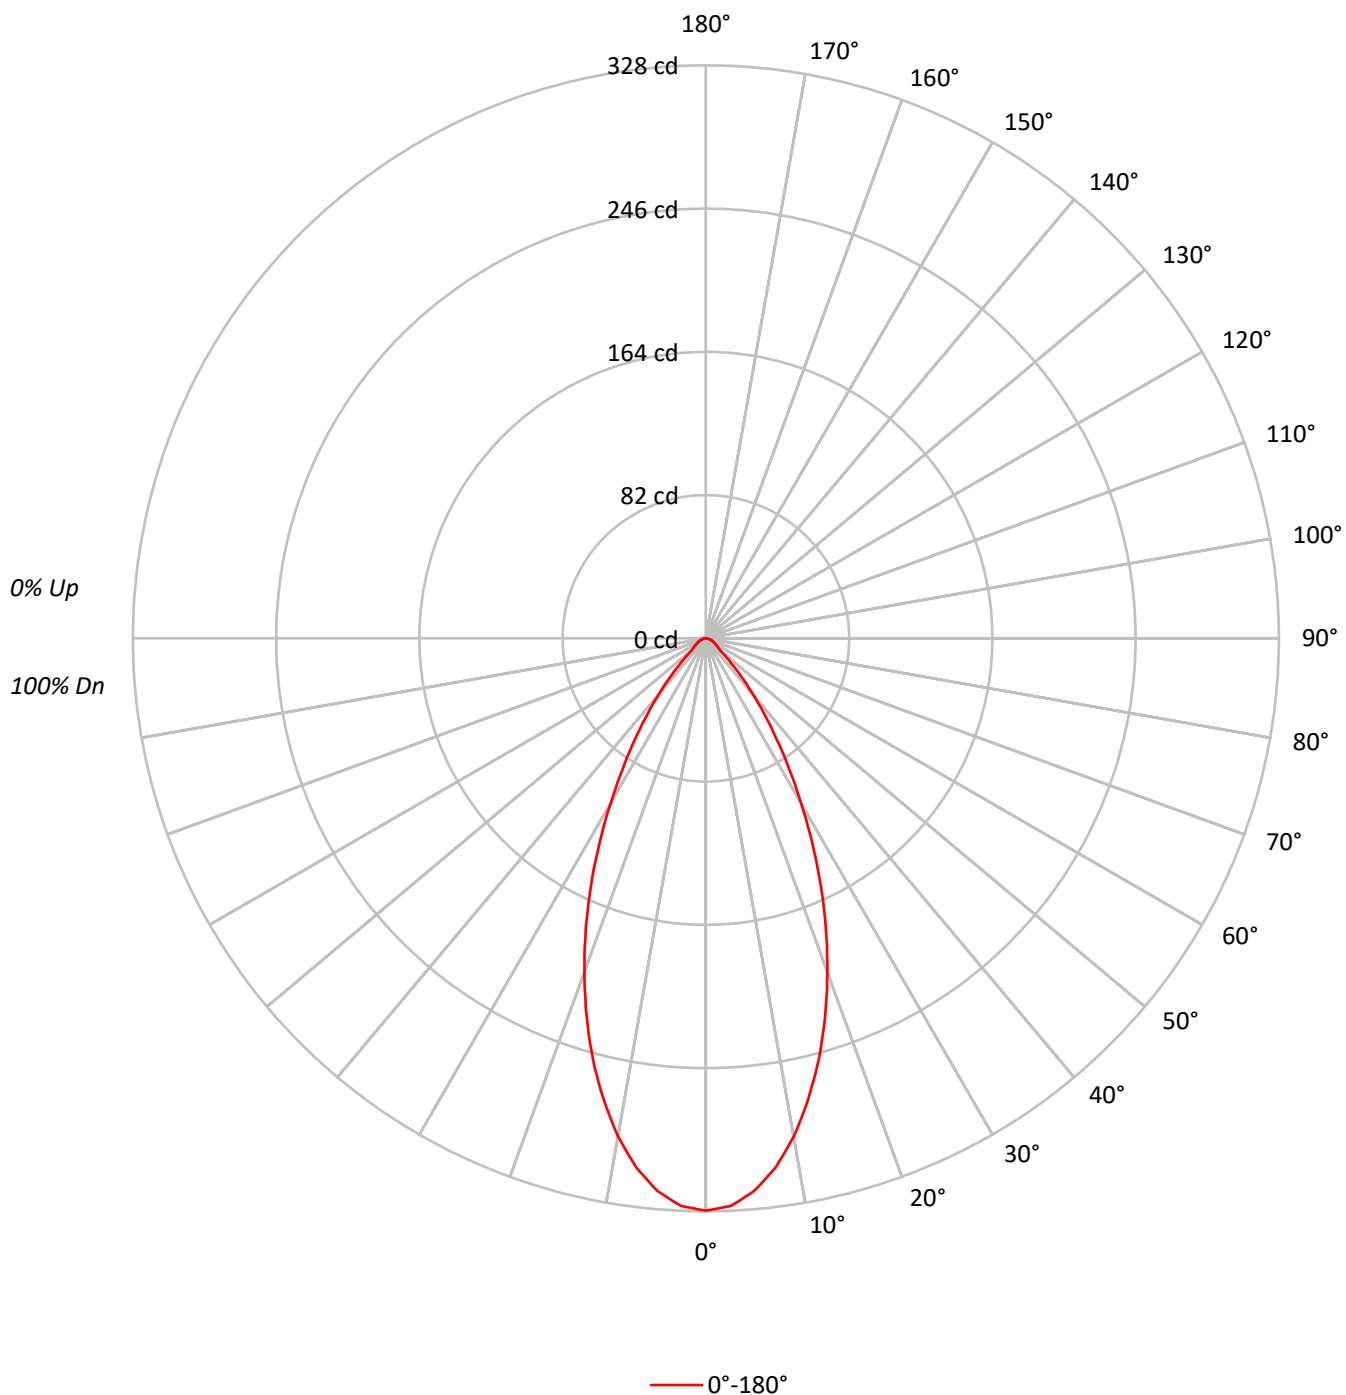

TEST NUMBER: P1248972

CATALOG NUMBER: P3AS09R509027DE010 E3DLP1GPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	113	110	107	105	111	108	106	103	104	102	100	100	99	97	97	95	94	93		
2	107	102	98	94	105	100	96	93	97	94	91	94	91	89	91	89	87	85		
3	101	95	89	85	99	93	88	85	91	87	83	88	85	82	86	83	81	79		
4	96	88	82	78	94	87	82	78	85	80	77	83	79	76	81	78	75	73		
5	91	83	76	72	90	82	76	72	80	75	71	78	74	70	77	73	70	68		
6	87	77	71	67	85	77	71	67	75	70	66	74	69	66	72	68	65	64		
7	82	73	67	62	81	72	66	62	71	66	62	70	65	61	68	64	61	60		
8	78	69	63	58	77	68	62	58	67	62	58	66	61	58	65	61	57	56		
9	75	65	59	55	74	64	59	55	63	58	55	63	58	54	62	57	54	53		
10	71	61	56	52	70	61	55	52	60	55	51	59	55	51	59	54	51	50		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	71836
5°	69910
10°	64461
15°	56686
20°	47441
25°	37599
30°	27599
35°	18979
40°	12051
45°	6729
50°	3650
55°	3058
60°	2631
65°	2439
70°	2116
75°	1949
80°	1642
85°	1761

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 6729 cd/sqm

TEST NUMBER: P1248972

CATALOG NUMBER: P3AS09R509027DE010 E3DLP1GPH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	29.4	11.9
10°-20°	69.2	28.0
20°-30°	70.7	28.6
30°-40°	44.9	18.2
40°-50°	17.8	7.2
50°-60°	7.2	2.9
60°-70°	4.6	1.9
70°-80°	2.4	1.0
80°-90°	0.7	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	169.3	68.6
0°-40°	214.2	86.7
0°-60°	239.2	96.9
0°-90°	246.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	246.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	328	
5°	318	29
15°	250	69
25°	155	71
35°	71	45
45°	22	18
55°	8	7
65°	5	5
75°	2	2
85°	1	1
90°	0	

TEST NUMBER: P1248972

CATALOG NUMBER: P3AS09R509027DE010 E3DLP1GPH

CANDELA DISTRIBUTION (FULL):

0°	
0°	327.6
2.5°	325.3
5°	317.6
7.5°	305.5
10°	289.5
12.5°	270.4
15°	249.7
17.5°	227.0
20°	203.3
22.5°	179.5
25°	155.4
27.5°	131.4
30°	109.0
32.5°	88.9
35°	70.9
37.5°	55.5
40°	42.1
42.5°	31.1
45°	21.7
47.5°	14.7
50°	10.7
52.5°	9.0
55°	8.0
57.5°	7.0
60°	6.0
62.5°	5.3
65°	4.7
67.5°	4.0
70°	3.3
72.5°	2.7
75°	2.3
77.5°	1.7
80°	1.3
82.5°	1.0
85°	0.7
87.5°	0.3
90°	0.0

(END OF REPORT)