

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1248983

Luminaire Tested: P3AS09R559027DE010 E3CD1MW

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1248983
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-36)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS09R559027DE010 E3CD1MW
Description: 3in Adjustable LED luminaire with, R55 optic, 2700K CCT AND, 90CRI , E3CD1MW TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 909.0 lumens
Efficiency: N/A
Efficacy: 81.9 lumens/watt
Spacing Criteria (0/90/45): 0.94 / 0.94 / 0.82
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 11.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1248983

CATALOG NUMBER: P3AS09R559027DE010 E3CD1MW

Luminous Intensity Polar Plot

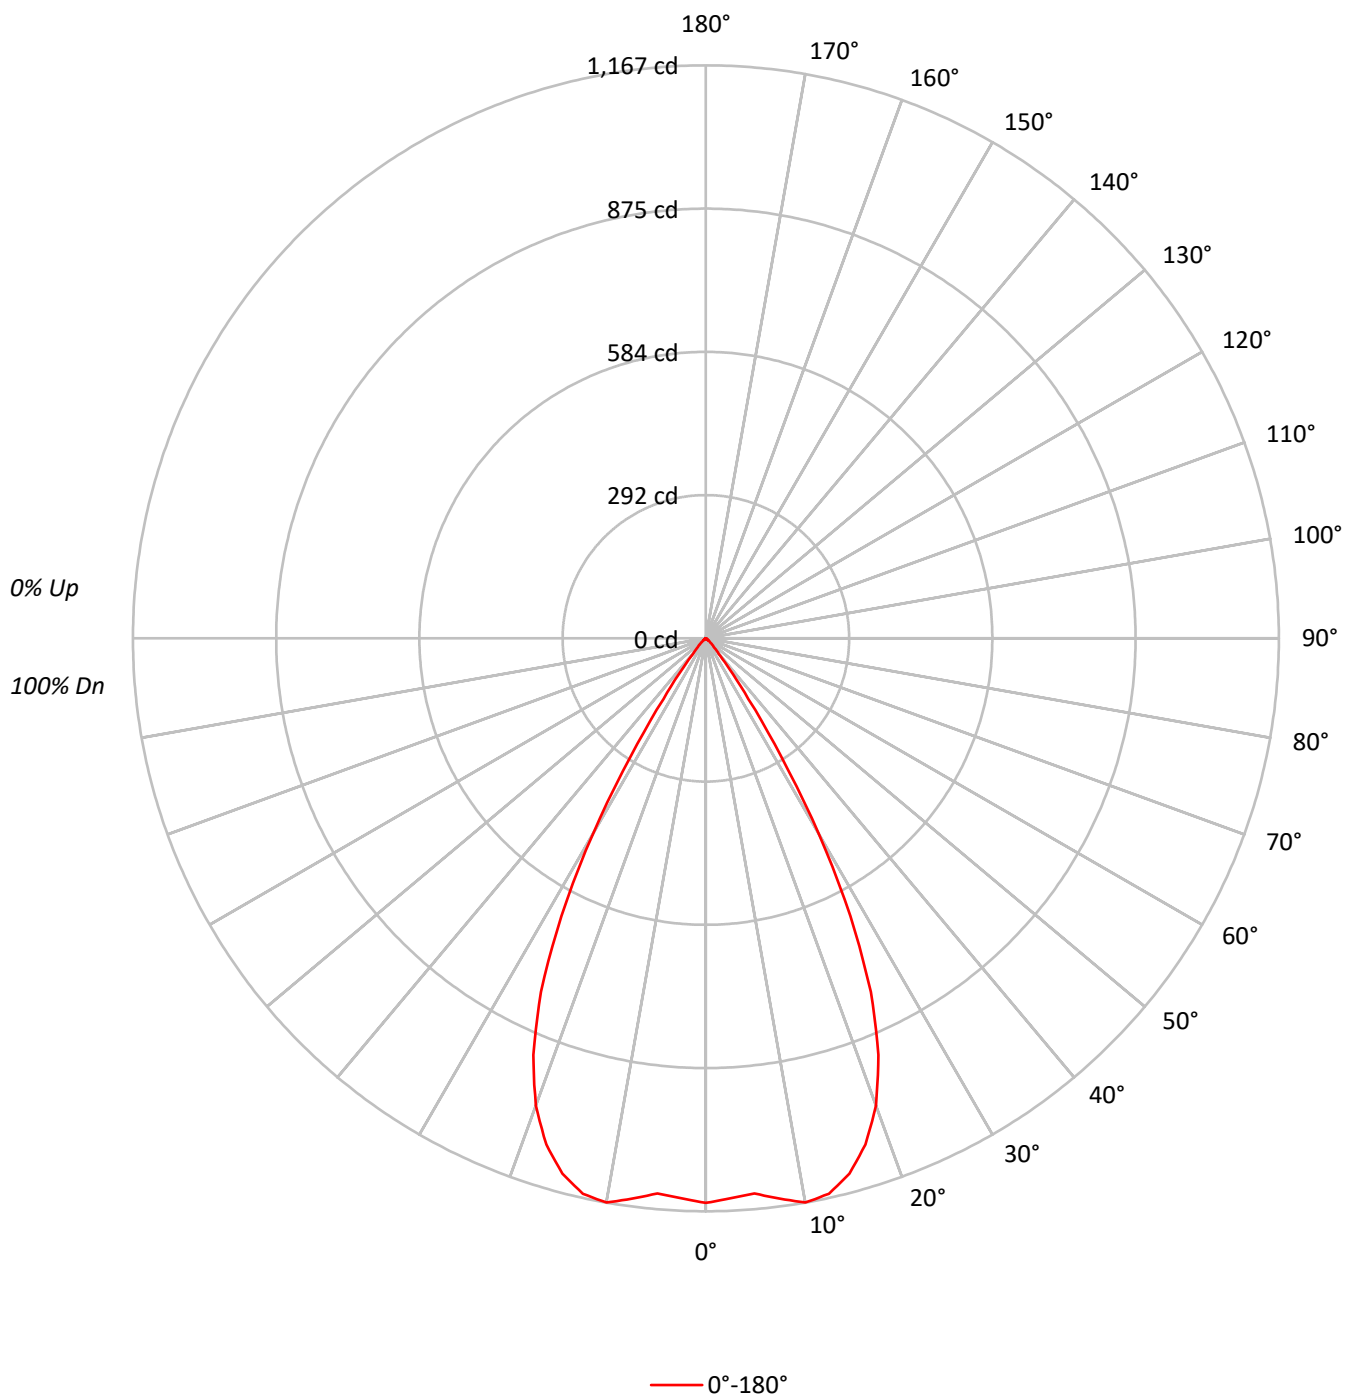

TEST NUMBER: P1248983

CATALOG NUMBER: P3AS09R559027DE010 E3CD1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10			0
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	114	111	109	107	112	109	107	105	105	104	102		101	100	99		98	97	96	94
2	109	104	101	98	107	103	99	96	100	97	94		97	94	92		94	92	90	89
3	104	98	94	90	102	97	93	89	94	91	88		92	89	86		90	87	85	84
4	99	92	87	84	98	91	87	83	89	85	82		87	84	81		85	83	80	79
5	95	87	82	78	93	86	81	78	85	80	77		83	79	76		82	78	76	74
6	91	83	77	73	89	82	77	73	80	76	72		79	75	72		78	74	72	70
7	87	78	73	69	85	78	72	69	76	72	68		75	71	68		74	70	68	66
8	83	74	69	65	82	74	68	65	73	68	65		72	67	64		71	67	64	63
9	79	71	65	61	78	70	65	61	69	64	61		68	64	61		68	64	61	60
10	76	67	62	58	75	67	62	58	66	61	58		65	61	58		65	61	58	57

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	252107
5°	249768
10°	259804
15°	256210
20°	236247
25°	192229
30°	116752
35°	40422
40°	11536
45°	5520
50°	2320
55°	1032
60°	1184
65°	1038
70°	898
75°	1186
80°	884
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 5520 cd/sqm

TEST NUMBER: P1248983

CATALOG NUMBER: P3AS09R559027DE010 E3CD1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	109.7	12.1
10°-20°	313.7	34.5
20°-30°	349.7	38.5
30°-40°	114.4	12.6
40°-50°	15.1	1.7
50°-60°	3.2	0.3
60°-70°	1.8	0.2
70°-80°	1.2	0.1
80°-90°	0.3	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	773.0	85.0
0°-40°	887.4	97.6
0°-60°	905.7	99.6
0°-90°	909.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	909.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1150	
5°	1135	110
15°	1129	314
25°	794	350
35°	151	114
45°	18	15
55°	3	3
65°	2	2
75°	1	1
85°	0	0
90°	0	

TEST NUMBER: P1248983

CATALOG NUMBER: P3AS09R559027DE010 E3CD1MW

CANDELA DISTRIBUTION (FULL):

0°	
0°	1149.7
2.5°	1141.5
5°	1134.7
7.5°	1151.1
10°	1166.8
12.5°	1158.6
15°	1128.6
17.5°	1080.7
20°	1012.4
22.5°	918.2
25°	794.5
27.5°	637.4
30°	461.1
32.5°	282.8
35°	151.0
37.5°	76.5
40°	40.3
42.5°	26.0
45°	17.8
47.5°	12.3
50°	6.8
52.5°	4.1
55°	2.7
57.5°	2.7
60°	2.7
62.5°	2.0
65°	2.0
67.5°	1.4
70°	1.4
72.5°	1.4
75°	1.4
77.5°	0.7
80°	0.7
82.5°	0.7
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)