

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1249207

Luminaire Tested: P3AS13R209027DE010 E3PH1MW

Issue Date: 1/29/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1249207  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2509-551-2)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/29/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS13R209027DE010 E3PH1MW  
Description: 3in Adjustable LED luminaire with, R20 optic, 2700K CCT AND, 90CRI , E3PH1MW TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 820.0 lumens  
Efficiency: N/A  
Efficacy: 56.2 lumens/watt  
Spacing Criteria (0/90/45): 0.32 / 0.32 / 0.32  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 14.6  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1249207  
CATALOG NUMBER: P3AS13R209027DE010 E3PH1MW

### Luminous Intensity Polar Plot

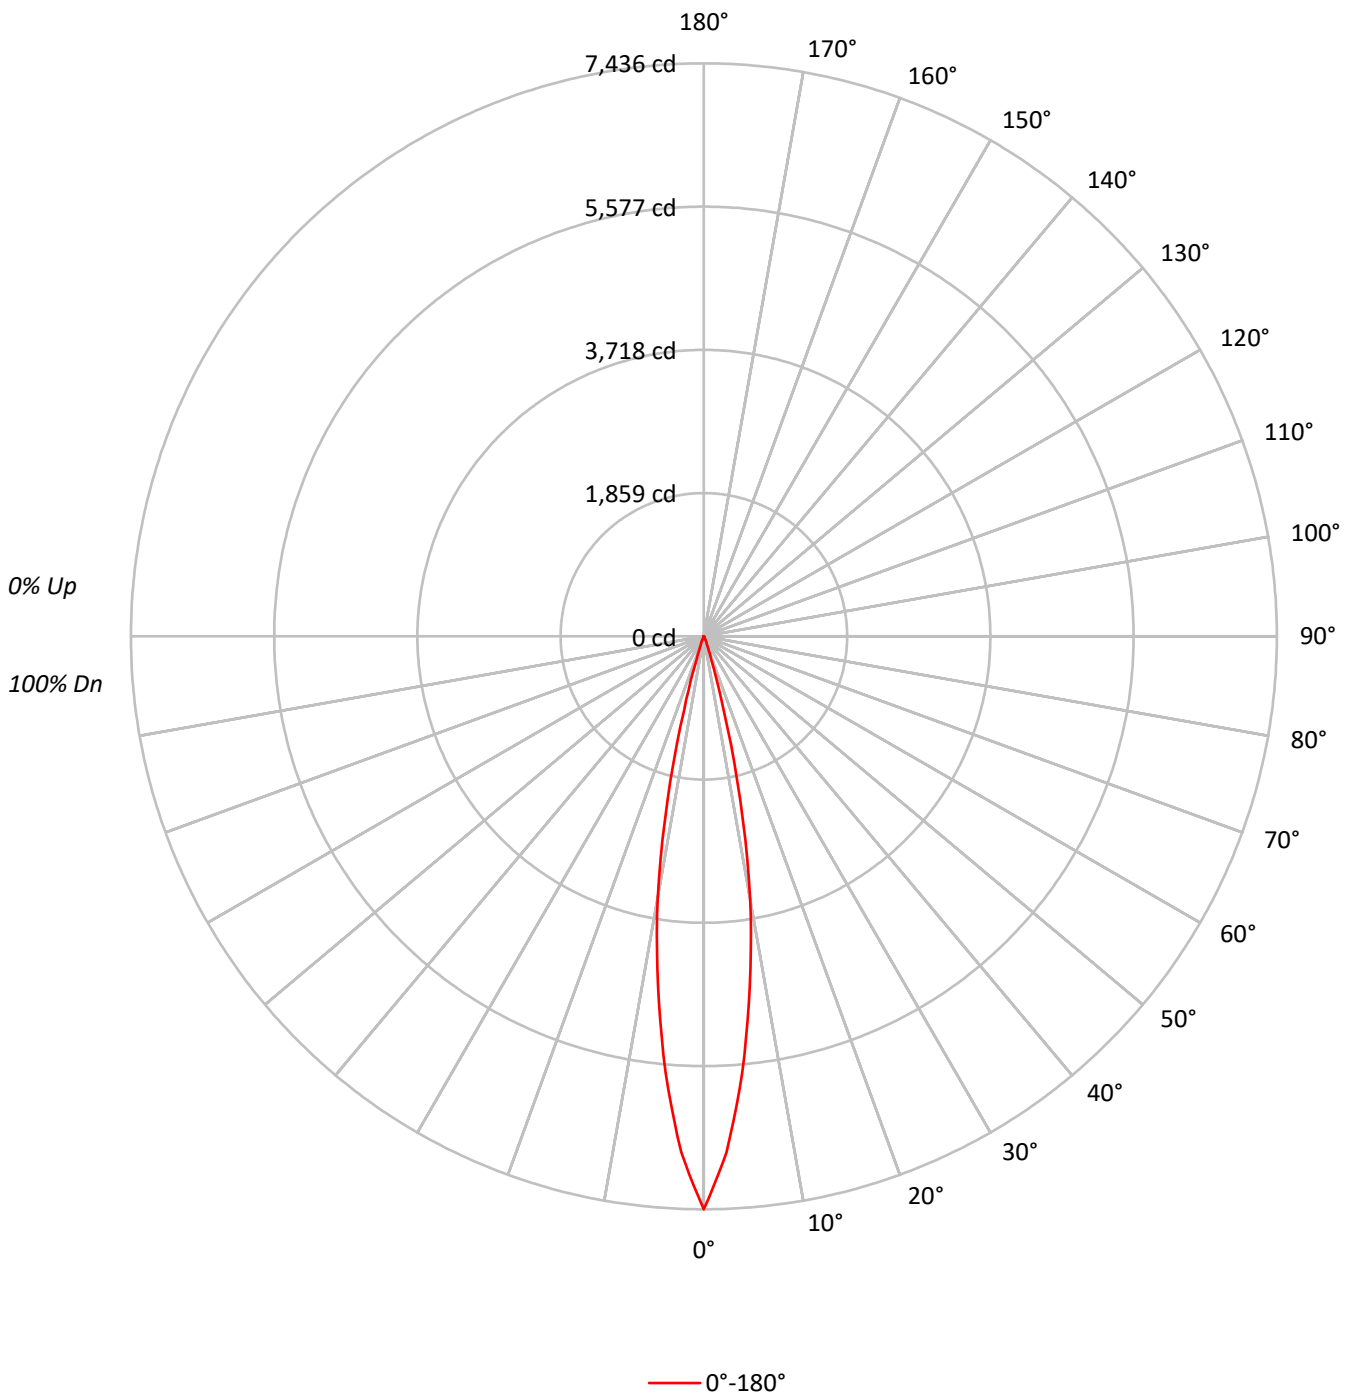



TEST NUMBER: P1249207

CATALOG NUMBER: P3AS13R209027DE010 E3PH1MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	102	102	102	100
1	116	114	112	111	113	112	110	109	108	107	106	104	104	103	101	100	100	100	100	100	98
2	113	110	107	105	111	108	106	104	105	104	102	102	101	100	100	99	98	98	98	98	97
3	110	107	104	101	109	105	103	101	103	101	99	101	99	98	99	97	96	96	96	96	95
4	108	104	101	98	107	103	100	98	101	98	97	99	97	95	97	96	94	94	94	94	93
5	106	101	98	96	105	100	97	95	99	96	94	97	95	94	96	94	93	93	93	93	92
6	104	99	96	93	103	98	95	93	97	94	93	96	94	92	95	93	91	91	91	91	91
7	102	97	94	92	101	96	93	91	95	93	91	95	92	90	94	92	90	90	90	90	89
8	100	95	92	90	99	95	92	90	94	91	89	93	91	89	92	90	89	89	89	89	88
9	99	94	90	88	98	93	90	88	92	90	88	92	89	88	91	89	88	88	88	88	87
10	97	92	89	87	96	92	89	87	91	88	87	91	88	87	90	88	86	86	86	86	86

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	1630593
5°	1252407
10°	771573
15°	224542
20°	29963
25°	8880
30°	2659
35°	348
40°	372
45°	0
50°	0
55°	0
60°	0
65°	0
70°	0
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 0 cd/sqm



TEST NUMBER: P1249207  
 CATALOG NUMBER: P3AS13R209027DE010 E3PH1MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	473.8	57.8
10°-20°	323.2	39.4
20°-30°	20.8	2.5
30°-40°	2.0	0.2
40°-50°	0.1	0.0
50°-60°	0.0	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	817.8	99.7
0°-40°	819.9	100.0
0°-60°	820.0	100.0
0°-90°	820.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	820.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	7436	
5°	5690	474
15°	989	323
25°	37	21
35°	1	2
45°	0	0
55°	0	0
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P1249207  
CATALOG NUMBER: P3AS13R209027DE010 E3PH1MW

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	7436.1
2.5°	6705.0
5°	5689.7
7.5°	4564.3
10°	3465.2
12.5°	2173.4
15°	989.1
17.5°	313.1
20°	128.4
22.5°	68.1
25°	36.7
27.5°	18.3
30°	10.5
32.5°	5.2
35°	1.3
37.5°	1.3
40°	1.3
42.5°	0.0
45°	0.0
47.5°	0.0
50°	0.0
52.5°	0.0
55°	0.0
57.5°	0.0
60°	0.0
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)