

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1249244

Luminaire Tested: P3AS13R309027DE010 E3CB1MW

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1249244  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-16)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS13R309027DE010 E3CB1MW  
Description: 3in Adjustable LED luminaire with, R30 optic, 2700K CCT AND, 90CRI , E3CB1MW TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1155.0 lumens  
Efficiency: N/A  
Efficacy: 79.1 lumens/watt  
Spacing Criteria (0/90/45): 0.53 / 0.53 / 0.47  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 14.6  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1249244  
CATALOG NUMBER: P3AS13R309027DE010 E3CB1MW

### Luminous Intensity Polar Plot

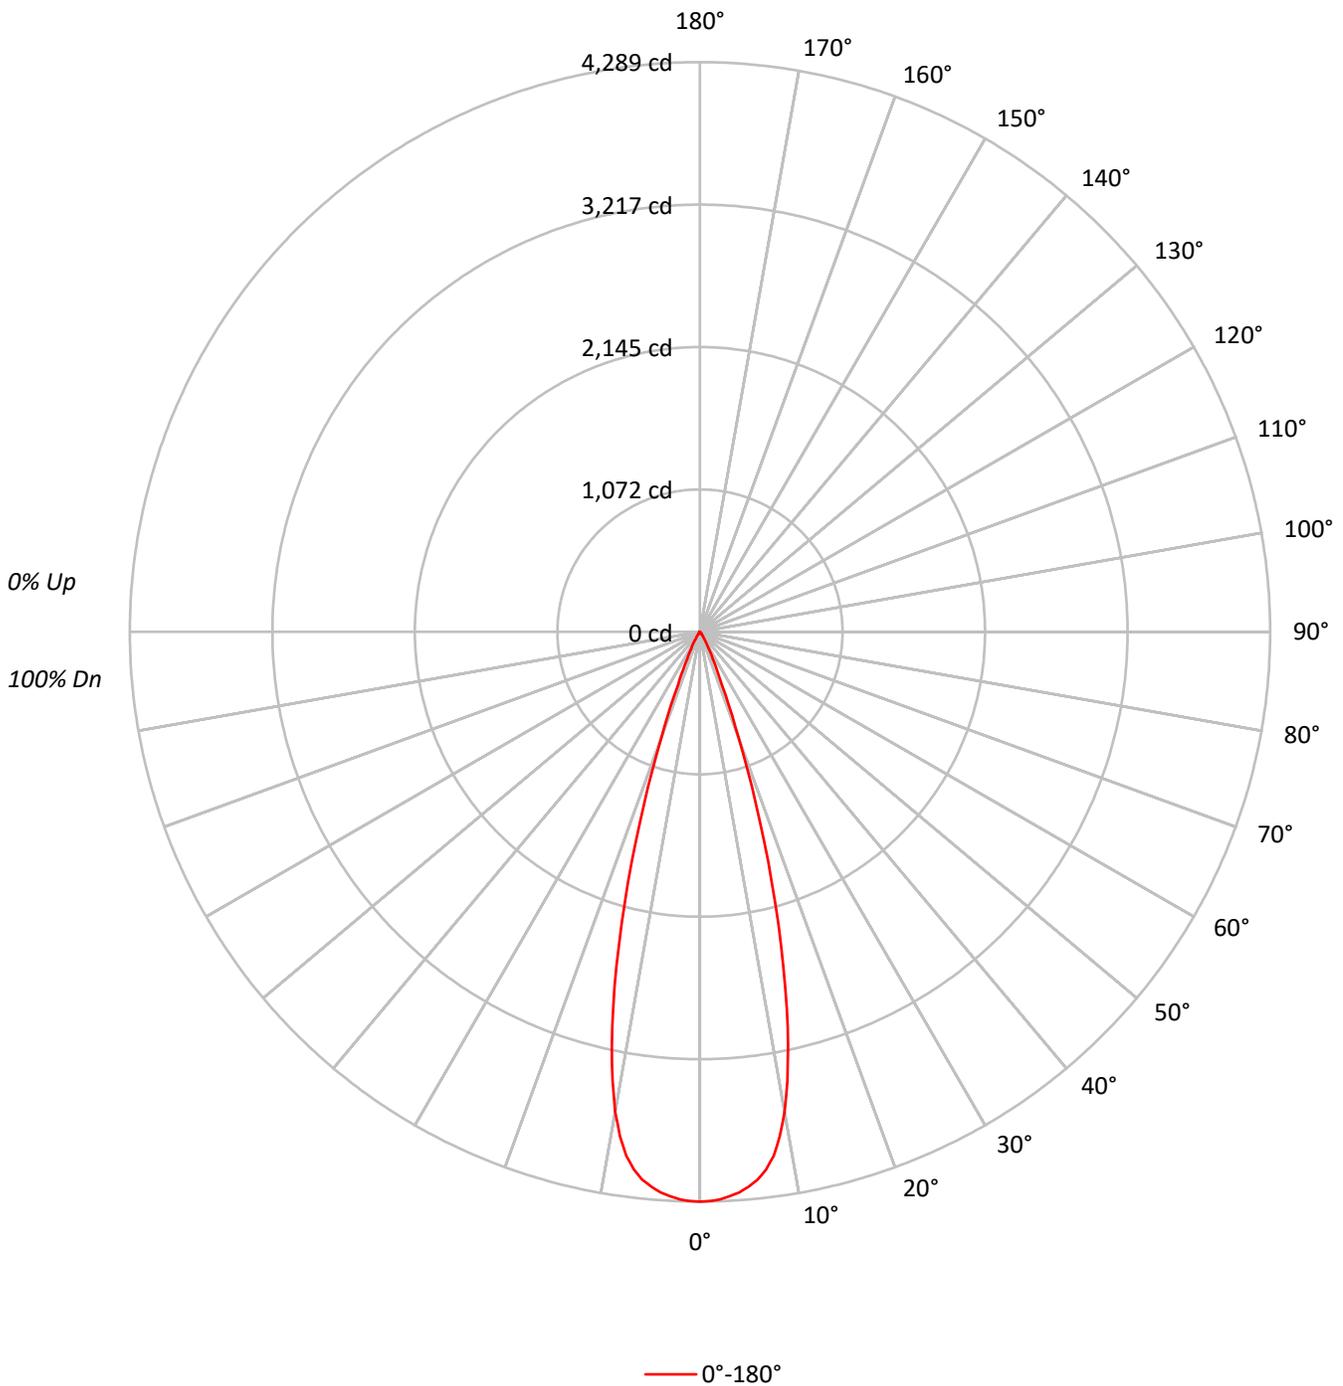





TEST NUMBER: P1249244  
 CATALOG NUMBER: P3AS13R309027DE010 E3CB1MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	385.4	33.4
10°-20°	600.6	52.0
20°-30°	139.5	12.1
30°-40°	21.6	1.9
40°-50°	3.7	0.3
50°-60°	1.7	0.1
60°-70°	1.4	0.1
70°-80°	1.0	0.1
80°-90°	0.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1125.4	97.4
0°-40°	1147.0	99.3
0°-60°	1152.4	99.8
0°-90°	1155.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1155.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	4289	
5°	4192	385
15°	2280	601
25°	240	139
35°	26	22
45°	4	4
55°	2	2
65°	2	1
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P1249244  
CATALOG NUMBER: P3AS13R309027DE010 E3CB1MW

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	4289.3
1°	4286.6
2°	4274.8
3°	4254.8
4°	4229.4
5°	4192.2
6°	4146.0
7°	4077.0
8°	3982.7
9°	3843.9
10°	3668.8
11°	3442.9
12°	3187.9
13°	2904.9
14°	2593.7
15°	2279.8
17.5°	1491.5
20°	841.9
22.5°	430.0
25°	240.4
27.5°	147.9
30°	90.7
32.5°	49.0
35°	26.3
37.5°	17.2
40°	10.9
42.5°	6.4
45°	3.6
47.5°	2.7
50°	2.7
52.5°	1.8
55°	1.8
57.5°	1.8
60°	1.8
62.5°	1.8
65°	1.8
67.5°	0.9
70°	0.9
72.5°	0.9
75°	0.9
77.5°	0.9
80°	0.9
82.5°	0.0
85°	0.0
87.5°	0.0



TEST NUMBER: P1249244  
CATALOG NUMBER: P3AS13R309027DE010 E3CB1MW

CANDELA DISTRIBUTION (continued):

0°  
90° | 0.0

(END OF REPORT)