

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1249453

Luminaire Tested: P3AS13R659027DE010 E3D1WMH

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1249453
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-16)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS13R659027DE010 E3D1WMH
Description: 3in Adjustable LED luminaire with, R65 optic, 2700K CCT AND, 90CRI , E3D1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1081.9 lumens
Efficiency: N/A
Efficacy: 74.1 lumens/watt
Spacing Criteria (0/90/45): 0.92 / 0.92 / 0.88
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 14.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1249453

CATALOG NUMBER: P3AS13R659027DE010 E3D1WMH

Luminous Intensity Polar Plot

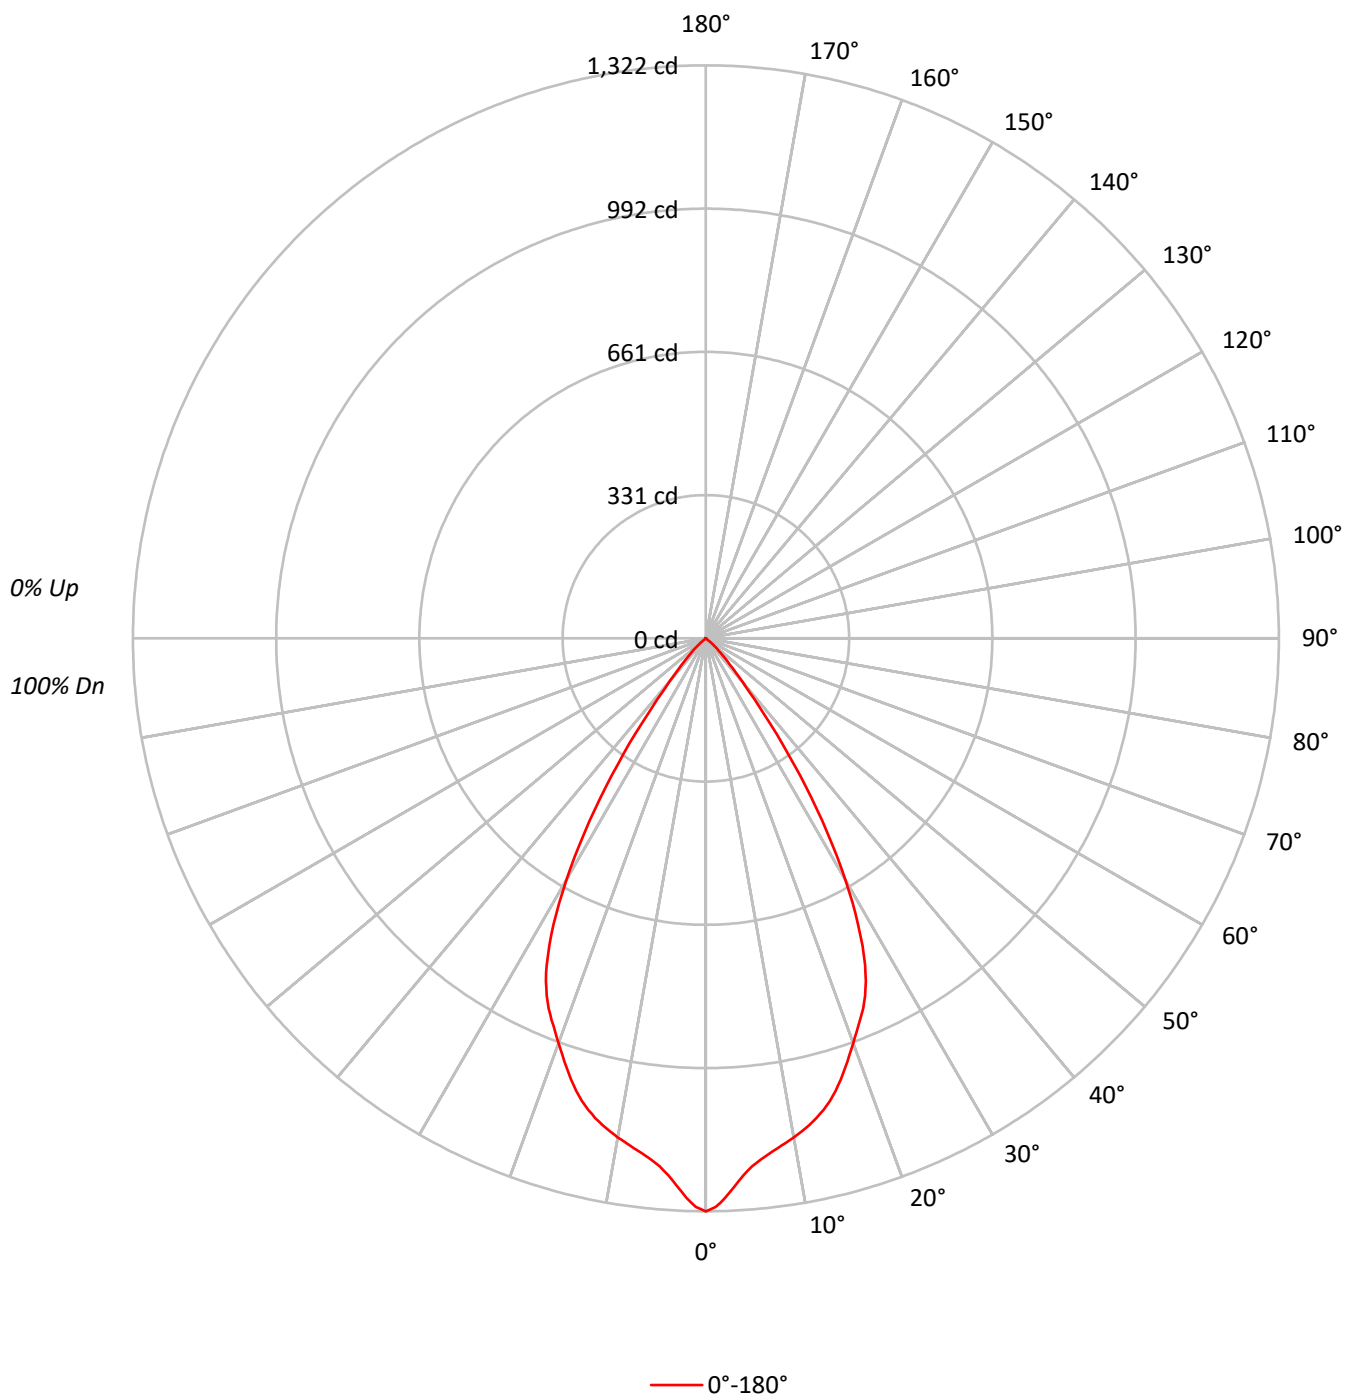

TEST NUMBER: P1249453

CATALOG NUMBER: P3AS13R659027DE010 E3D1WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	111	109	106	111	109	107	105	105	103	102		101	100	99		98
2	108	104	100	96	106	102	98	95	99	96	93		96	93	91		93
3	103	97	92	88	101	95	91	88	93	89	86		90	87	85		88
4	98	91	85	81	96	90	85	81	87	83	80		85	82	79		84
5	93	85	79	75	92	84	79	75	82	78	74		81	77	74		79
6	89	80	74	70	87	79	74	70	78	73	69		76	72	69		75
7	84	75	70	65	83	75	69	65	73	69	65		72	68	65		71
8	80	71	65	61	79	71	65	61	69	64	61		68	64	61		68
9	77	67	61	58	76	67	61	57	66	61	57		65	60	57		64
10	73	64	58	54	72	63	58	54	62	57	54		62	57	54		61

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	289933
5°	269205
10°	260338
15°	250898
20°	231954
25°	211319
30°	163291
35°	94656
40°	37556
45°	16002
50°	3787
55°	497
60°	395
65°	208
70°	256
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 16002 cd/sqm

TEST NUMBER: P1249453

CATALOG NUMBER: P3AS13R659027DE010 E3D1WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	115.3	10.7
10°-20°	307.9	28.5
20°-30°	389.7	36.0
30°-40°	221.9	20.5
40°-50°	44.1	4.1
50°-60°	2.3	0.2
60°-70°	0.6	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	813.0	75.1
0°-40°	1035.0	95.7
0°-60°	1081.3	99.9
0°-90°	1081.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1081.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1322	
5°	1223	115
15°	1105	308
25°	873	390
35°	354	222
45°	52	44
55°	1	2
65°	0	1
75°	0	0
85°	0	0
90°	0	

TEST NUMBER: P1249453

CATALOG NUMBER: P3AS13R659027DE010 E3D1WMH

CANDELA DISTRIBUTION (FULL):

0°	
0°	1322.2
1°	1312.4
2°	1291.1
3°	1266.1
4°	1241.7
5°	1223.0
6°	1209.2
7°	1198.1
8°	1188.3
9°	1178.5
10°	1169.2
11°	1159.0
12°	1148.3
13°	1135.4
14°	1121.6
15°	1105.2
16°	1085.6
17°	1064.2
18°	1041.1
19°	1016.7
20°	994.0
21°	970.8
22°	949.9
23°	928.2
24°	902.8
25°	873.4
26°	838.3
27°	796.1
28°	748.5
29°	697.8
30°	644.9
31°	586.6
32°	528.8
32.5°	499.0
33°	470.1
34°	411.4
35°	353.6
36°	300.2
37°	247.3
37.5°	220.1
38°	198.3
39°	160.5
40°	131.2
42.5°	80.9
45°	51.6

TEST NUMBER: P1249453

CATALOG NUMBER: P3AS13R659027DE010 E3D1WMH

CANDELA DISTRIBUTION (continued):

	0°
47.5°	30.2
50°	11.1
52.5°	2.2
55°	1.3
57.5°	0.9
60°	0.9
62.5°	0.9
65°	0.4
67.5°	0.4
70°	0.4
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)