

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1249573

Luminaire Tested: P3AS17R209027DE010 E3DL1LI

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1249573
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-7)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R209027DE010 E3DL1LI
Description: 3in Adjustable LED luminaire with, R20 optic, 2700K CCT AND, 90CRI , E3DL1LI TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1244.0 lumens
Efficiency: N/A
Efficacy: 58.7 lumens/watt
Spacing Criteria (0/90/45): 0.44 / 0.44 / 0.46
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 21.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1249573

CATALOG NUMBER: P3AS17R209027DE010 E3DL1LI

Luminous Intensity Polar Plot

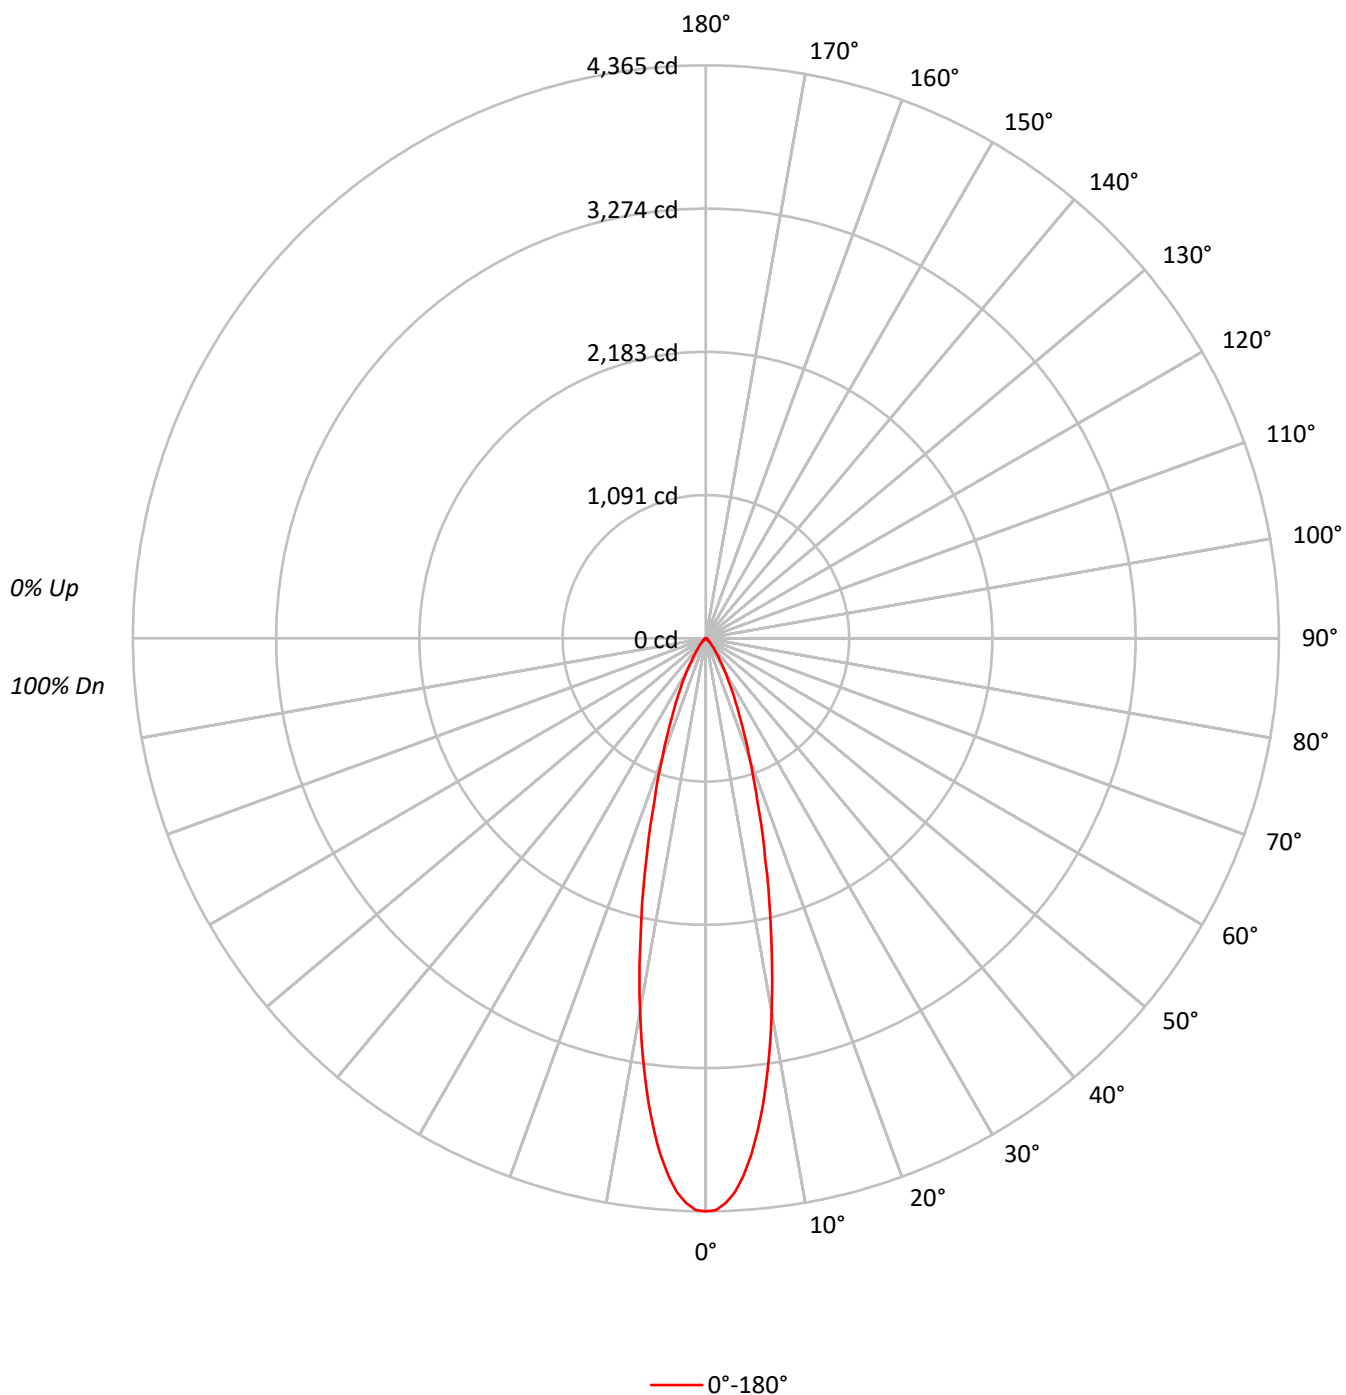

TEST NUMBER: P1249573

CATALOG NUMBER: P3AS17R209027DE010 E3DL1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	112	110	108	112	110	108	106	106	104	103		102	101	100		99
2	110	106	102	100	108	104	101	98	101	98	96		98	96	94		95
3	106	100	96	93	104	99	95	92	97	93	91		94	92	89		92
4	102	96	91	88	100	95	90	87	92	89	86		91	88	85		89
5	98	91	87	83	97	90	86	83	89	85	82		87	84	81		86
6	95	87	83	79	93	87	82	79	85	81	78		84	81	78		83
7	91	84	79	76	90	83	79	76	82	78	75		81	78	75		80
8	88	81	76	73	87	80	76	73	79	75	72		78	75	72		78
9	85	78	73	70	85	77	73	70	77	73	70		76	72	69		75
10	83	75	71	68	82	75	70	67	74	70	67		73	70	67		73

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	957116
5°	870040
10°	643007
15°	397778
20°	227146
25°	129685
30°	72720
35°	39565
40°	21669
45°	11939
50°	6959
55°	5046
60°	4736
65°	4358
70°	3847
75°	4067
80°	3031
85°	3019

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 11939 cd/sqm

TEST NUMBER: P1249573

CATALOG NUMBER: P3AS17R209027DE010 E3DL1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	342.3	27.5
10°-20°	488.6	39.3
20°-30°	255.0	20.5
30°-40°	98.6	7.9
40°-50°	32.0	2.6
50°-60°	12.6	1.0
60°-70°	8.3	0.7
70°-80°	4.9	0.4
80°-90°	1.6	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1085.9	87.3
0°-40°	1184.5	95.2
0°-60°	1229.1	98.8
0°-90°	1244.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1244.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4365	
5°	3953	342
15°	1752	489
25°	536	255
35°	148	99
45°	38	32
55°	13	13
65°	8	8
75°	5	5
85°	1	2
90°	0	

TEST NUMBER: P1249573

CATALOG NUMBER: P3AS17R209027DE010 E3DL1LI

CANDELA DISTRIBUTION (FULL):

0°	
0°	4364.8
1°	4356.4
2°	4304.7
3°	4225.4
4°	4102.8
5°	3952.6
6°	3774.7
7°	3577.6
8°	3349.3
9°	3127.0
10°	2887.8
12.5°	2295.4
15°	1752.2
17.5°	1311.1
20°	973.4
22.5°	721.1
25°	536.0
27.5°	395.4
30°	287.2
32.5°	207.9
35°	147.8
37.5°	107.0
40°	75.7
42.5°	54.1
45°	38.5
47.5°	27.6
50°	20.4
52.5°	15.6
55°	13.2
57.5°	12.0
60°	10.8
62.5°	9.6
65°	8.4
67.5°	7.2
70°	6.0
72.5°	6.0
75°	4.8
77.5°	3.6
80°	2.4
82.5°	2.4
85°	1.2
87.5°	1.2
90°	0.0

(END OF REPORT)