

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1249597

Luminaire Tested: P3AS17R259027DE010 E3DL1GPH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1249597
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-11)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R259027DE010 E3DL1GPH
Description: 3in Adjustable LED luminaire with, R25 optic, 2700K CCT AND, 90CRI , E3DL1GPH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 617.0 lumens
Efficiency: N/A
Efficacy: 29.1 lumens/watt
Spacing Criteria (0/90/45): 0.49 / 0.49 / 0.51
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 21.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1249597

CATALOG NUMBER: P3AS17R259027DE010 E3DL1GPH

Luminous Intensity Polar Plot

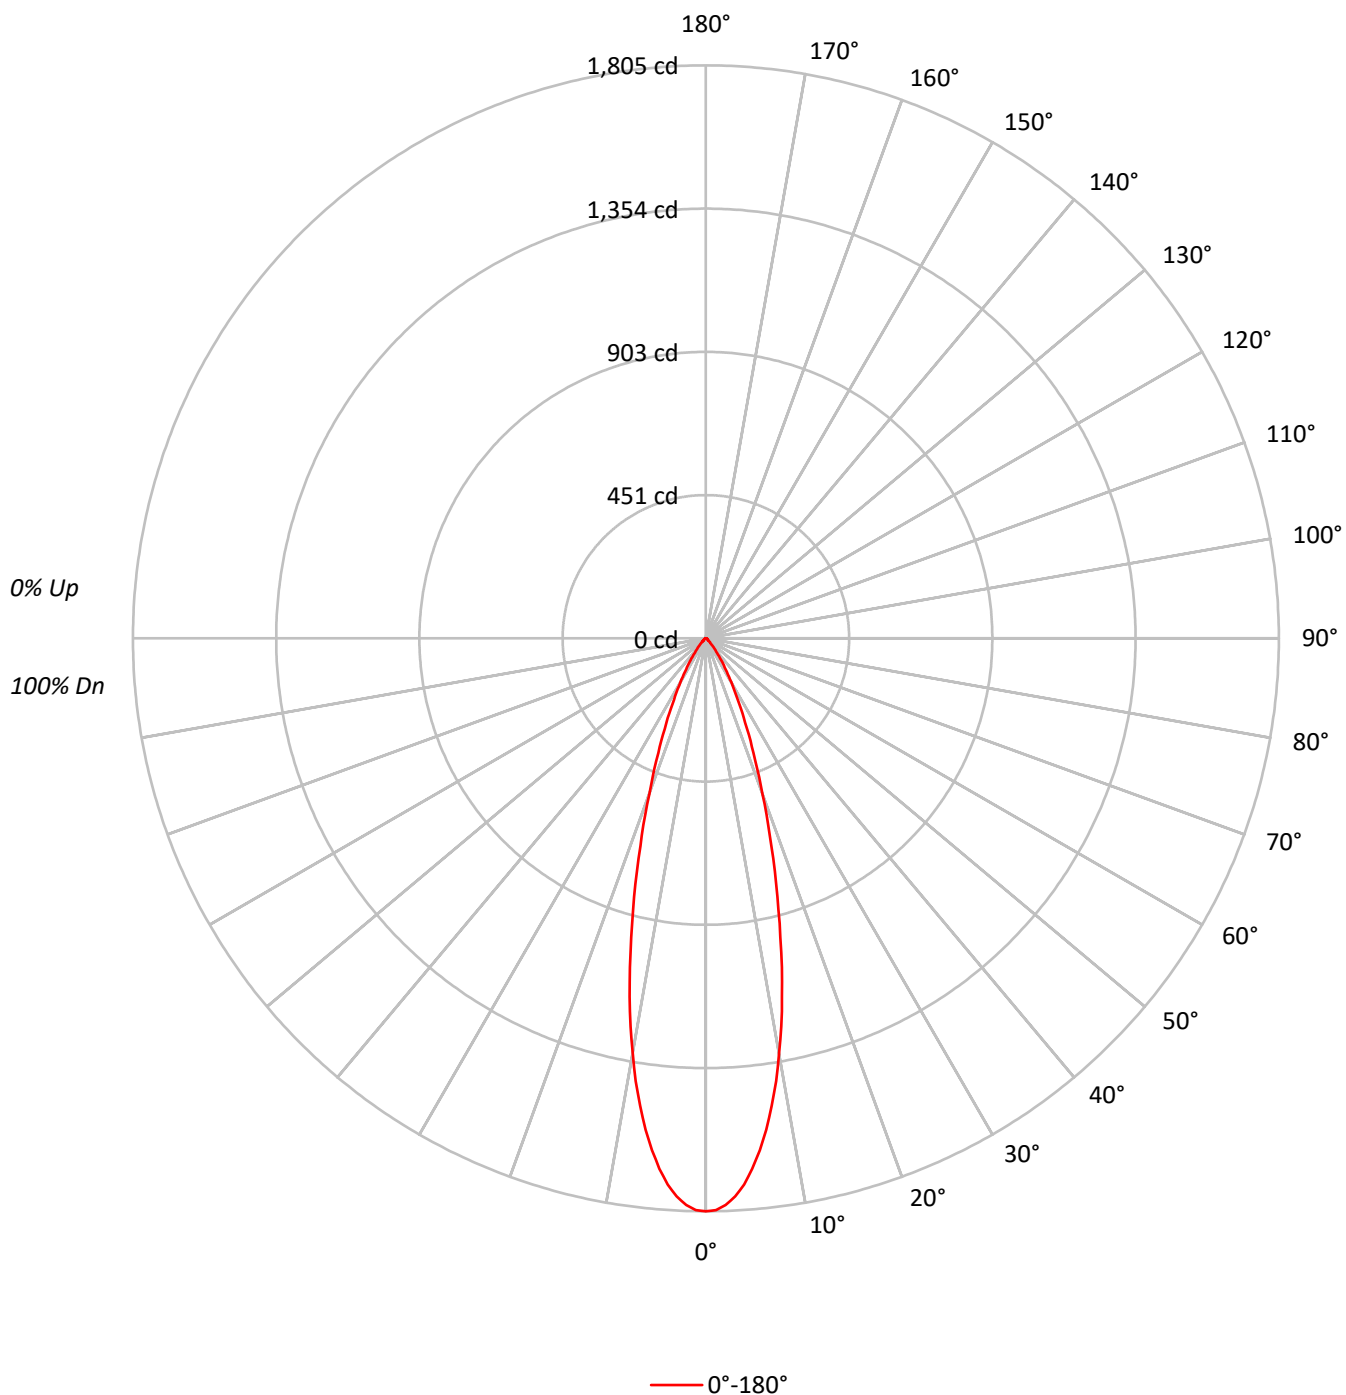

TEST NUMBER: P1249597

CATALOG NUMBER: P3AS17R259027DE010 E3DL1GPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	112	110	108	112	110	108	106	106	104	103		102	101	100		99
2	110	105	102	99	107	104	101	98	101	98	96		98	96	94		95
3	105	100	96	92	103	98	95	91	96	93	90		94	91	89		91
4	101	95	90	87	99	94	89	86	92	88	85		90	87	84		88
5	97	90	85	82	96	89	85	81	88	84	81		86	83	80		85
6	94	86	81	78	92	86	81	78	84	80	77		83	79	77		82
7	90	83	78	74	89	82	77	74	81	77	74		80	76	73		79
8	87	79	74	71	86	79	74	71	78	74	71		77	73	70		76
9	84	76	71	68	83	76	71	68	75	71	68		74	70	68		73
10	81	73	69	65	80	73	68	65	72	68	65		72	68	65		71

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	395780
5°	369248
10°	295808
15°	200796
20°	121507
25°	71036
30°	40462
35°	22245
40°	11822
45°	6202
50°	3616
55°	2714
60°	2324
65°	2439
70°	2244
75°	2033
80°	1515
85°	1510

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 6202 cd/sqm

TEST NUMBER: P1249597

CATALOG NUMBER: P3AS17R259027DE010 E3DL1GPH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	148.9	24.1
10°-20°	243.2	39.4
20°-30°	138.9	22.5
30°-40°	54.8	8.9
40°-50°	16.8	2.7
50°-60°	6.7	1.1
60°-70°	4.4	0.7
70°-80°	2.5	0.4
80°-90°	0.8	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	531.0	86.1
0°-40°	585.8	94.9
0°-60°	609.3	98.7
0°-90°	617.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	617.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1805	
5°	1678	149
15°	884	243
25°	294	139
35°	83	55
45°	20	17
55°	7	7
65°	5	4
75°	2	2
85°	1	1
90°	0	

TEST NUMBER: P1249597

CATALOG NUMBER: P3AS17R259027DE010 E3DL1GPH

CANDELA DISTRIBUTION (FULL):

0°	
0°	1804.9
1°	1801.4
2°	1786.6
3°	1760.7
4°	1724.7
5°	1677.5
6°	1622.1
7°	1559.6
8°	1487.1
9°	1412.8
10°	1328.5
11°	1245.3
12°	1153.9
13°	1063.7
14°	971.1
15°	884.5
17.5°	685.8
20°	520.7
22.5°	390.9
25°	293.6
27.5°	217.6
30°	159.8
32.5°	115.6
35°	83.1
37.5°	59.0
40°	41.3
42.5°	28.3
45°	20.0
47.5°	14.2
50°	10.6
52.5°	8.3
55°	7.1
57.5°	6.5
60°	5.3
62.5°	4.7
65°	4.7
67.5°	4.1
70°	3.5
72.5°	2.9
75°	2.4
77.5°	1.8
80°	1.2
82.5°	1.2
85°	0.6
87.5°	0.6



TEST NUMBER: P1249597

CATALOG NUMBER: P3AS17R259027DE010 E3DL1GPH

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)