

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1249645

Luminaire Tested: P3AS17R309027DE010 E3DLP1WH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1249645
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-15)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R309027DE010 E3DLP1WH
Description: 3in Adjustable LED luminaire with, R30 optic, 2700K CCT AND, 90CRI , E3DLP1WH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1273.0 lumens
Efficiency: N/A
Efficacy: 60.0 lumens/watt
Spacing Criteria (0/90/45): 0.54 / 0.54 / 0.54
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 21.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1249645

CATALOG NUMBER: P3AS17R309027DE010 E3DLP1WH

Luminous Intensity Polar Plot

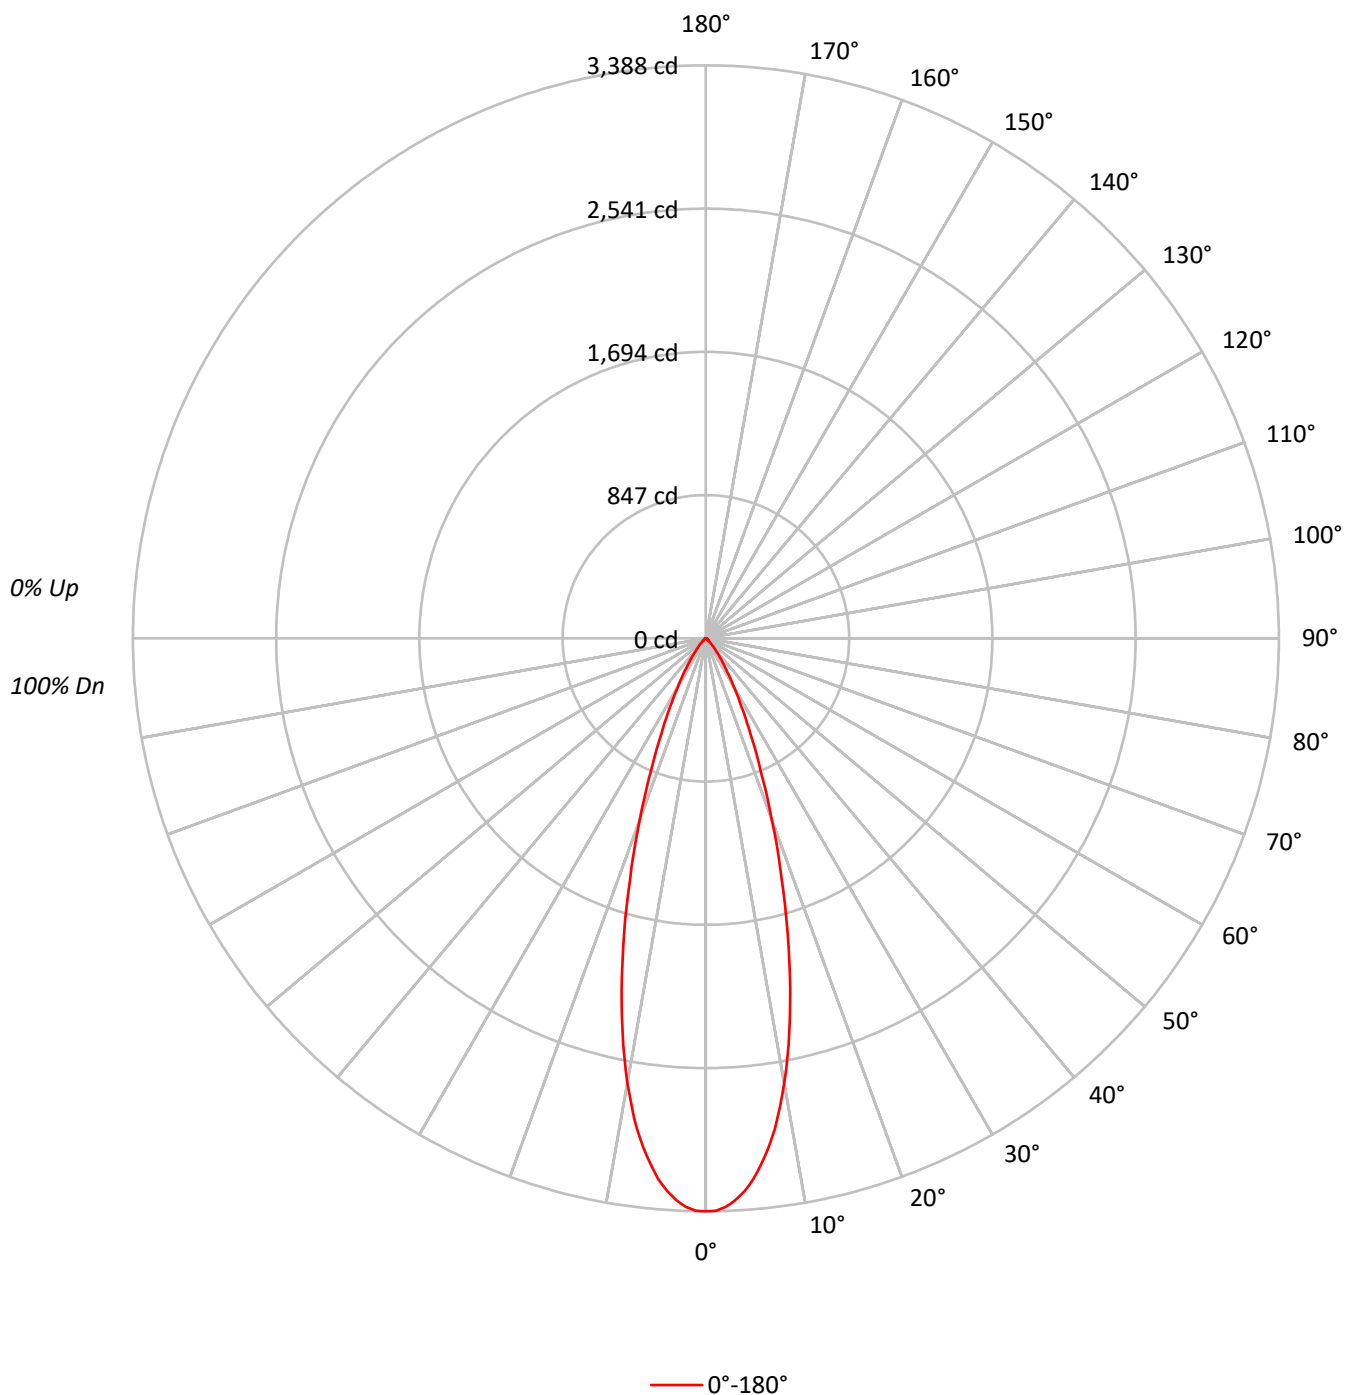

TEST NUMBER: P1249645

CATALOG NUMBER: P3AS17R309027DE010 E3DLP1WH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	112	110	108	112	110	108	106	106	104	103		102	101	100		99
2	110	105	102	99	107	104	101	98	101	98	96		98	96	94		95
3	105	100	96	92	103	98	95	91	96	93	90		94	91	89		91
4	101	95	90	87	99	94	89	86	92	88	85		90	87	84		88
5	97	90	85	82	96	89	85	81	88	84	81		86	83	80		85
6	94	86	81	78	92	85	81	77	84	80	77		83	79	76		81
7	90	82	77	74	89	82	77	74	81	76	73		80	76	73		79
8	87	79	74	71	86	79	74	71	78	73	70		77	73	70		76
9	84	76	71	68	83	75	71	68	75	70	67		74	70	67		73
10	81	73	68	65	80	73	68	65	72	68	65		71	67	65		71

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	742835
5°	707020
10°	594712
15°	428879
20°	266023
25°	151291
30°	84038
35°	45722
40°	24102
45°	13056
50°	6959
55°	4588
60°	4210
65°	4358
70°	3847
75°	3050
80°	3031
85°	3019

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 13056 cd/sqm

TEST NUMBER: P1249645

CATALOG NUMBER: P3AS17R309027DE010 E3DLP1WH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	289.2	22.7
10°-20°	514.1	40.4
20°-30°	297.1	23.3
30°-40°	112.8	8.9
40°-50°	34.6	2.7
50°-60°	11.6	0.9
60°-70°	7.9	0.6
70°-80°	4.3	0.3
80°-90°	1.3	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1100.5	86.5
0°-40°	1213.3	95.3
0°-60°	1259.5	98.9
0°-90°	1273.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1273.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3388	
5°	3212	289
15°	1889	514
25°	625	297
35°	171	113
45°	42	35
55°	12	12
65°	8	8
75°	4	4
85°	1	1
90°	0	

TEST NUMBER: P1249645

CATALOG NUMBER: P3AS17R309027DE010 E3DLP1WH

CANDELA DISTRIBUTION (FULL):

0°	
0°	3387.6
1°	3385.2
2°	3364.8
3°	3326.3
4°	3278.2
5°	3212.0
6°	3127.8
7°	3034.0
8°	2929.4
9°	2804.4
10°	2670.9
11°	2526.6
12°	2373.8
13°	2213.9
14°	2051.6
15°	1889.2
17.5°	1490.0
20°	1140.0
22.5°	845.4
25°	625.3
27.5°	454.6
30°	331.9
32.5°	239.3
35°	170.8
37.5°	119.1
40°	84.2
42.5°	58.9
45°	42.1
47.5°	28.9
50°	20.4
52.5°	14.4
55°	12.0
57.5°	10.8
60°	9.6
62.5°	8.4
65°	8.4
67.5°	7.2
70°	6.0
72.5°	4.8
75°	3.6
77.5°	3.6
80°	2.4
82.5°	2.4
85°	1.2
87.5°	0.0



TEST NUMBER: P1249645

CATALOG NUMBER: P3AS17R309027DE010 E3DLP1WH

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)