

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1249651

Luminaire Tested: P3AS17R359027DE010 E3CB1MMS

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1249651
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-20)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R359027DE010 E3CB1MMS
Description: 3in Adjustable LED luminaire with, R35 optic, 2700K CCT AND, 90CRI , E3CB1MMS TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1527.0 lumens
Efficiency: N/A
Efficacy: 72.0 lumens/watt
Spacing Criteria (0/90/45): 0.58 / 0.58 / 0.52
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 21.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1249651
CATALOG NUMBER: P3AS17R359027DE010 E3CB1MMS

Luminous Intensity Polar Plot

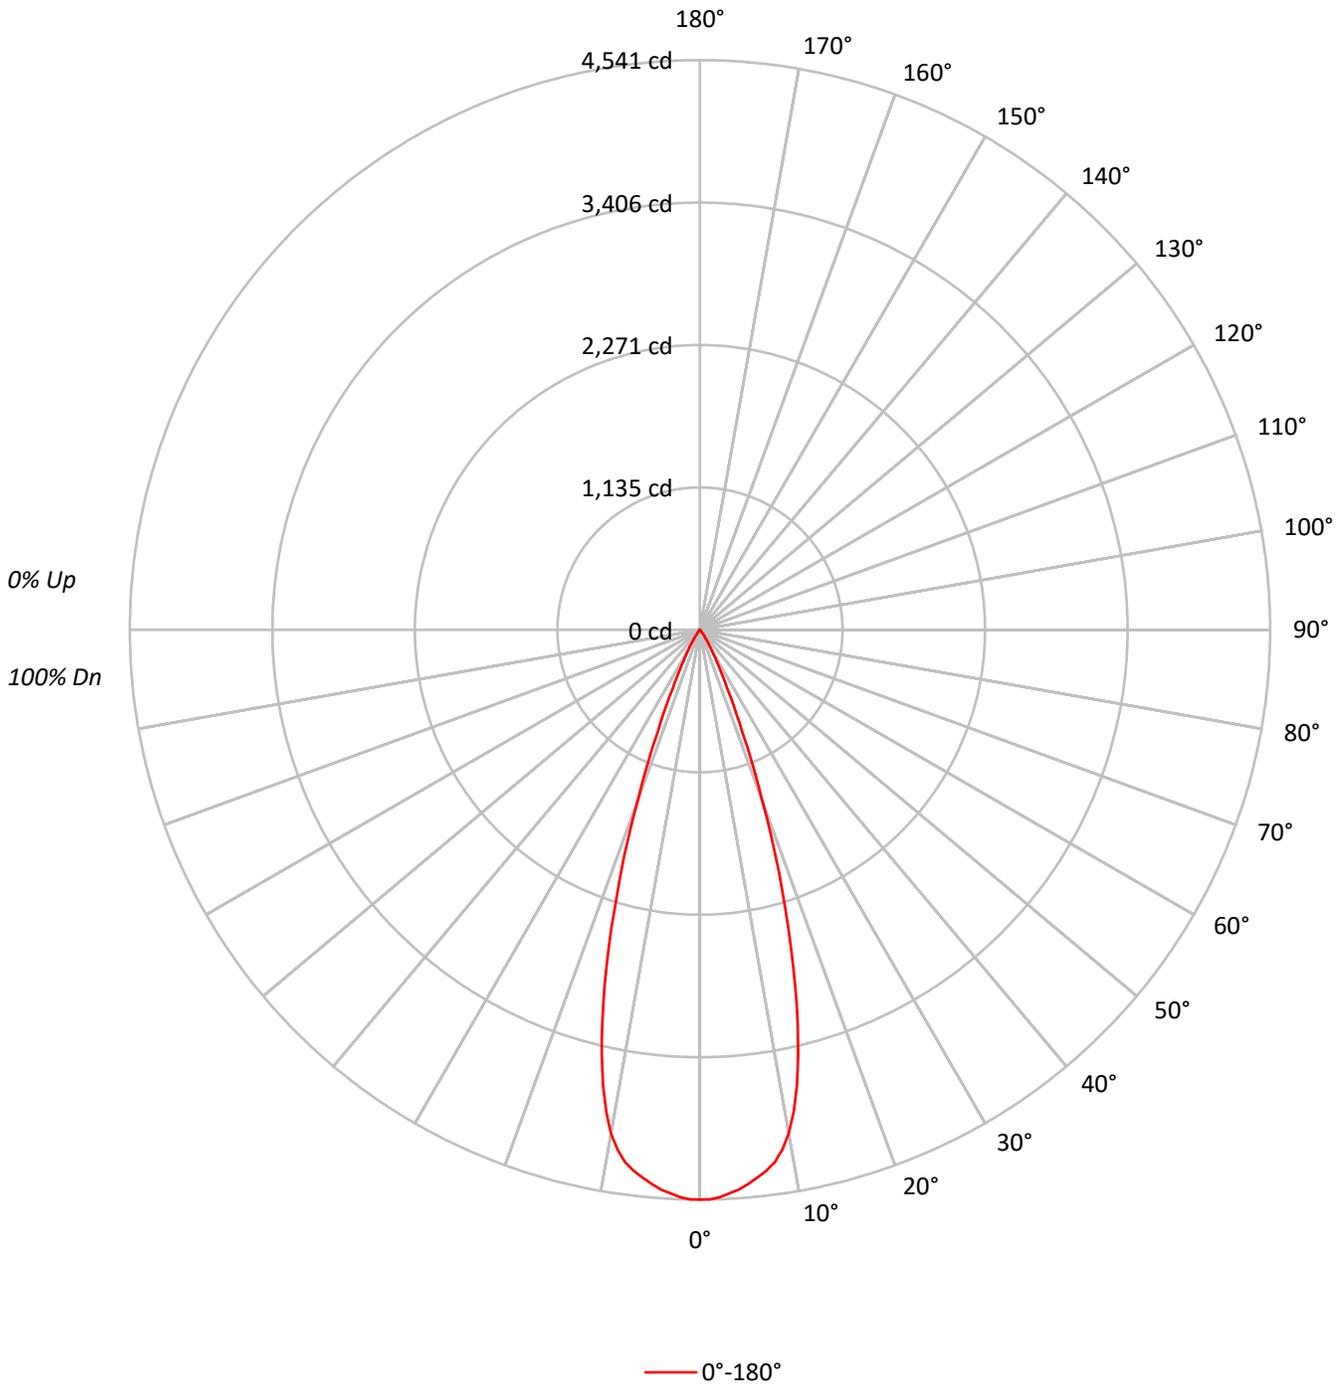



TEST NUMBER: P1249651
 CATALOG NUMBER: P3AS17R359027DE010 E3CB1MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96			96
2	111	107	104	101	109	105	103	100	102	100	98	99	98	96	97	95	94	93			93
3	107	102	98	95	105	101	97	95	98	96	93	96	94	92	94	92	90	89			89
4	104	98	94	91	102	97	93	90	95	92	89	93	90	88	91	89	87	86			86
5	100	94	90	87	99	93	89	86	92	88	86	90	87	85	89	86	84	83			83
6	97	91	86	83	96	90	86	83	89	85	82	87	84	82	86	83	81	80			80
7	94	87	83	80	93	87	83	80	86	82	79	85	81	79	84	81	79	78			78
8	91	84	80	77	90	84	80	77	83	79	77	82	79	76	81	78	76	75			75
9	89	82	77	74	88	81	77	74	80	77	74	80	76	74	79	76	74	73			73
10	86	79	75	72	85	79	75	72	78	74	72	77	74	72	77	74	71	70			70

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	995710
5°	975410
10°	907443
15°	665293
20°	340673
25°	122789
30°	47805
35°	16731
40°	6899
45°	1861
50°	1637
55°	1835
60°	1579
65°	1245
70°	1539
75°	2033
80°	1515
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 75°
 Luminance: 2033 cd/sqm



TEST NUMBER: P1249651
 CATALOG NUMBER: P3AS17R359027DE010 E3CB1MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	413.1	27.1
10°-20°	775.1	50.8
20°-30°	274.4	18.0
30°-40°	48.1	3.1
40°-50°	7.0	0.5
50°-60°	3.9	0.3
60°-70°	2.8	0.2
70°-80°	2.1	0.1
80°-90°	0.5	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1462.6	95.8
0°-40°	1510.7	98.9
0°-60°	1521.6	99.6
0°-90°	1527.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1527.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4541	
5°	4431	413
15°	2931	775
25°	508	274
35°	62	48
45°	6	7
55°	5	4
65°	2	3
75°	2	2
85°	0	0
90°	0	



TEST NUMBER: P1249651
CATALOG NUMBER: P3AS17R359027DE010 E3CB1MMS

CANDELA DISTRIBUTION (FULL):

0°	
0°	4540.8
1°	4539.6
2°	4525.1
3°	4497.5
4°	4472.2
5°	4431.3
6°	4389.3
7°	4342.4
8°	4284.6
9°	4194.4
10°	4075.4
11°	3910.6
12°	3712.2
13°	3476.5
14°	3216.8
15°	2930.6
17.5°	2182.6
20°	1459.9
22.5°	880.3
25°	507.5
27.5°	303.0
30°	188.8
32.5°	109.4
35°	62.5
37.5°	39.7
40°	24.1
42.5°	12.0
45°	6.0
47.5°	4.8
50°	4.8
52.5°	4.8
55°	4.8
57.5°	3.6
60°	3.6
62.5°	3.6
65°	2.4
67.5°	2.4
70°	2.4
72.5°	2.4
75°	2.4
77.5°	1.2
80°	1.2
82.5°	1.2
85°	0.0
87.5°	0.0



TEST NUMBER: P1249651
CATALOG NUMBER: P3AS17R359027DE010 E3CB1MMS

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)