

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1249886

Luminaire Tested: P3AS20R159027D010 E3DL1LI

Issue Date: 1/30/2026

**Test Information**

Test Method: LM-79-2019  
Report Number: P1249886  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-3)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS20R159027D010 E3DL1LI  
Description: 3in Adjustable LED luminaire with, R15 optic, 2700K CCT AND, 90CRI , E3DL1LI TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 1638.0 lumens  
Efficiency: N/A  
Efficacy: 56.9 lumens/watt  
Spacing Criteria (0/90/45): 0.4 / 0.4 / 0.43  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct

Input Watts (W): 28.8  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1249886

CATALOG NUMBER: P3AS20R159027D010 E3DL1LI

### Luminous Intensity Polar Plot

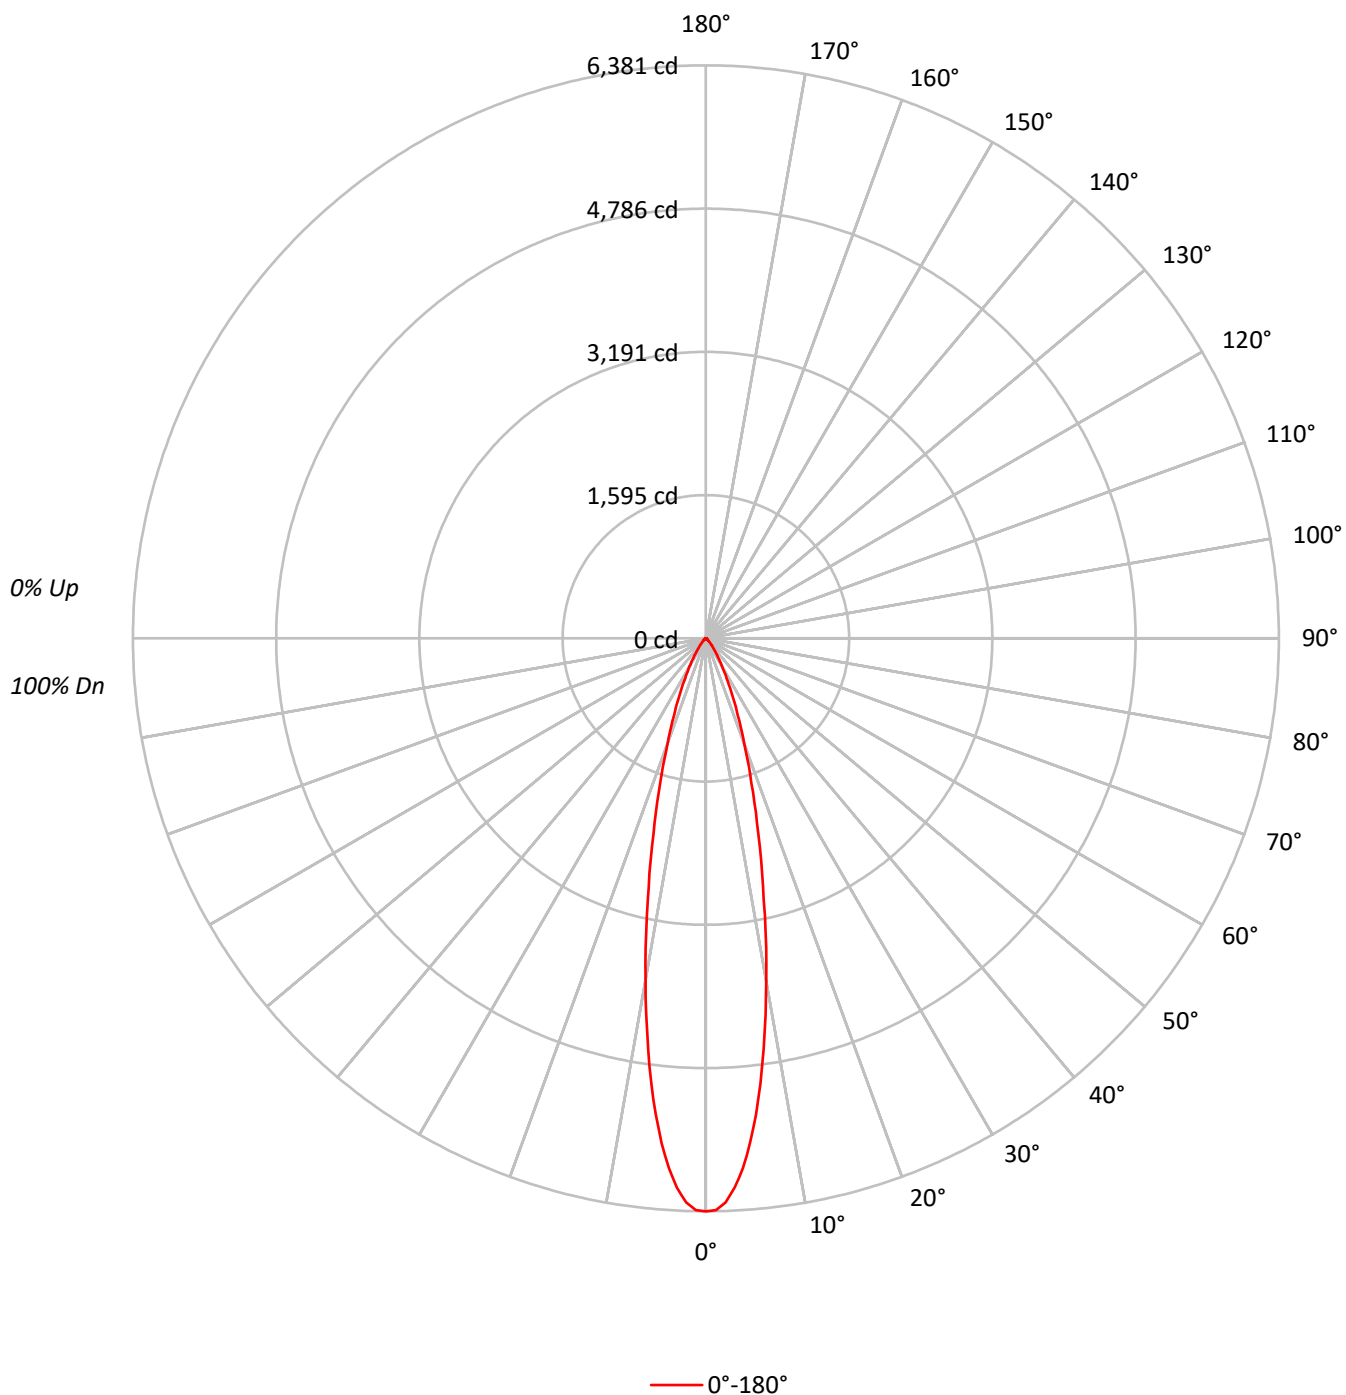

TEST NUMBER: P1249886

CATALOG NUMBER: P3AS20R159027D010 E3DL1LI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |  |     |     |     |     |  |     |     |     |  |     |     |     |  |     |     |     |
|-----|-----|-----|-----|-----|--|-----|-----|-----|-----|--|-----|-----|-----|--|-----|-----|-----|--|-----|-----|-----|
| RF  | 20  |     |     |     |  | 20  |     |     |     |  | 20  |     |     |  |     | 20  |     |  |     |     | 20  |
| RC  | 80  |     |     |     |  | 70  |     |     |     |  | 30  |     |     |  |     | 10  |     |  |     |     | 0   |
| RW  | 70  | 50  | 30  | 10  |  | 70  | 50  | 30  | 10  |  | 50  | 30  | 10  |  | 50  | 30  | 10  |  | 50  | 30  | 10  |
| RCR |     |     |     |     |  |     |     |     |     |  |     |     |     |  |     |     |     |  |     |     |     |
| 0   | 119 | 119 | 119 | 119 |  | 116 | 116 | 116 | 116 |  | 111 | 111 | 111 |  | 106 | 106 | 106 |  | 102 | 102 | 102 |
| 1   | 114 | 112 | 110 | 108 |  | 112 | 110 | 108 | 106 |  | 106 | 104 | 103 |  | 102 | 101 | 100 |  | 99  | 98  | 97  |
| 2   | 110 | 106 | 103 | 100 |  | 108 | 104 | 101 | 99  |  | 101 | 99  | 97  |  | 98  | 96  | 95  |  | 96  | 94  | 93  |
| 3   | 106 | 101 | 97  | 93  |  | 104 | 99  | 96  | 93  |  | 97  | 94  | 91  |  | 94  | 92  | 90  |  | 92  | 90  | 88  |
| 4   | 102 | 96  | 92  | 88  |  | 100 | 95  | 91  | 88  |  | 93  | 89  | 87  |  | 91  | 88  | 86  |  | 89  | 87  | 85  |
| 5   | 98  | 92  | 87  | 84  |  | 97  | 91  | 87  | 83  |  | 89  | 85  | 83  |  | 88  | 84  | 82  |  | 86  | 83  | 81  |
| 6   | 95  | 88  | 83  | 80  |  | 94  | 87  | 83  | 80  |  | 86  | 82  | 79  |  | 85  | 81  | 79  |  | 83  | 80  | 78  |
| 7   | 92  | 85  | 80  | 77  |  | 91  | 84  | 80  | 76  |  | 83  | 79  | 76  |  | 82  | 78  | 76  |  | 81  | 78  | 75  |
| 8   | 89  | 81  | 77  | 74  |  | 88  | 81  | 77  | 73  |  | 80  | 76  | 73  |  | 79  | 75  | 73  |  | 78  | 75  | 73  |
| 9   | 86  | 79  | 74  | 71  |  | 85  | 78  | 74  | 71  |  | 77  | 73  | 71  |  | 77  | 73  | 70  |  | 76  | 73  | 70  |
| 10  | 84  | 76  | 71  | 68  |  | 83  | 76  | 71  | 68  |  | 75  | 71  | 68  |  | 74  | 71  | 68  |  | 74  | 70  | 68  |

**AVERAGE LUMINANCE (cd/sqm):**

|     |         |
|-----|---------|
|     | 0°      |
| 0°  | 1399274 |
| 5°  | 1242084 |
| 10° | 862576  |
| 15° | 510105  |
| 20° | 290525  |
| 25° | 166074  |
| 30° | 91888   |
| 35° | 48988   |
| 40° | 27108   |
| 45° | 14668   |
| 50° | 9143    |
| 55° | 7226    |
| 60° | 6228    |
| 65° | 5707    |
| 70° | 5065    |
| 75° | 5338    |
| 80° | 4041    |
| 85° | 4026    |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 14668 cd/sqm

TEST NUMBER: P1249886

CATALOG NUMBER: P3AS20R159027D010 E3DL1LI

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 479.8  | 29.3      |
| 10°-20°   | 633.3  | 38.7      |
| 20°-30°   | 326.1  | 19.9      |
| 30°-40°   | 122.4  | 7.5       |
| 40°-50°   | 40.1   | 2.4       |
| 50°-60°   | 17.2   | 1.1       |
| 60°-70°   | 10.9   | 0.7       |
| 70°-80°   | 6.4    | 0.4       |
| 80°-90°   | 1.7    | 0.1       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| <hr/>     |        |           |
| 0°-30°    | 1439.2 | 87.9      |
| 0°-40°    | 1561.6 | 95.3      |
| 0°-60°    | 1618.9 | 98.8      |
| 0°-90°    | 1638.0 | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 1638.0 | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°   | Flux |
|-----|------|------|
| 0°  | 6381 |      |
| 5°  | 5643 | 480  |
| 15° | 2247 | 633  |
| 25° | 686  | 326  |
| 35° | 183  | 122  |
| 45° | 47   | 40   |
| 55° | 19   | 17   |
| 65° | 11   | 11   |
| 75° | 6    | 6    |
| 85° | 2    | 2    |
| 90° | 0    |      |

TEST NUMBER: P1249886

CATALOG NUMBER: P3AS20R159027D010 E3DL1LI

**CANDELA DISTRIBUTION (FULL):**

| 0°    |        |
|-------|--------|
| 0°    | 6381.2 |
| 1°    | 6368.6 |
| 2°    | 6285.0 |
| 3°    | 6125.6 |
| 4°    | 5915.7 |
| 5°    | 5642.8 |
| 6°    | 5333.5 |
| 7°    | 4994.2 |
| 8°    | 4617.1 |
| 9°    | 4244.7 |
| 10°   | 3873.9 |
| 12.5° | 2980.8 |
| 15°   | 2247.0 |
| 17.5° | 1682.1 |
| 20°   | 1245.0 |
| 22.5° | 929.4  |
| 25°   | 686.4  |
| 27.5° | 500.2  |
| 30°   | 362.9  |
| 32.5° | 257.2  |
| 35°   | 183.0  |
| 37.5° | 131.0  |
| 40°   | 94.7   |
| 42.5° | 67.9   |
| 45°   | 47.3   |
| 47.5° | 34.7   |
| 50°   | 26.8   |
| 52.5° | 22.1   |
| 55°   | 18.9   |
| 57.5° | 15.8   |
| 60°   | 14.2   |
| 62.5° | 12.6   |
| 65°   | 11.0   |
| 67.5° | 9.5    |
| 70°   | 7.9    |
| 72.5° | 7.9    |
| 75°   | 6.3    |
| 77.5° | 4.7    |
| 80°   | 3.2    |
| 82.5° | 3.2    |
| 85°   | 1.6    |
| 87.5° | 0.0    |
| 90°   | 0.0    |

(END OF REPORT)