

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1249895

Luminaire Tested: P3AS20R159027D010 E3DLD1WMH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1249895
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-2)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS20R159027D010 E3DLD1WMH
Description: 3in Adjustable LED luminaire with, R15 optic, 2700K CCT AND, 90CRI , E3DLD1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1244.9 lumens
Efficiency: N/A
Efficacy: 43.2 lumens/watt
Spacing Criteria (0/90/45): 0.76 / 0.76 / 0.82
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 28.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1249895

CATALOG NUMBER: P3AS20R159027D010 E3DLD1WMH

Luminous Intensity Polar Plot

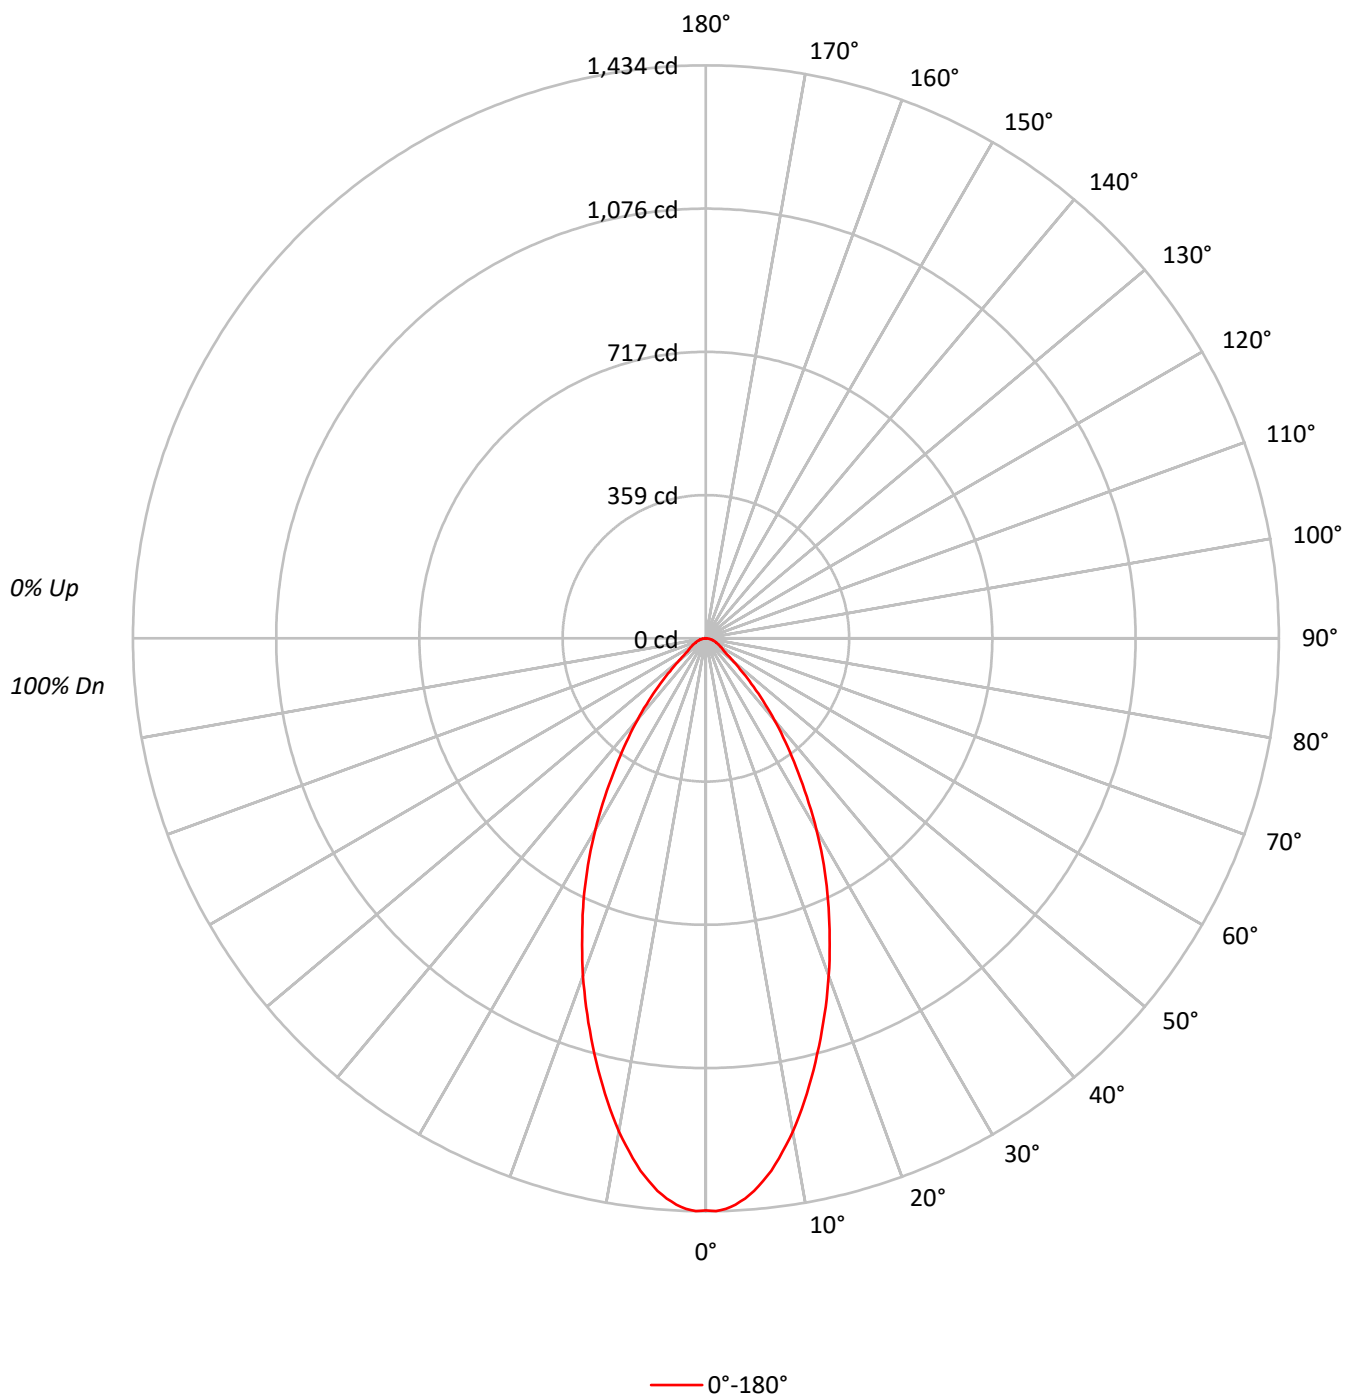

TEST NUMBER: P1249895

CATALOG NUMBER: P3AS20R159027D010 E3DLD1WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	109	107	104	110	107	105	102	103	101	99		99	98	96		96
2	106	100	96	92	104	99	95	91	95	92	89		92	90	87		90
3	100	93	87	83	98	91	86	82	89	84	81		86	82	79		84
4	94	86	80	75	92	85	79	74	82	77	73		80	76	73		78
5	89	80	73	68	87	79	73	68	77	72	67		75	71	67		74
6	84	74	68	63	83	73	67	63	72	66	62		70	66	62		69
7	80	69	63	58	78	69	63	58	67	62	58		66	61	57		65
8	76	65	59	54	74	65	58	54	63	58	54		62	57	54		61
9	72	61	55	51	71	61	55	51	60	54	50		59	54	50		58
10	68	58	52	48	67	57	51	47	57	51	47		56	51	47		55

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	314032
5°	305524
10°	279198
15°	244542
20°	209785
25°	175147
30°	140173
35°	105123
40°	76286
45°	49897
50°	31214
55°	21103
60°	18683
65°	17174
70°	16157
75°	14657
80°	13891
85°	11825

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 49897 cd/sqm

TEST NUMBER: P1249895

CATALOG NUMBER: P3AS20R159027D010 E3DLD1WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	128.1	10.3
10°-20°	300.1	24.1
20°-30°	330.7	26.6
30°-40°	247.6	19.9
40°-50°	128.4	10.3
50°-60°	53.2	4.3
60°-70°	33.0	2.6
70°-80°	18.5	1.5
80°-90°	5.4	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	758.9	61.0
0°-40°	1006.6	80.9
0°-60°	1188.1	95.4
0°-90°	1244.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1244.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1432	
5°	1388	128
15°	1077	300
25°	724	331
35°	393	248
45°	161	128
55°	55	53
65°	33	33
75°	17	18
85°	5	5
90°	0	

TEST NUMBER: P1249895

CATALOG NUMBER: P3AS20R159027D010 E3DLD1WMH

CANDELA DISTRIBUTION (FULL):

0°	
0°	1432.1
1°	1433.7
2°	1429.0
3°	1419.5
4°	1405.3
5°	1388.0
6°	1365.9
7°	1342.2
8°	1313.8
9°	1283.9
10°	1253.9
12.5°	1167.1
15°	1077.2
17.5°	987.3
20°	899.0
22.5°	809.1
25°	723.9
27.5°	638.8
30°	553.6
32.5°	470.0
35°	392.7
37.5°	326.5
40°	266.5
42.5°	211.3
45°	160.9
47.5°	121.4
50°	91.5
52.5°	67.8
55°	55.2
57.5°	48.9
60°	42.6
62.5°	37.9
65°	33.1
67.5°	28.4
70°	25.2
72.5°	20.5
75°	17.3
77.5°	14.2
80°	11.0
82.5°	7.9
85°	4.7
87.5°	1.6
90°	0.0

(END OF REPORT)