

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1250219

Luminaire Tested: P3AS24R159027D010 E3CB1MMS

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1250219
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-4)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS24R159027D010 E3CB1MMS
Description: 3in Adjustable LED luminaire with, R15 optic, 2700K CCT AND, 90CRI , E3CB1MMS TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2286.0 lumens
Efficiency: N/A
Efficacy: 79.4 lumens/watt
Spacing Criteria (0/90/45): 0.3 / 0.3 / 0.29
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 28.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1250219
CATALOG NUMBER: P3AS24R159027D010 E3CB1MMS

Luminous Intensity Polar Plot

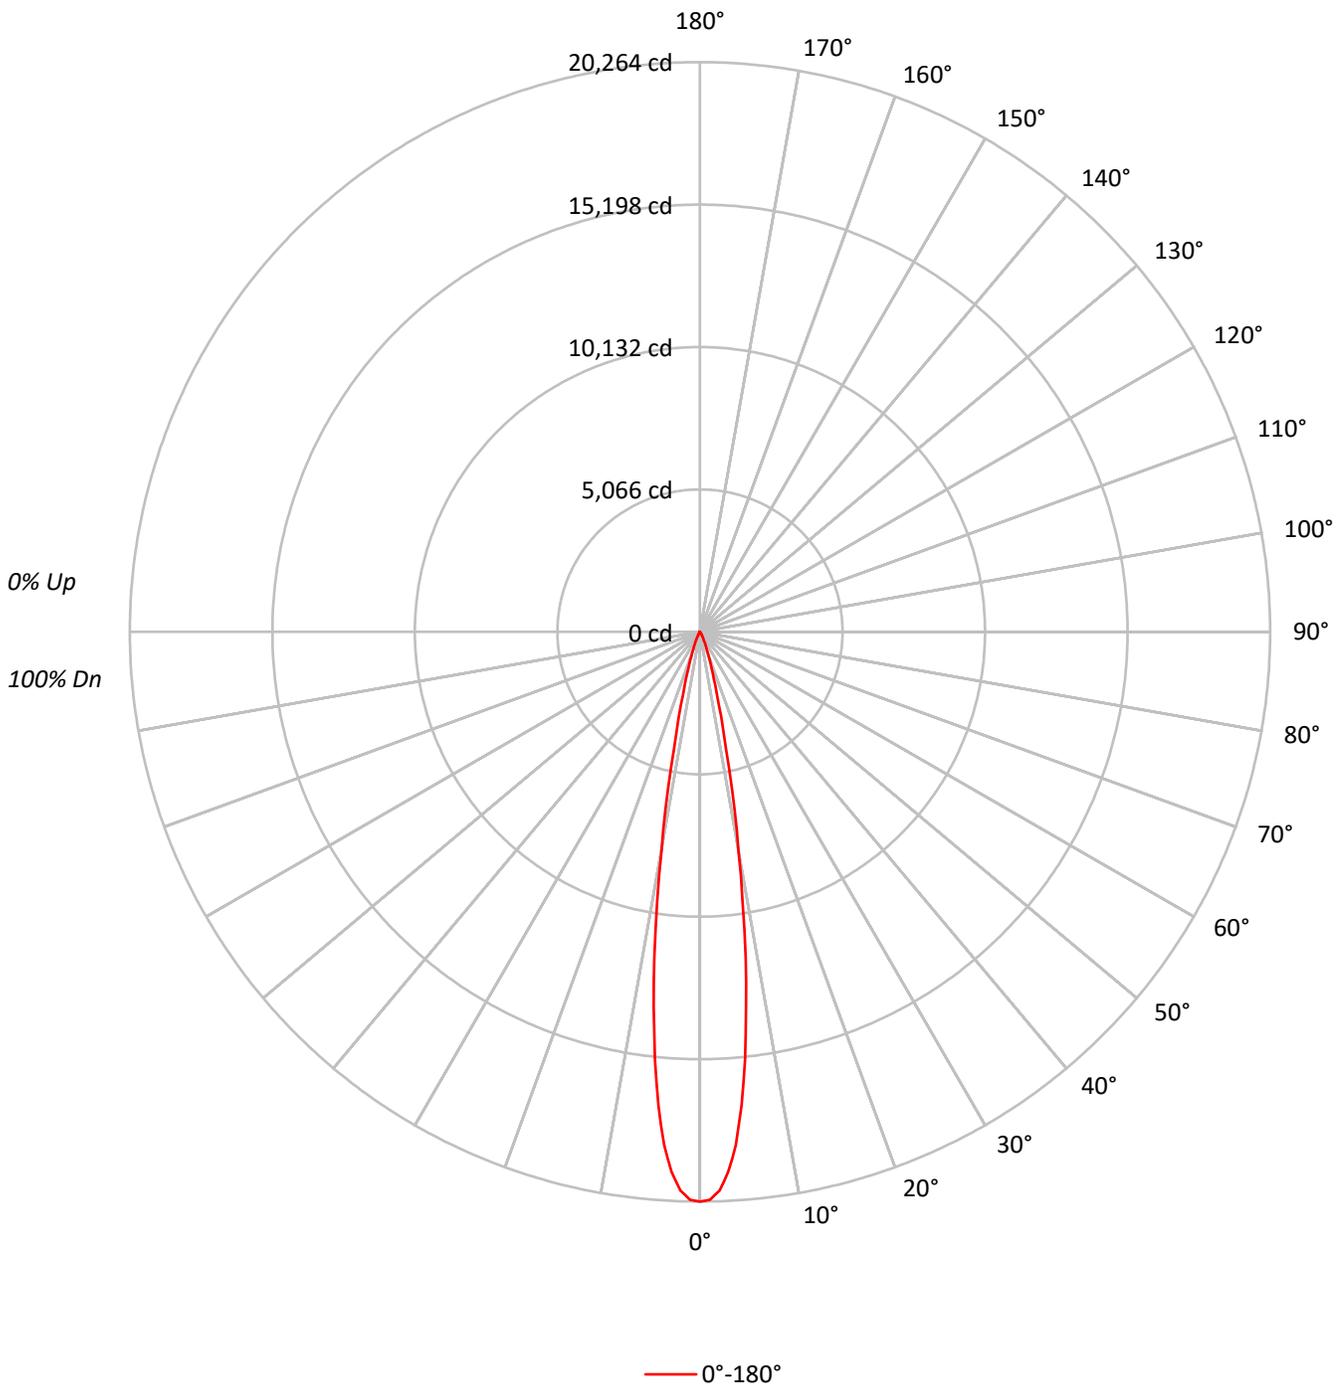



TEST NUMBER: P1250219
 CATALOG NUMBER: P3AS24R159027D010 E3CB1MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	116	114	112	111	113	112	110	109	108	107	106	104	103	103	101	100	100	98	98	98	98
2	113	110	107	105	111	108	106	104	105	103	101	102	101	99	99	98	97	96	96	96	96
3	110	106	103	100	108	105	102	100	102	100	98	100	98	97	98	97	95	94	94	94	94
4	107	103	100	97	106	102	99	97	100	97	95	98	96	94	97	95	93	92	92	92	92
5	105	100	97	94	104	99	96	94	98	95	93	96	94	92	95	93	92	91	91	91	91
6	103	98	94	92	102	97	94	92	96	93	91	95	92	91	94	92	90	89	89	89	89
7	101	96	92	90	100	95	92	90	94	91	89	93	91	89	92	90	89	88	88	88	88
8	99	94	90	88	98	93	90	88	92	90	88	92	89	87	91	89	87	86	86	86	86
9	97	92	89	87	97	92	89	87	91	88	86	90	88	86	90	87	86	85	85	85	85
10	96	90	87	85	95	90	87	85	89	87	85	89	86	85	88	86	85	84	84	84	84

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	4443438
5°	3724027
10°	1754165
15°	528857
20°	195690
25°	76093
30°	28384
35°	8700
40°	3092
45°	1675
50°	1228
55°	1376
60°	1579
65°	934
70°	1154
75°	1525
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 1675 cd/sqm



TEST NUMBER: P1250219
 CATALOG NUMBER: P3AS24R159027D010 E3CB1MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1307.9	57.2
10°-20°	777.5	34.0
20°-30°	163.3	7.1
30°-40°	26.3	1.2
40°-50°	4.5	0.2
50°-60°	3.2	0.1
60°-70°	2.0	0.1
70°-80°	1.2	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2248.7	98.4
0°-40°	2275.1	99.5
0°-60°	2282.8	99.9
0°-90°	2286.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2286.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	20264	
5°	16918	###
15°	2330	777
25°	314	163
35°	32	26
45°	5	4
55°	4	3
65°	2	2
75°	2	1
85°	0	0
90°	0	



TEST NUMBER: P1250219
CATALOG NUMBER: P3AS24R159027D010 E3CB1MMS

CANDELA DISTRIBUTION (FULL):

0°	
0°	20263.7
1°	20200.4
2°	19878.7
3°	19235.3
4°	18291.9
5°	16918.3
6°	15304.4
7°	13459.1
8°	11697.0
9°	9701.7
10°	7878.1
12.5°	4250.8
15°	2329.6
17.5°	1364.5
20°	838.6
22.5°	513.3
25°	314.5
27.5°	189.8
30°	112.1
32.5°	63.3
35°	32.5
37.5°	18.1
40°	10.8
42.5°	7.2
45°	5.4
47.5°	3.6
50°	3.6
52.5°	3.6
55°	3.6
57.5°	3.6
60°	3.6
62.5°	1.8
65°	1.8
67.5°	1.8
70°	1.8
72.5°	1.8
75°	1.8
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)