

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1250301

Luminaire Tested: P3AS24R259027D010 E3DLP1LI

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1250301
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-9)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS24R259027D010 E3DLP1LI
Description: 3in Adjustable LED luminaire with, R25 optic, 2700K CCT AND, 90CRI , E3DLP1LI TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1159.0 lumens
Efficiency: N/A
Efficacy: 40.2 lumens/watt
Spacing Criteria (0/90/45): 0.62 / 0.62 / 0.68
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 28.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1250301

CATALOG NUMBER: P3AS24R259027D010 E3DLP1LI

Luminous Intensity Polar Plot

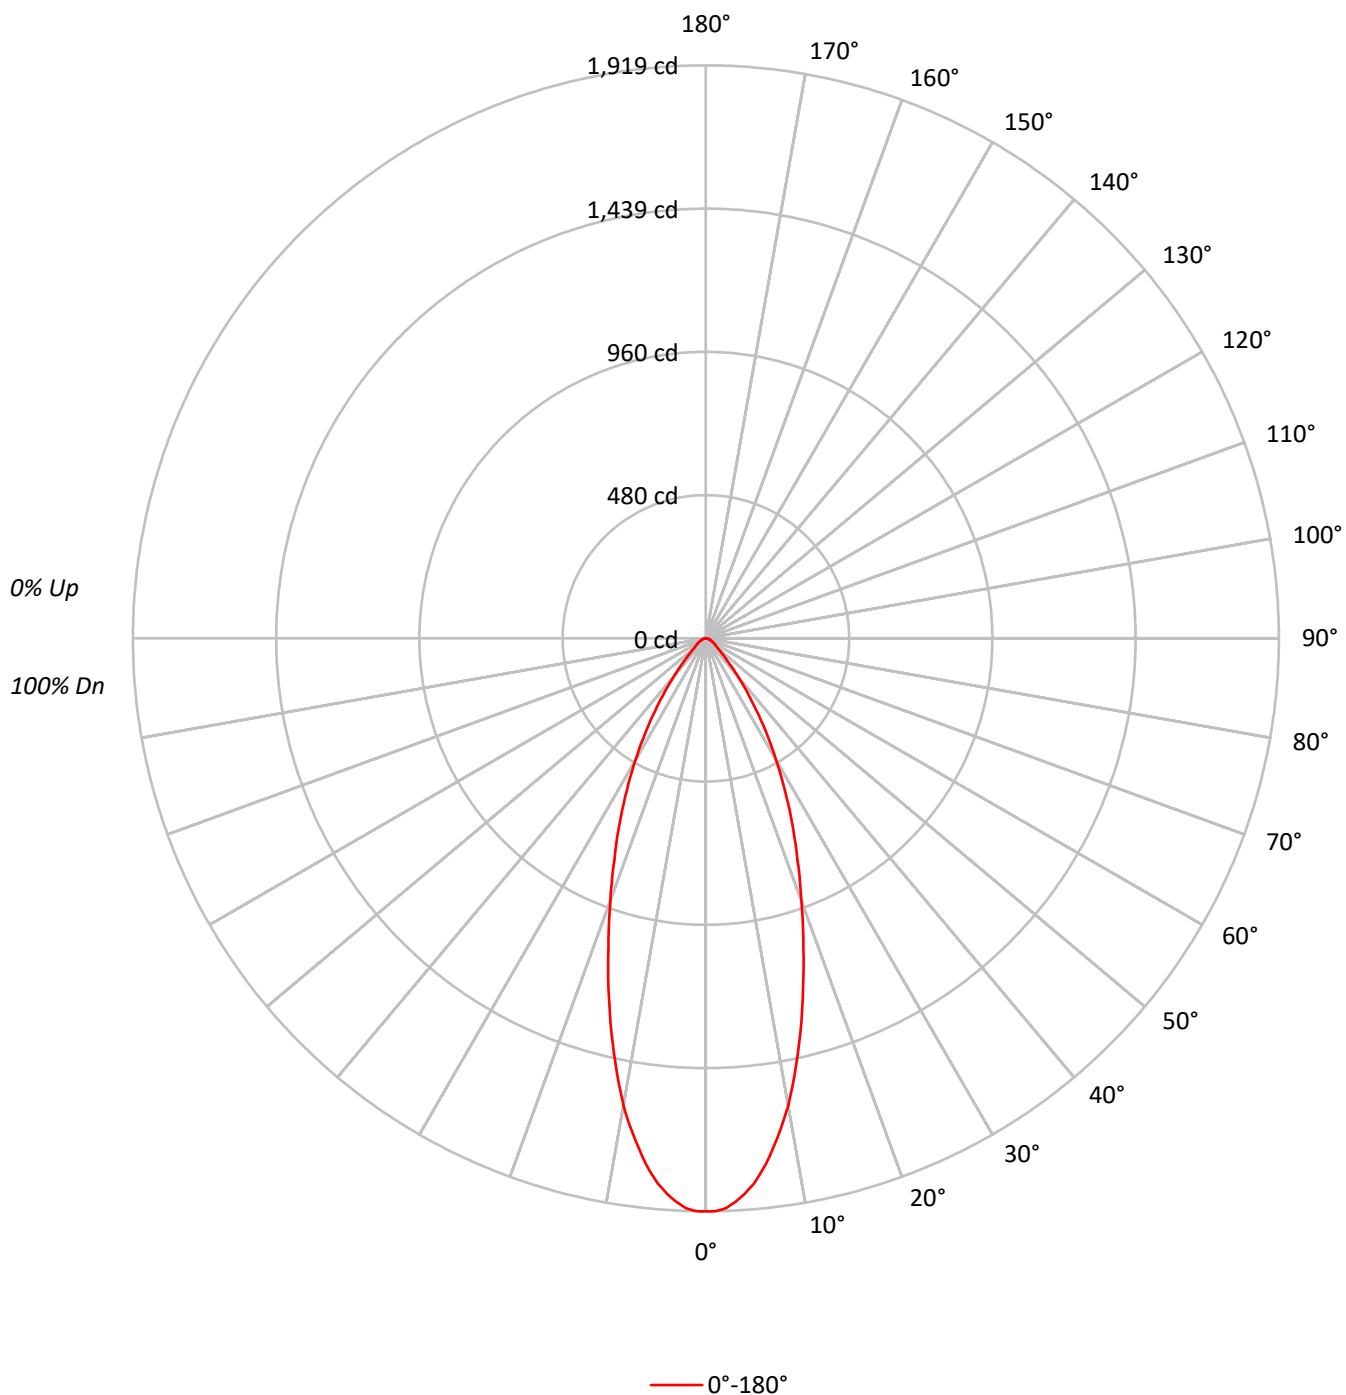

TEST NUMBER: P1250301

CATALOG NUMBER: P3AS24R259027D010 E3DLP1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	108	105	111	108	106	104	104	102	101		100	99	98		97
2	107	102	98	95	105	101	97	94	97	94	92		94	92	90		92
3	102	95	90	86	100	94	89	86	91	87	84		89	86	83		87
4	97	89	84	79	95	88	83	79	86	81	78		84	80	77		82
5	92	84	78	74	91	83	77	73	81	76	73		79	75	72		78
6	88	79	73	69	86	78	72	68	77	72	68		75	71	67		74
7	84	74	68	64	82	74	68	64	72	67	64		71	67	63		70
8	80	70	65	60	79	70	64	60	69	64	60		68	63	60		67
9	76	67	61	57	75	66	61	57	65	60	57		65	60	57		64
10	73	64	58	54	72	63	58	54	62	57	54		62	57	54		61

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	420778
5°	403697
10°	353656
15°	284270
20°	218419
25°	165251
30°	119411
35°	79317
40°	48090
45°	28003
50°	17876
55°	14489
60°	12674
65°	11259
70°	9296
75°	9150
80°	6819
85°	9057

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 28003 cd/sqm

TEST NUMBER: P1250301

CATALOG NUMBER: P3AS24R259027D010 E3DLP1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	167.0	14.4
10°-20°	346.3	29.9
20°-30°	313.1	27.0
30°-40°	188.1	16.2
40°-50°	74.7	6.4
50°-60°	34.4	3.0
60°-70°	21.0	1.8
70°-80°	11.2	1.0
80°-90°	3.2	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	826.4	71.3
0°-40°	1014.4	87.5
0°-60°	1123.6	96.9
0°-90°	1159.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1159.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1919	
5°	1834	167
15°	1252	346
25°	683	313
35°	296	188
45°	90	75
55°	38	34
65°	22	21
75°	11	11
85°	4	3
90°	0	

TEST NUMBER: P1250301

CATALOG NUMBER: P3AS24R259027D010 E3DLP1LI

CANDELA DISTRIBUTION (FULL):

0°	
0°	1918.9
1°	1918.9
2°	1909.9
3°	1890.0
4°	1864.7
5°	1834.0
6°	1794.2
7°	1749.1
8°	1696.7
9°	1644.3
10°	1588.3
11°	1523.2
12°	1456.4
13°	1389.5
14°	1322.6
15°	1252.2
17.5°	1085.9
20°	936.0
22.5°	800.5
25°	683.0
27.5°	572.8
30°	471.6
32.5°	379.4
35°	296.3
37.5°	225.9
40°	168.0
42.5°	122.9
45°	90.3
47.5°	68.7
50°	52.4
52.5°	43.4
55°	37.9
57.5°	32.5
60°	28.9
62.5°	23.5
65°	21.7
67.5°	18.1
70°	14.5
72.5°	12.6
75°	10.8
77.5°	9.0
80°	5.4
82.5°	3.6
85°	3.6
87.5°	1.8



TEST NUMBER: P1250301
CATALOG NUMBER: P3AS24R259027D010 E3DLP1LI

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)