

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1250379

Luminaire Tested: P3AS24R409027D010 E3DL1GPH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1250379
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-23)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS24R409027D010 E3DL1GPH
Description: 3in Adjustable LED luminaire with, R40 optic, 2700K CCT AND, 90CRI , E3DL1GPH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1032.0 lumens
Efficiency: N/A
Efficacy: 35.8 lumens/watt
Spacing Criteria (0/90/45): 0.65 / 0.65 / 0.63
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 28.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1250379
CATALOG NUMBER: P3AS24R409027D010 E3DL1GPH

Luminous Intensity Polar Plot

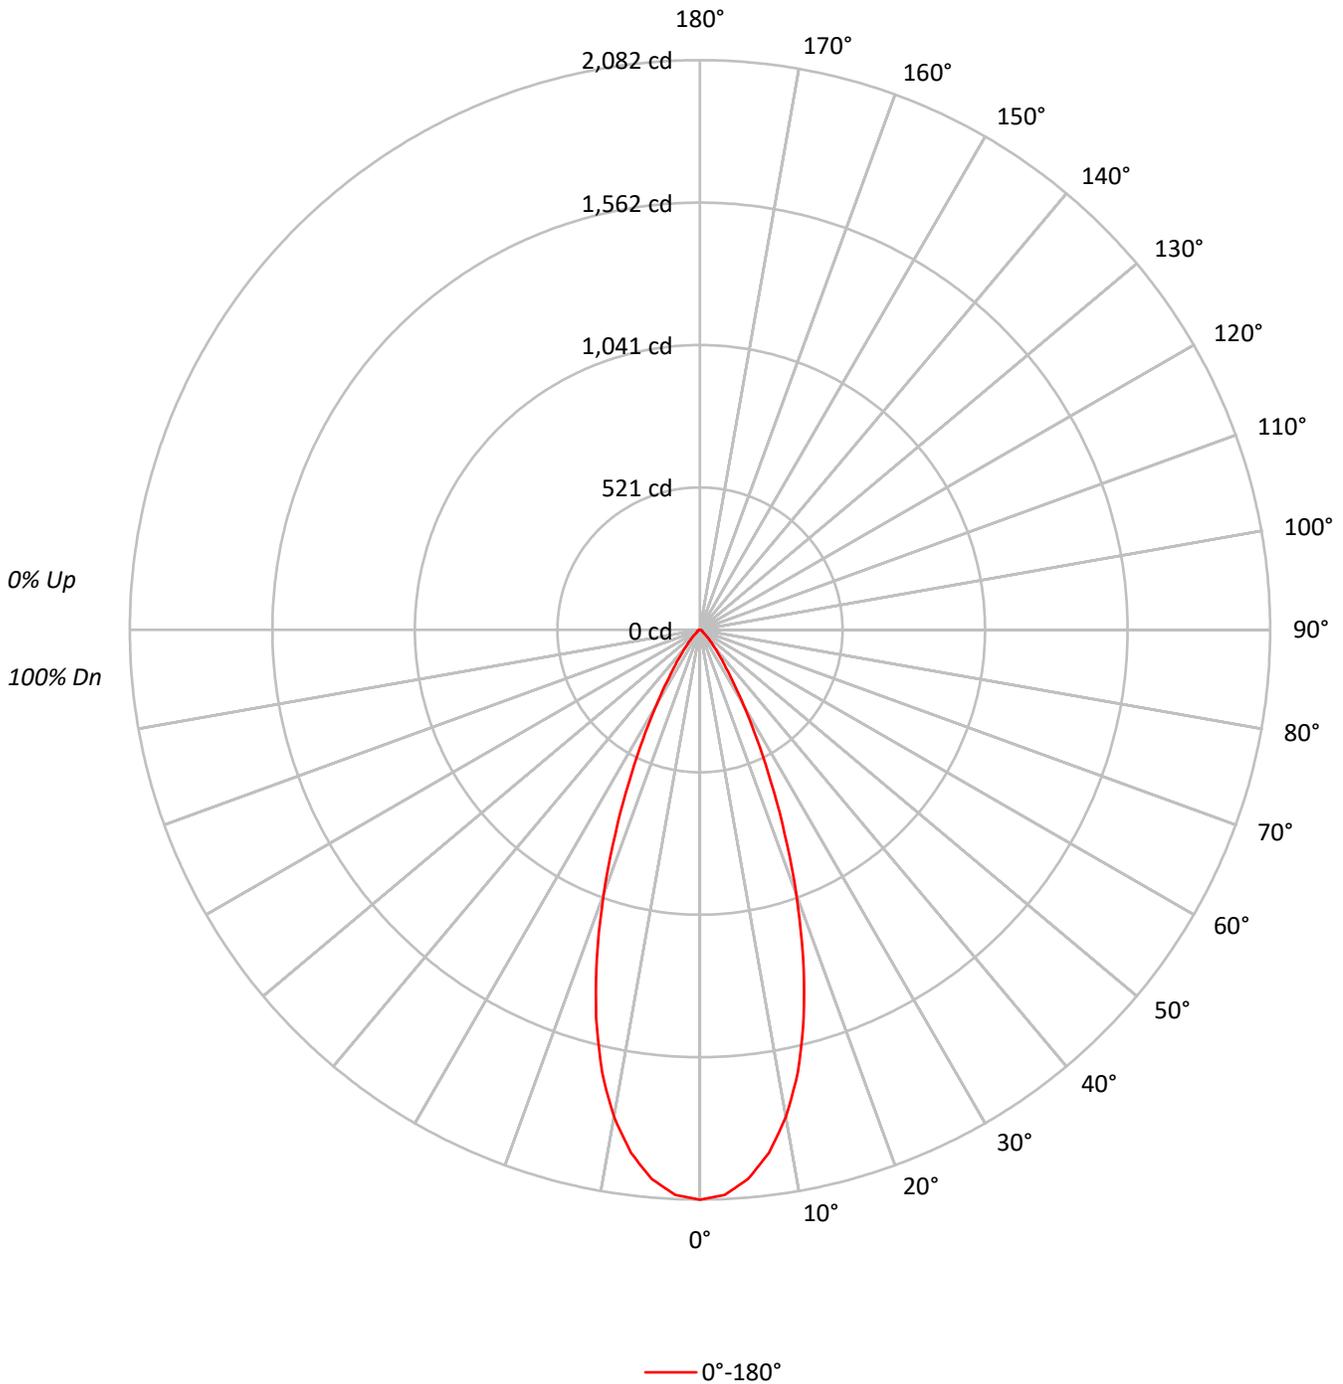



TEST NUMBER: P1250379

CATALOG NUMBER: P3AS24R409027D010 E3DL1GPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	102	102	102	100
1	114	111	109	107	112	109	107	105	105	104	102	102	100	99	98	97	96	96	96	96	94
2	109	105	101	98	107	103	100	97	100	97	95	97	95	93	94	92	91	91	91	91	89
3	104	99	94	91	102	97	93	90	95	91	88	92	89	87	90	88	86	86	86	86	84
4	100	93	88	85	98	92	88	84	90	86	83	88	85	82	86	84	81	81	81	81	80
5	96	88	83	79	94	88	83	79	86	82	78	84	81	78	83	80	77	77	77	77	76
6	92	84	79	75	91	83	78	75	82	78	74	81	77	74	79	76	73	73	73	73	72
7	88	80	75	71	87	79	74	71	78	74	71	77	73	70	76	73	70	70	70	70	69
8	85	76	71	68	84	76	71	67	75	70	67	74	70	67	73	69	67	67	67	67	65
9	82	73	68	64	81	73	68	64	72	67	64	71	67	64	70	66	64	64	64	64	63
10	78	70	65	62	78	70	65	61	69	64	61	68	64	61	67	64	61	61	61	61	60

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	456652
5°	443384
10°	402353
15°	332397
20°	239771
25°	148315
30°	80291
35°	41492
40°	22557
45°	12621
50°	6345
55°	4741
60°	4254
65°	4151
70°	3975
75°	3728
80°	3410
85°	2264

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 12621 cd/sqm



TEST NUMBER: P1250379
 CATALOG NUMBER: P3AS24R409027D010 E3DL1GPH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	185.7	18.0
10°-20°	398.7	38.6
20°-30°	284.5	27.6
30°-40°	104.7	10.1
40°-50°	33.0	3.2
50°-60°	11.5	1.1
60°-70°	7.9	0.8
70°-80°	4.7	0.5
80°-90°	1.3	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	868.9	84.2
0°-40°	973.6	94.3
0°-60°	1018.1	98.7
0°-90°	1032.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1032.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2082	
5°	2014	186
15°	1464	399
25°	613	285
35°	155	105
45°	41	33
55°	12	11
65°	8	8
75°	4	5
85°	1	1
90°	0	



TEST NUMBER: P1250379
CATALOG NUMBER: P3AS24R409027D010 E3DL1GPH

CANDELA DISTRIBUTION (FULL):

0°	
0°	2082.5
2.5°	2066.6
5°	2014.3
7.5°	1927.5
10°	1807.0
12.5°	1653.8
15°	1464.2
17.5°	1251.6
20°	1027.5
22.5°	807.0
25°	613.0
27.5°	450.0
30°	317.1
32.5°	222.3
35°	155.0
37.5°	109.8
40°	78.8
42.5°	56.7
45°	40.7
47.5°	27.5
50°	18.6
52.5°	13.3
55°	12.4
57.5°	11.5
60°	9.7
62.5°	8.9
65°	8.0
67.5°	7.1
70°	6.2
72.5°	5.3
75°	4.4
77.5°	3.5
80°	2.7
82.5°	1.8
85°	0.9
87.5°	0.9
90°	0.0

(END OF REPORT)