

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1250692

Luminaire Tested: P3AS02R159030DE010 E3DLP1GPH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1250692
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-1)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS02R159030DE010 E3DLP1GPH
Description: 3in Adjustable LED luminaire with, R15 optic, 3000K CCT AND, 90CRI , E3DLP1GPH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 74.0 lumens
Efficiency: N/A
Efficacy: 20.5 lumens/watt
Spacing Criteria (0/90/45): 0.52 / 0.52 / 0.61
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 3.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1250692

CATALOG NUMBER: P3AS02R159030DE010 E3DLP1GPH

Luminous Intensity Polar Plot

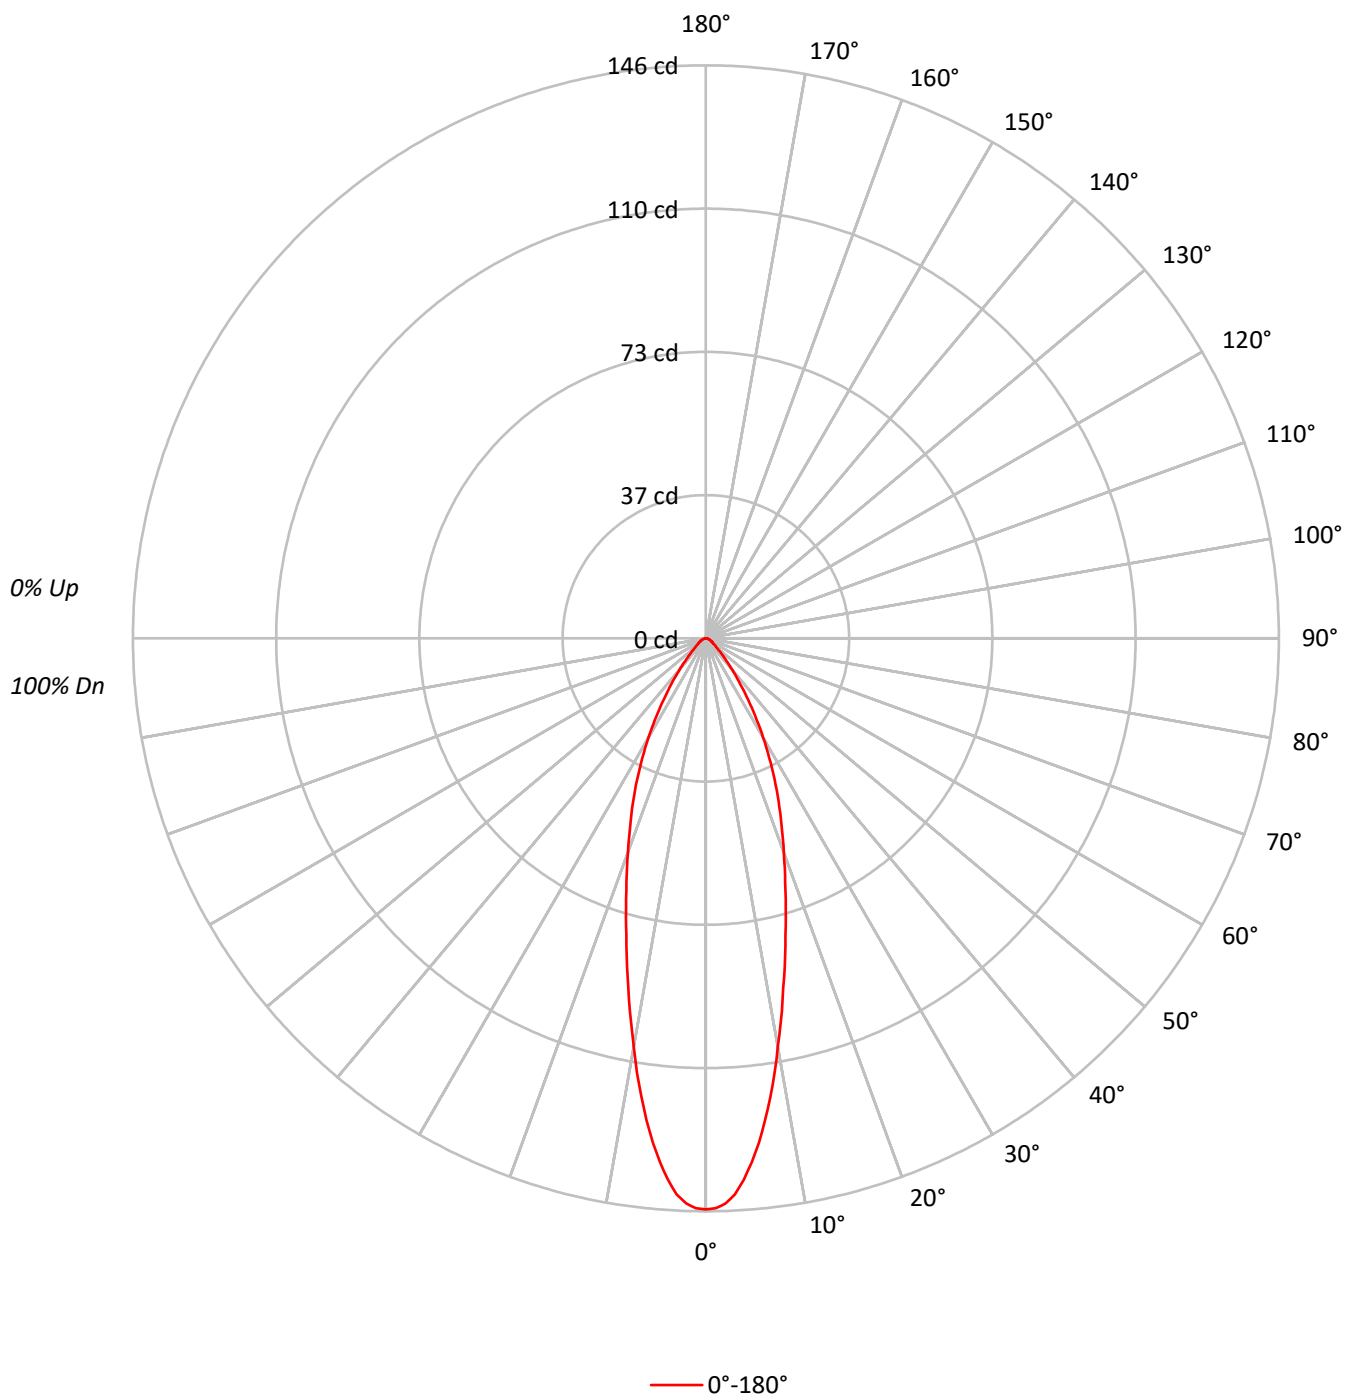

TEST NUMBER: P1250692

CATALOG NUMBER: P3AS02R159030DE010 E3DLP1GPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	108	106	111	108	106	104	104	102	101		100	99	98		97
2	108	103	99	95	105	101	97	94	98	95	92		95	92	90		92
3	102	96	91	87	100	94	90	86	92	88	85		89	86	83		87
4	97	90	84	80	95	88	83	79	86	82	78		84	81	78		82
5	93	84	78	74	91	83	78	74	81	77	73		80	76	73		78
6	88	79	73	69	87	79	73	69	77	72	69		76	71	68		74
7	84	75	69	65	83	74	69	65	73	68	64		72	67	64		71
8	80	71	65	61	79	71	65	61	69	64	61		68	64	61		68
9	77	68	62	58	76	67	62	58	66	61	58		65	61	57		64
10	74	64	59	55	73	64	59	55	63	58	55		62	58	55		62

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	31905
5°	29496
10°	23536
15°	17775
20°	13535
25°	10331
30°	7394
35°	4818
40°	2948
45°	1799
50°	1194
55°	918
60°	789
65°	675
70°	641
75°	593
80°	505
85°	252

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 1799 cd/sqm

TEST NUMBER: P1250692

CATALOG NUMBER: P3AS02R159030DE010 E3DLP1GPH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	11.9	16.0
10°-20°	21.9	29.6
20°-30°	19.5	26.4
30°-40°	11.5	15.6
40°-50°	4.7	6.4
50°-60°	2.2	3.0
60°-70°	1.4	1.8
70°-80°	0.7	1.0
80°-90°	0.2	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	53.3	72.0
0°-40°	64.8	87.6
0°-60°	71.7	97.0
0°-90°	74.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	74.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	146	
5°	134	12
15°	78	22
25°	43	20
35°	18	12
45°	6	5
55°	2	2
65°	1	1
75°	1	1
85°	0	0
90°	0	

TEST NUMBER: P1250692

CATALOG NUMBER: P3AS02R159030DE010 E3DLP1GPH

CANDELA DISTRIBUTION (FULL):

0°	
0°	145.5
1°	145.2
2°	144.1
3°	141.9
4°	138.3
5°	134.0
6°	129.3
7°	123.8
8°	118.0
9°	112.1
10°	105.7
12.5°	91.2
15°	78.3
17.5°	67.3
20°	58.0
22.5°	49.9
25°	42.7
27.5°	35.7
30°	29.2
32.5°	23.3
35°	18.0
37.5°	13.8
40°	10.3
42.5°	7.7
45°	5.8
47.5°	4.4
50°	3.5
52.5°	2.9
55°	2.4
57.5°	2.0
60°	1.8
62.5°	1.6
65°	1.3
67.5°	1.2
70°	1.0
72.5°	0.8
75°	0.7
77.5°	0.5
80°	0.4
82.5°	0.2
85°	0.1
87.5°	0.1
90°	0.0

(END OF REPORT)