

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1250743

Luminaire Tested: P3AS02R259030DE010 E3DL1WMH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1250743
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-11)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS02R259030DE010 E3DL1WMH
Description: 3in Adjustable LED luminaire with, R25 optic, 3000K CCT AND, 90CRI , E3DL1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 255.0 lumens
Efficiency: N/A
Efficacy: 70.8 lumens/watt
Spacing Criteria (0/90/45): 0.49 / 0.49 / 0.51
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 3.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1250743

CATALOG NUMBER: P3AS02R259030DE010 E3DL1WMH

Luminous Intensity Polar Plot

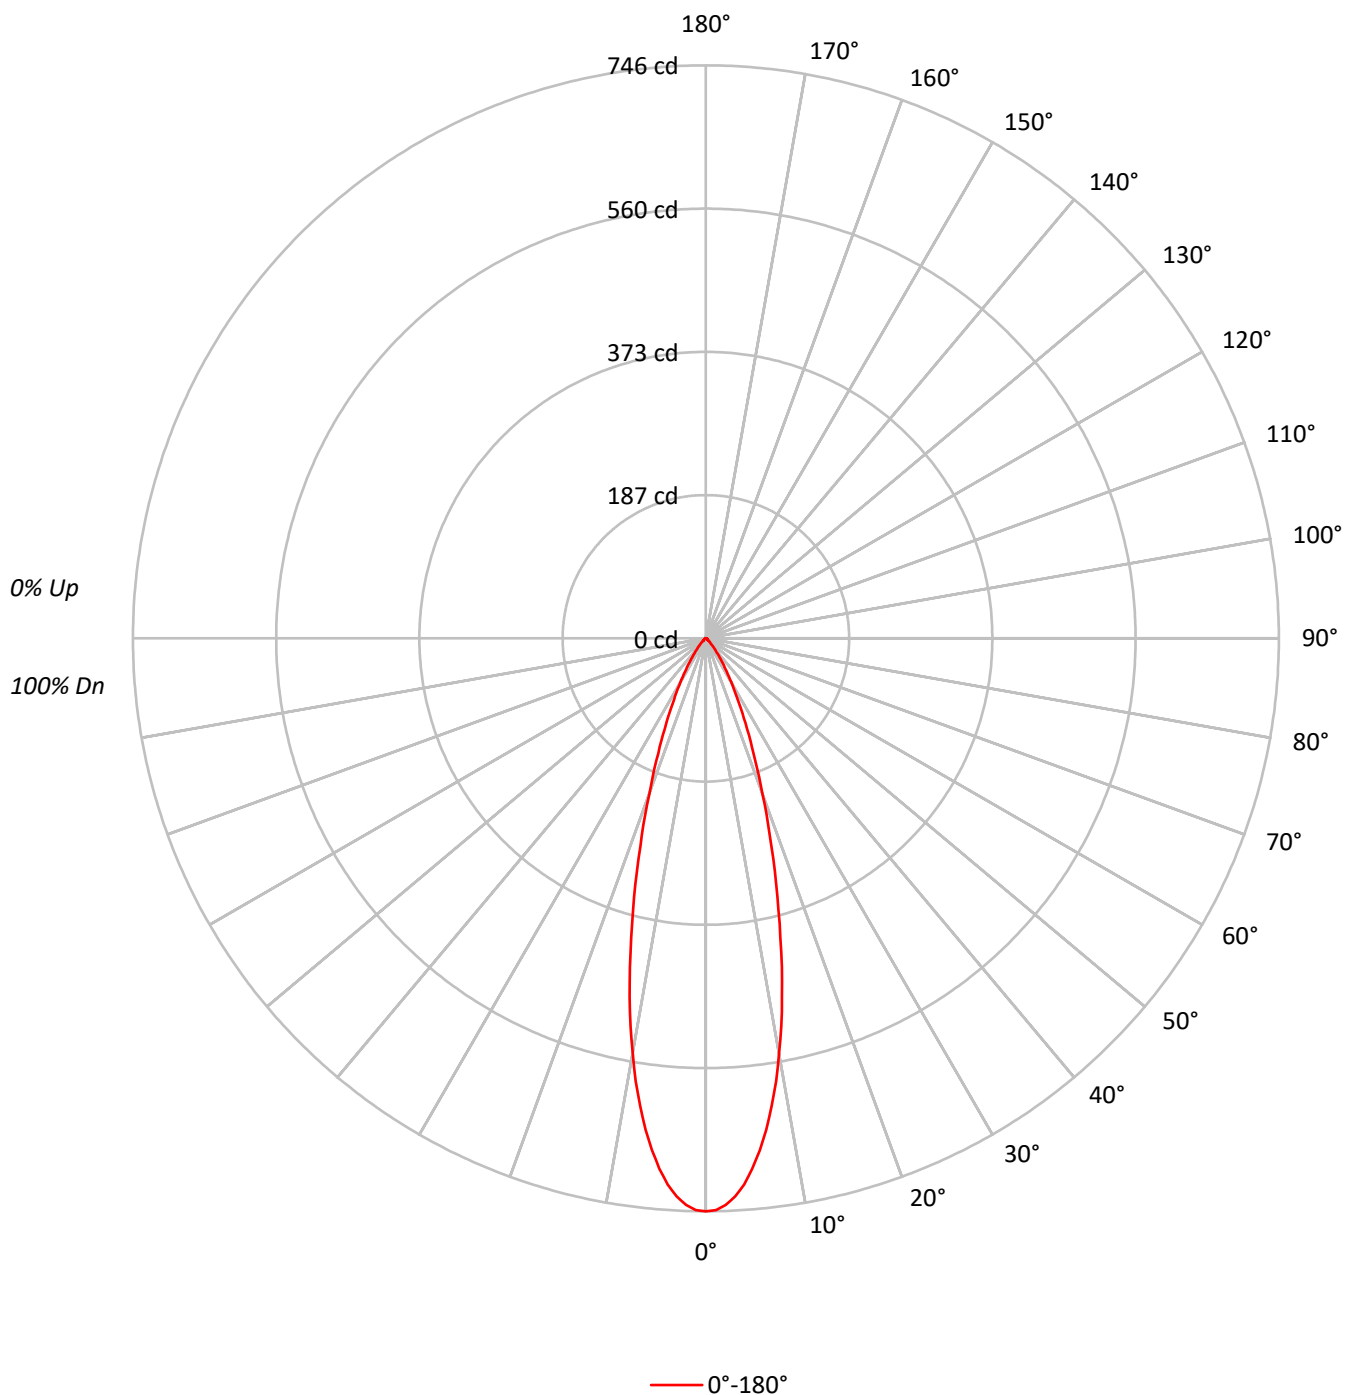



TEST NUMBER: P1250743

CATALOG NUMBER: P3AS02R259030DE010 E3DL1WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					30					10					0
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	114	112	110	108		112	110	108	106		106	104	103		102	101	100		99	98	97
2	110	105	102	99		107	104	101	98		101	98	96		98	96	94		95	93	92
3	105	100	96	92		103	98	95	91		96	93	90		94	91	89		91	89	87
4	101	95	90	87		99	94	89	86		92	88	85		90	87	84		88	85	83
5	97	90	85	82		96	89	85	81		88	84	81		86	83	80		85	82	79
6	94	86	81	78		92	86	81	78		84	80	77		83	79	77		82	78	76
7	90	83	78	74		89	82	77	74		81	77	74		80	76	73		79	75	73
8	87	79	74	71		86	79	74	71		78	74	71		77	73	70		76	73	70
9	84	76	71	68		83	76	71	68		75	71	68		74	70	68		73	70	67
10	81	73	69	65		80	73	68	65		72	68	65		72	68	65		71	67	65

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	163583
5°	152608
10°	122242
15°	82974
20°	50218
25°	29373
30°	16711
35°	9209
40°	4895
45°	2574
50°	1501
55°	1109
60°	965
65°	986
70°	962
75°	847
80°	631
85°	503

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 2574 cd/sqm

TEST NUMBER: P1250743

CATALOG NUMBER: P3AS02R259030DE010 E3DL1WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	61.5	24.1
10°-20°	100.5	39.4
20°-30°	57.4	22.5
30°-40°	22.7	8.9
40°-50°	6.9	2.7
50°-60°	2.7	1.1
60°-70°	1.8	0.7
70°-80°	1.0	0.4
80°-90°	0.3	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	219.4	86.1
0°-40°	242.1	95.0
0°-60°	251.8	98.8
0°-90°	255.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	255.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	746	
5°	693	62
15°	366	100
25°	121	57
35°	34	23
45°	8	7
55°	3	3
65°	2	2
75°	1	1
85°	0	0
90°	0	

TEST NUMBER: P1250743

CATALOG NUMBER: P3AS02R259030DE010 E3DL1WMH

CANDELA DISTRIBUTION (FULL):

0°	
0°	746.0
1°	744.5
2°	738.4
3°	727.7
4°	712.8
5°	693.3
6°	670.4
7°	644.6
8°	614.6
9°	583.9
10°	549.0
11°	514.7
12°	476.9
13°	439.6
14°	401.4
15°	365.5
17.5°	283.4
20°	215.2
22.5°	161.6
25°	121.4
27.5°	89.9
30°	66.0
32.5°	47.8
35°	34.4
37.5°	24.4
40°	17.1
42.5°	11.7
45°	8.3
47.5°	5.8
50°	4.4
52.5°	3.4
55°	2.9
57.5°	2.7
60°	2.2
62.5°	1.9
65°	1.9
67.5°	1.7
70°	1.5
72.5°	1.2
75°	1.0
77.5°	0.7
80°	0.5
82.5°	0.5
85°	0.2
87.5°	0.2



TEST NUMBER: P1250743

CATALOG NUMBER: P3AS02R259030DE010 E3DL1WMH

CANDELA DISTRIBUTION (continued):



(END OF REPORT)