

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1250770

Luminaire Tested: P3AS02R309030DE010 E3DL1GPH

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1250770  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-15)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS02R309030DE010 E3DL1GPH  
Description: 3in Adjustable LED luminaire with, R30 optic, 3000K CCT AND, 90CRI , E3DL1GPH TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 126.0 lumens  
Efficiency: N/A  
Efficacy: 35.0 lumens/watt  
Spacing Criteria (0/90/45): 0.54 / 0.54 / 0.54  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 3.6  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1250770  
CATALOG NUMBER: P3AS02R309030DE010 E3DL1GPH

### Luminous Intensity Polar Plot

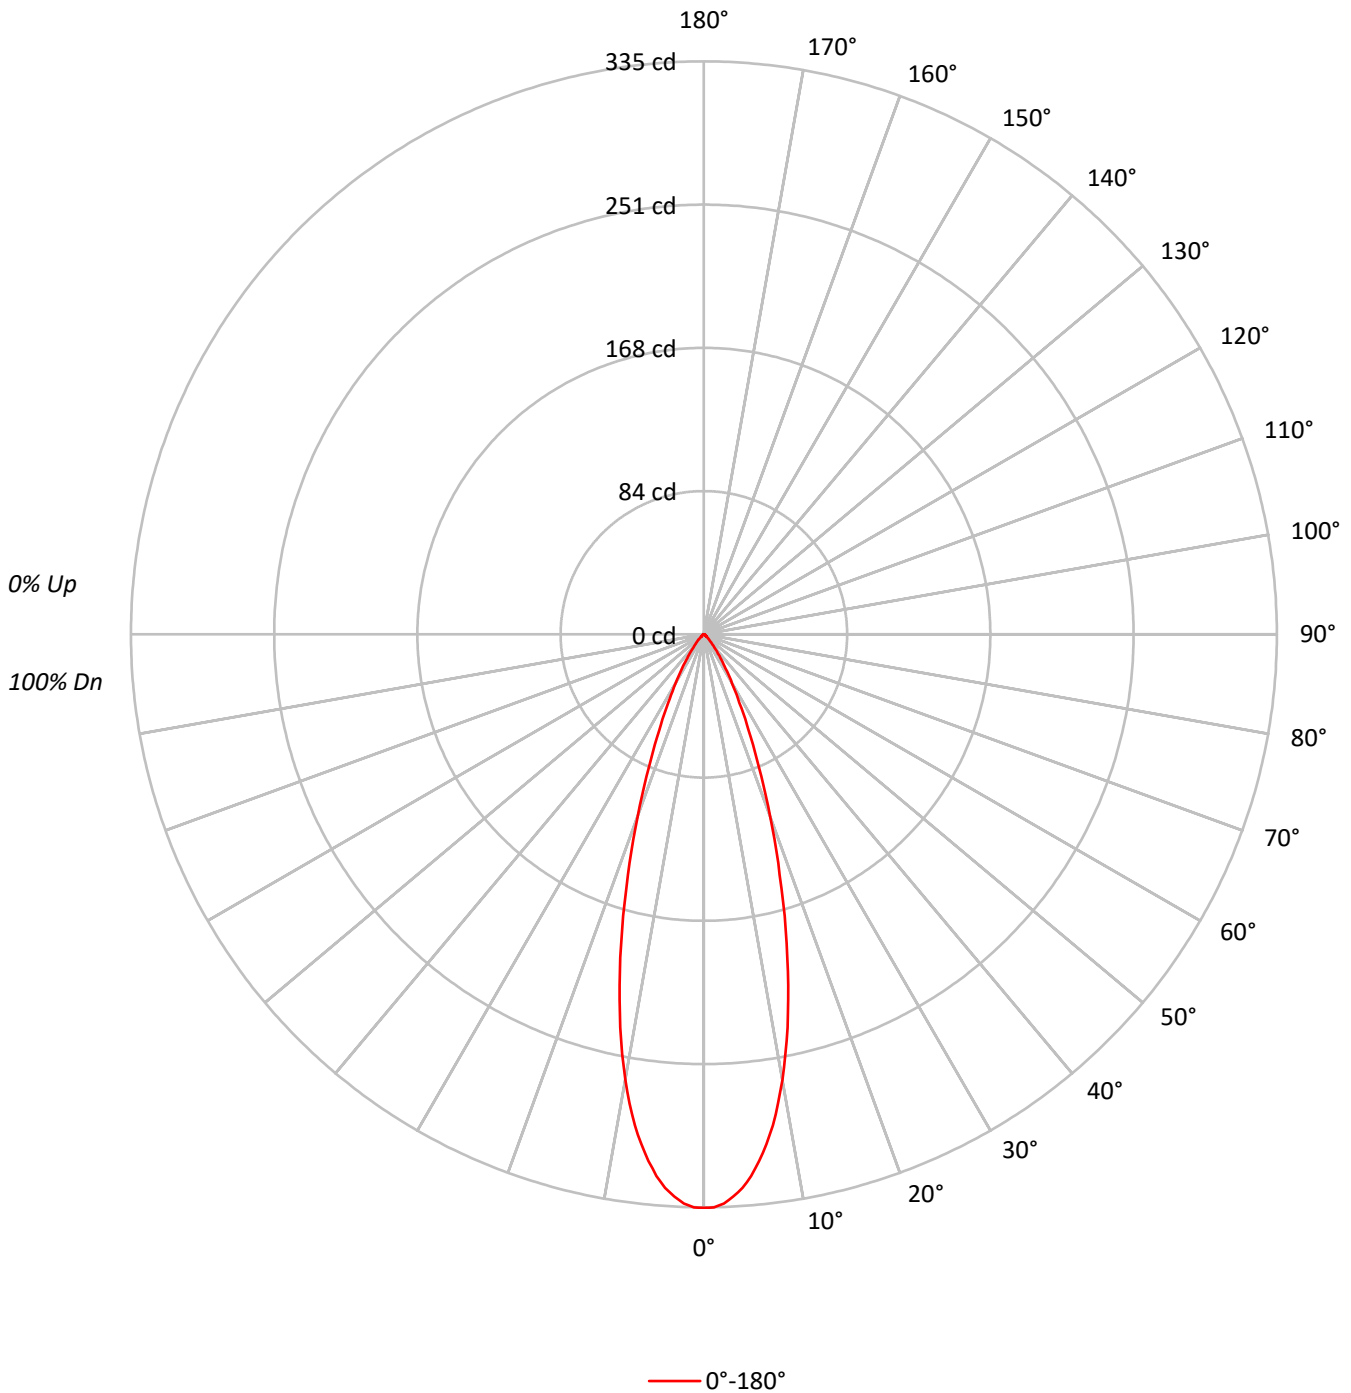



TEST NUMBER: P1250770

CATALOG NUMBER: P3AS02R309030DE010 E3DL1GPH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95	95	95	95
2	110	105	102	99	107	104	101	98	101	98	96	98	96	94	95	93	92	90	90	90	90
3	105	100	96	92	103	98	95	91	96	93	90	94	91	89	91	89	87	86	86	86	86
4	101	95	90	87	99	94	89	86	92	88	85	90	87	84	88	85	83	82	82	82	82
5	97	90	85	82	96	89	85	81	88	84	81	86	83	80	85	82	79	78	78	78	78
6	94	86	81	78	92	85	81	77	84	80	77	83	79	76	81	78	76	75	75	75	75
7	90	82	77	74	89	82	77	74	81	76	73	80	76	73	79	75	73	71	71	71	71
8	87	79	74	71	86	79	74	71	78	73	70	77	73	70	76	72	70	69	69	69	69
9	84	76	71	68	83	75	71	68	75	70	67	74	70	67	73	70	67	66	66	66	66
10	81	73	68	65	80	73	68	65	72	68	65	71	67	65	71	67	65	63	63	63	63

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	73525
5°	69976
10°	58872
15°	42452
20°	26322
25°	14977
30°	8330
35°	4524
40°	2376
45°	1302
50°	682
55°	459
60°	439
65°	415
70°	385
75°	339
80°	253
85°	252

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 1302 cd/sqm



TEST NUMBER: P1250770  
 CATALOG NUMBER: P3AS02R309030DE010 E3DL1GPH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	28.6	22.7
10°-20°	50.9	40.4
20°-30°	29.4	23.3
30°-40°	11.2	8.9
40°-50°	3.4	2.7
50°-60°	1.2	0.9
60°-70°	0.8	0.6
70°-80°	0.4	0.4
80°-90°	0.1	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	108.9	86.4
0°-40°	120.1	95.3
0°-60°	124.7	98.9
0°-90°	126.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	126.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	335	
5°	318	29
15°	187	51
25°	62	29
35°	17	11
45°	4	3
55°	1	1
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P1250770  
CATALOG NUMBER: P3AS02R309030DE010 E3DL1GPH

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	335.3
1°	335.1
2°	333.0
3°	329.2
4°	324.5
5°	317.9
6°	309.6
7°	300.3
8°	290.0
9°	277.6
10°	264.4
11°	250.1
12°	235.0
13°	219.1
14°	203.1
15°	187.0
17.5°	147.5
20°	112.8
22.5°	83.7
25°	61.9
27.5°	45.0
30°	32.9
32.5°	23.7
35°	16.9
37.5°	11.8
40°	8.3
42.5°	5.8
45°	4.2
47.5°	2.9
50°	2.0
52.5°	1.4
55°	1.2
57.5°	1.1
60°	1.0
62.5°	0.8
65°	0.8
67.5°	0.7
70°	0.6
72.5°	0.5
75°	0.4
77.5°	0.4
80°	0.2
82.5°	0.2
85°	0.1
87.5°	0.0



TEST NUMBER: P1250770  
CATALOG NUMBER: P3AS02R309030DE010 E3DL1GPH

CANDELA DISTRIBUTION (continued):

0°  
90° | 0.0

(END OF REPORT)