

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1250784

Luminaire Tested: P3AS02R309030DE010 E3DLP1LI

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1250784
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-13)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS02R309030DE010 E3DLP1LI
Description: 3in Adjustable LED luminaire with, R30 optic, 3000K CCT AND, 90CRI , E3DLP1LI TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 157.0 lumens
Efficiency: N/A
Efficacy: 43.6 lumens/watt
Spacing Criteria (0/90/45): 0.66 / 0.66 / 0.7
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 3.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1250784

CATALOG NUMBER: P3AS02R309030DE010 E3DLP1LI

Luminous Intensity Polar Plot

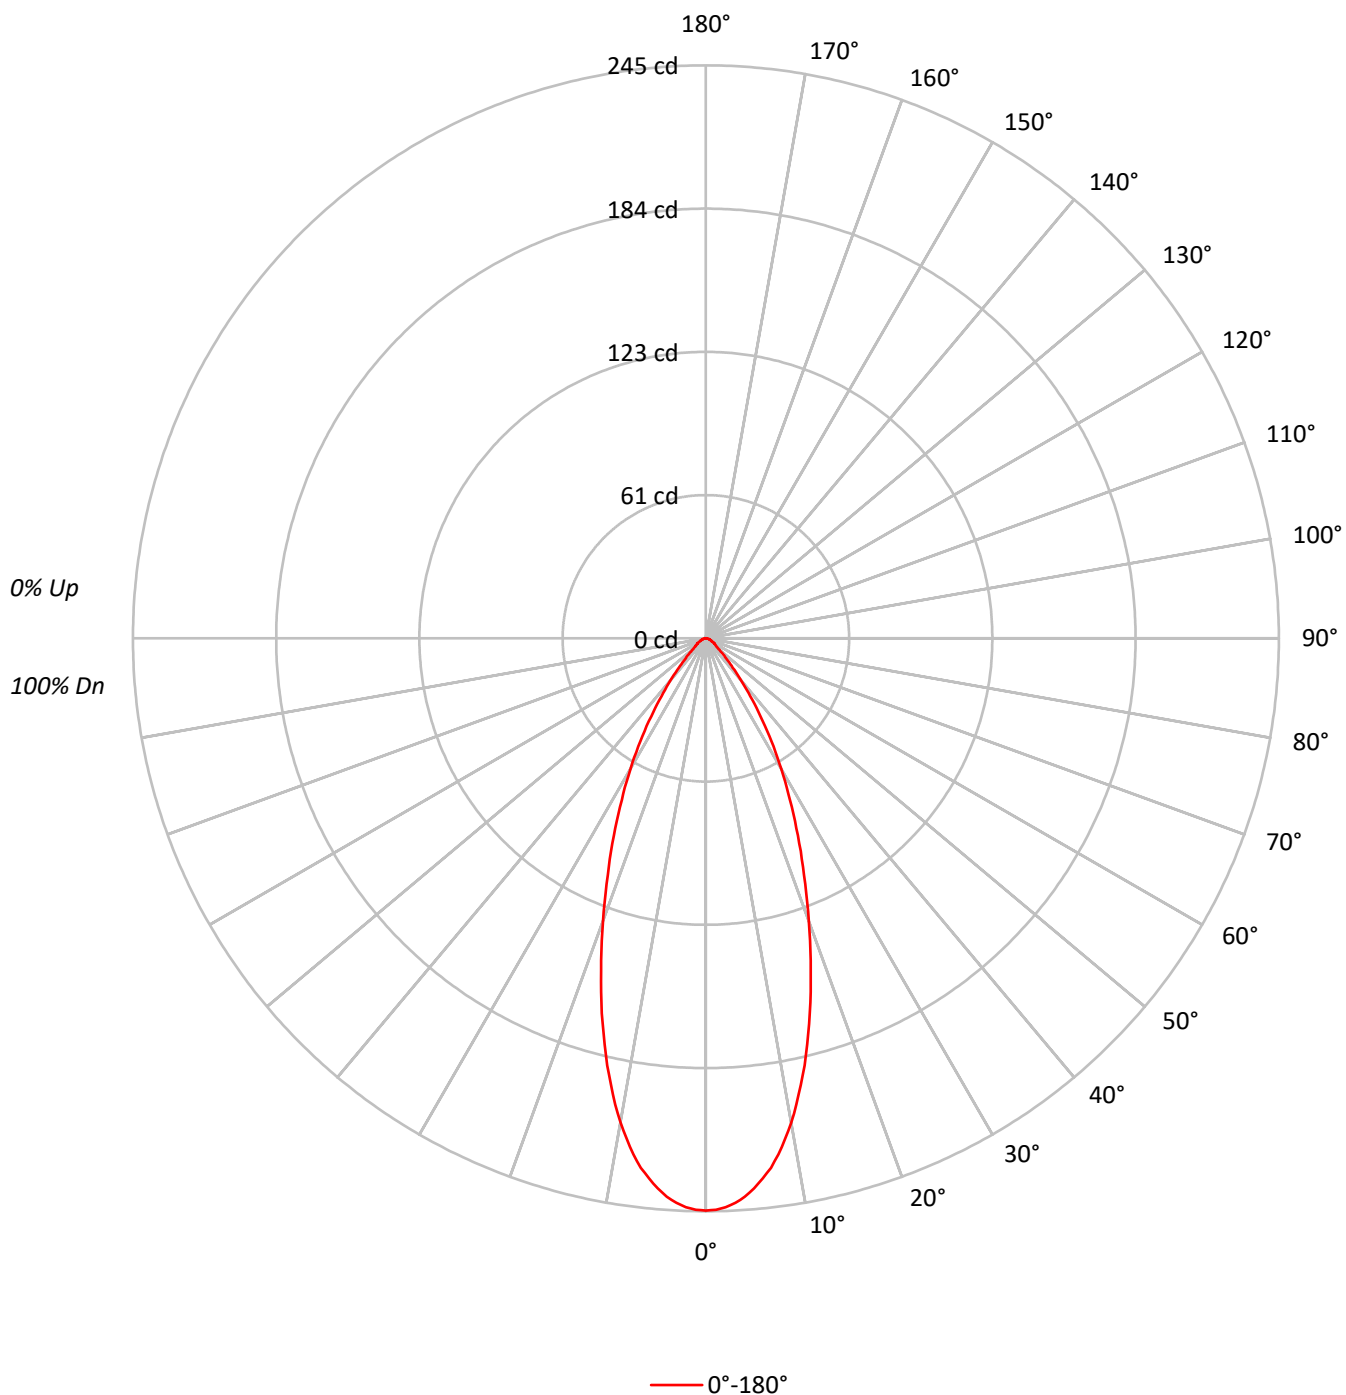

TEST NUMBER: P1250784

CATALOG NUMBER: P3AS02R309030DE010 E3DLP1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	108	105	111	108	106	104	104	102	100		100	99	97		97
2	107	102	98	95	105	101	97	94	97	94	92		94	92	90		92
3	102	95	90	86	100	94	89	85	91	87	84		89	86	83		87
4	97	89	84	79	95	88	83	79	86	81	78		84	80	77		82
5	92	84	78	73	90	83	77	73	81	76	72		79	75	72		78
6	88	79	73	68	86	78	72	68	76	71	68		75	71	67		74
7	83	74	68	64	82	74	68	64	72	67	63		71	67	63		70
8	80	70	64	60	78	70	64	60	69	63	60		67	63	60		67
9	76	67	61	57	75	66	60	57	65	60	56		64	60	56		63
10	73	63	58	54	72	63	57	54	62	57	53		61	57	53		60

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	53658
5°	51970
10°	46826
15°	38752
20°	29986
25°	22501
30°	16332
35°	10895
40°	6698
45°	3938
50°	2422
55°	1950
60°	1710
65°	1401
70°	1218
75°	1271
80°	884
85°	1258

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 3938 cd/sqm

TEST NUMBER: P1250784

CATALOG NUMBER: P3AS02R309030DE010 E3DLP1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	21.7	13.8
10°-20°	47.0	29.9
20°-30°	42.8	27.2
30°-40°	25.9	16.5
40°-50°	10.4	6.6
50°-60°	4.6	2.9
60°-70°	2.8	1.8
70°-80°	1.5	1.0
80°-90°	0.4	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	111.5	71.0
0°-40°	137.4	87.5
0°-60°	152.3	97.0
0°-90°	157.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	157.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	245	
5°	236	22
15°	171	47
25°	93	43
35°	41	26
45°	13	10
55°	5	5
65°	3	3
75°	2	2
85°	0	0
90°	0	

TEST NUMBER: P1250784

CATALOG NUMBER: P3AS02R309030DE010 E3DLP1LI

CANDELA DISTRIBUTION (FULL):

0°	
0°	244.7
1°	244.4
2°	243.4
3°	241.7
4°	239.3
5°	236.1
6°	232.2
7°	228.1
8°	222.8
9°	216.7
10°	210.3
11°	203.0
12°	195.2
13°	187.5
14°	178.9
15°	170.7
17.5°	149.0
20°	128.5
22.5°	109.6
25°	93.0
27.5°	77.9
30°	64.5
32.5°	52.1
35°	40.7
37.5°	31.2
40°	23.4
42.5°	17.0
45°	12.7
47.5°	9.5
50°	7.1
52.5°	5.6
55°	5.1
57.5°	4.4
60°	3.9
62.5°	3.2
65°	2.7
67.5°	2.4
70°	1.9
72.5°	1.7
75°	1.5
77.5°	1.2
80°	0.7
82.5°	0.5
85°	0.5
87.5°	0.2



TEST NUMBER: P1250784

CATALOG NUMBER: P3AS02R309030DE010 E3DLP1LI

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)