

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1250814

Luminaire Tested: P3AS02R359030DE010 E3DLP1WH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1250814
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-19)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS02R359030DE010 E3DLP1WH
Description: 3in Adjustable LED luminaire with, R35 optic, 3000K CCT AND, 90CRI , E3DLP1WH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 256.0 lumens
Efficiency: N/A
Efficacy: 71.1 lumens/watt
Spacing Criteria (0/90/45): 0.58 / 0.58 / 0.58
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 3.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1250814

CATALOG NUMBER: P3AS02R359030DE010 E3DLP1WH

Luminous Intensity Polar Plot

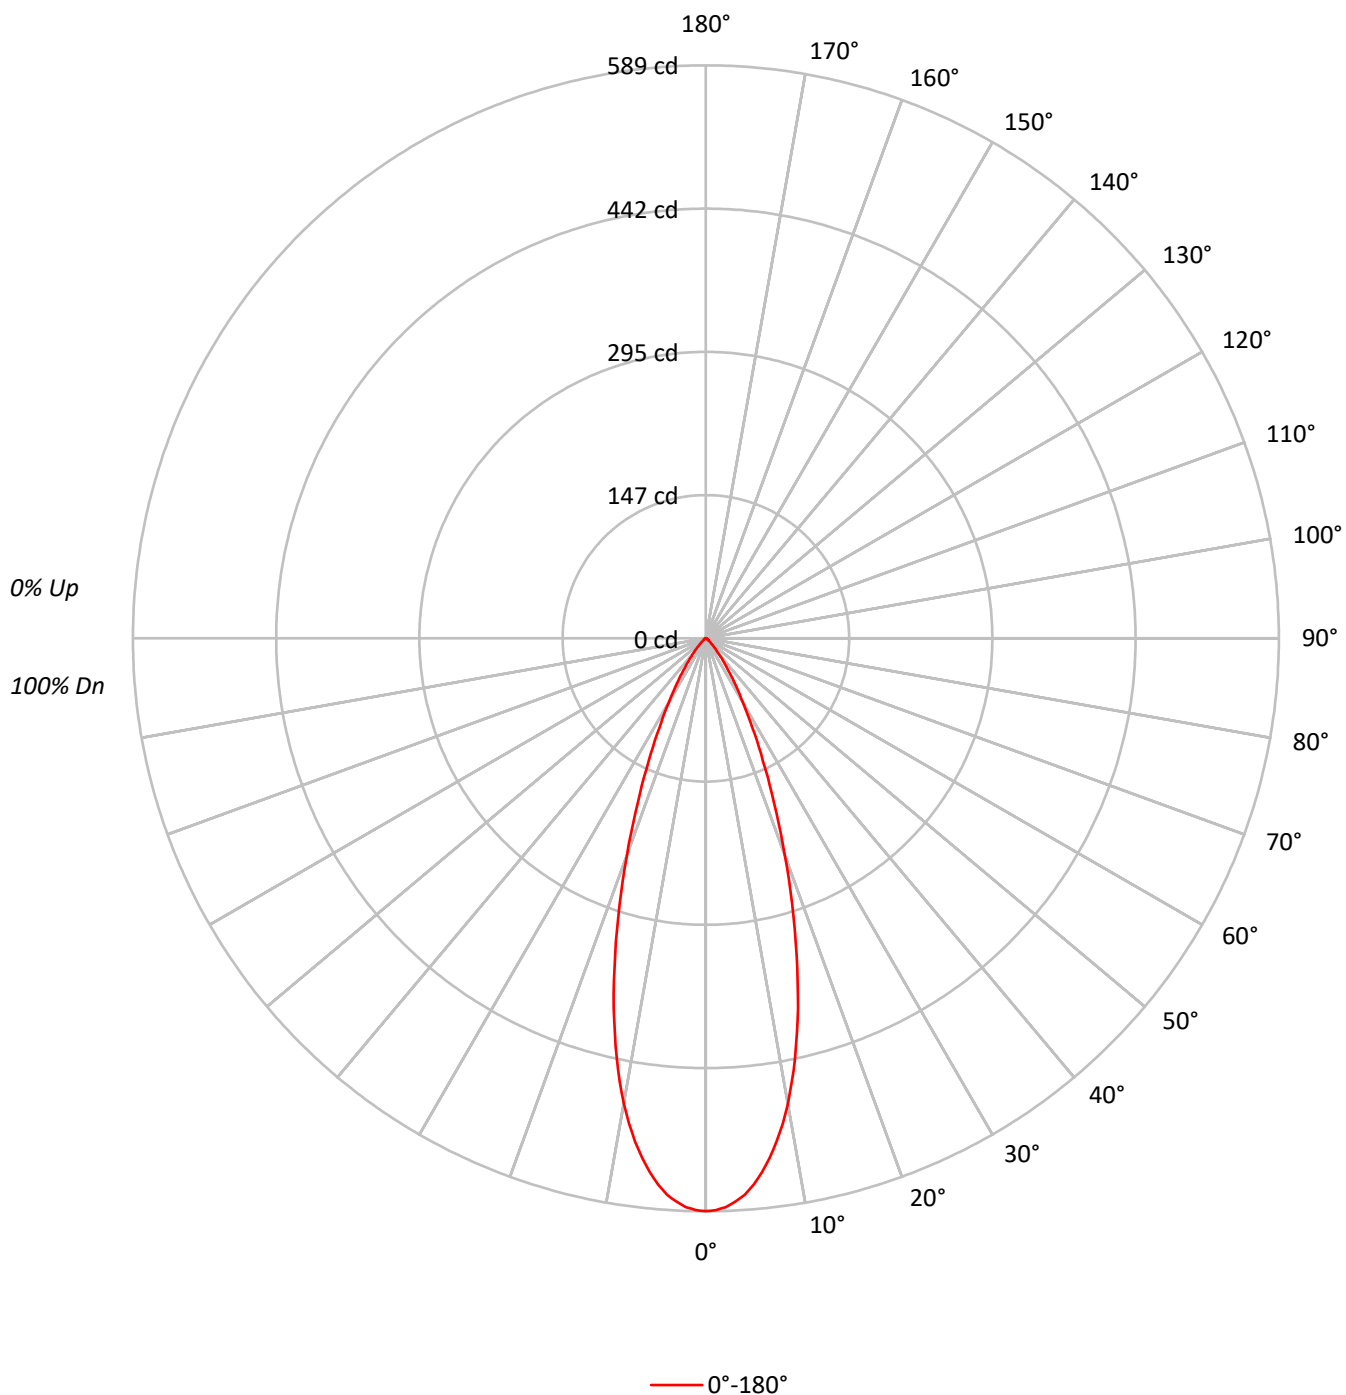

TEST NUMBER: P1250814

CATALOG NUMBER: P3AS02R359030DE010 E3DLP1WH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	112	109	107	112	109	107	106	105	104	102		102	100	99		98
2	109	105	101	98	107	103	100	97	100	97	95		97	95	93		94
3	105	99	95	91	103	98	94	90	95	92	89		93	90	88		91
4	100	94	89	85	99	93	88	85	91	87	84		89	85	83		87
5	96	89	84	80	95	88	83	80	86	82	79		85	81	78		83
6	92	85	80	76	91	84	79	76	83	78	75		81	77	75		80
7	89	81	76	72	88	80	75	72	79	75	71		78	74	71		77
8	85	77	72	69	84	77	72	69	76	71	68		75	71	68		74
9	82	74	69	66	81	74	69	65	73	68	65		72	68	65		71
10	79	71	66	63	78	71	66	63	70	66	63		69	65	62		69

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	129112
5°	124081
10°	108125
15°	82815
20°	55398
25°	33534
30°	19243
35°	10761
40°	5725
45°	2946
50°	1399
55°	1109
60°	1053
65°	882
70°	962
75°	847
80°	884
85°	503

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2946 cd/sqm

TEST NUMBER: P1250814

CATALOG NUMBER: P3AS02R359030DE010 E3DLP1WH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	51.3	20.0
10°-20°	99.4	38.8
20°-30°	65.1	25.4
30°-40°	26.4	10.3
40°-50°	7.9	3.1
50°-60°	2.7	1.1
60°-70°	1.8	0.7
70°-80°	1.1	0.4
80°-90°	0.3	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	215.8	84.3
0°-40°	242.2	94.6
0°-60°	252.8	98.7
0°-90°	256.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	256.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	589	
5°	564	51
15°	365	99
25°	139	65
35°	40	26
45°	10	8
55°	3	3
65°	2	2
75°	1	1
85°	0	0
90°	0	

TEST NUMBER: P1250814

CATALOG NUMBER: P3AS02R359030DE010 E3DLP1WH

CANDELA DISTRIBUTION (FULL):

0°	
0°	588.8
1°	587.8
2°	585.2
3°	579.8
4°	573.5
5°	563.7
6°	551.6
7°	537.9
8°	522.6
9°	505.0
10°	485.6
11°	463.9
12°	441.2
13°	415.9
14°	391.8
15°	364.8
17.5°	299.3
20°	237.4
22.5°	182.6
25°	138.6
27.5°	103.2
30°	76.0
32.5°	55.8
35°	40.2
37.5°	28.5
40°	20.0
42.5°	13.9
45°	9.5
47.5°	6.3
50°	4.1
52.5°	3.2
55°	2.9
57.5°	2.7
60°	2.4
62.5°	2.2
65°	1.7
67.5°	1.5
70°	1.5
72.5°	1.2
75°	1.0
77.5°	0.7
80°	0.7
82.5°	0.5
85°	0.2
87.5°	0.2



TEST NUMBER: P1250814

CATALOG NUMBER: P3AS02R359030DE010 E3DLP1WH

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)