

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1250976

Luminaire Tested: P3AS02R659030DE010 E3DL1WMH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1250976
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-43)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS02R659030DE010 E3DL1WMH
Description: 3in Adjustable LED luminaire with, R65 optic, 3000K CCT AND, 90CRI , E3DL1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 244.0 lumens
Efficiency: N/A
Efficacy: 67.8 lumens/watt
Spacing Criteria (0/90/45): 0.88 / 0.88 / 0.88
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 3.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1250976

CATALOG NUMBER: P3AS02R659030DE010 E3DL1WMH

Luminous Intensity Polar Plot

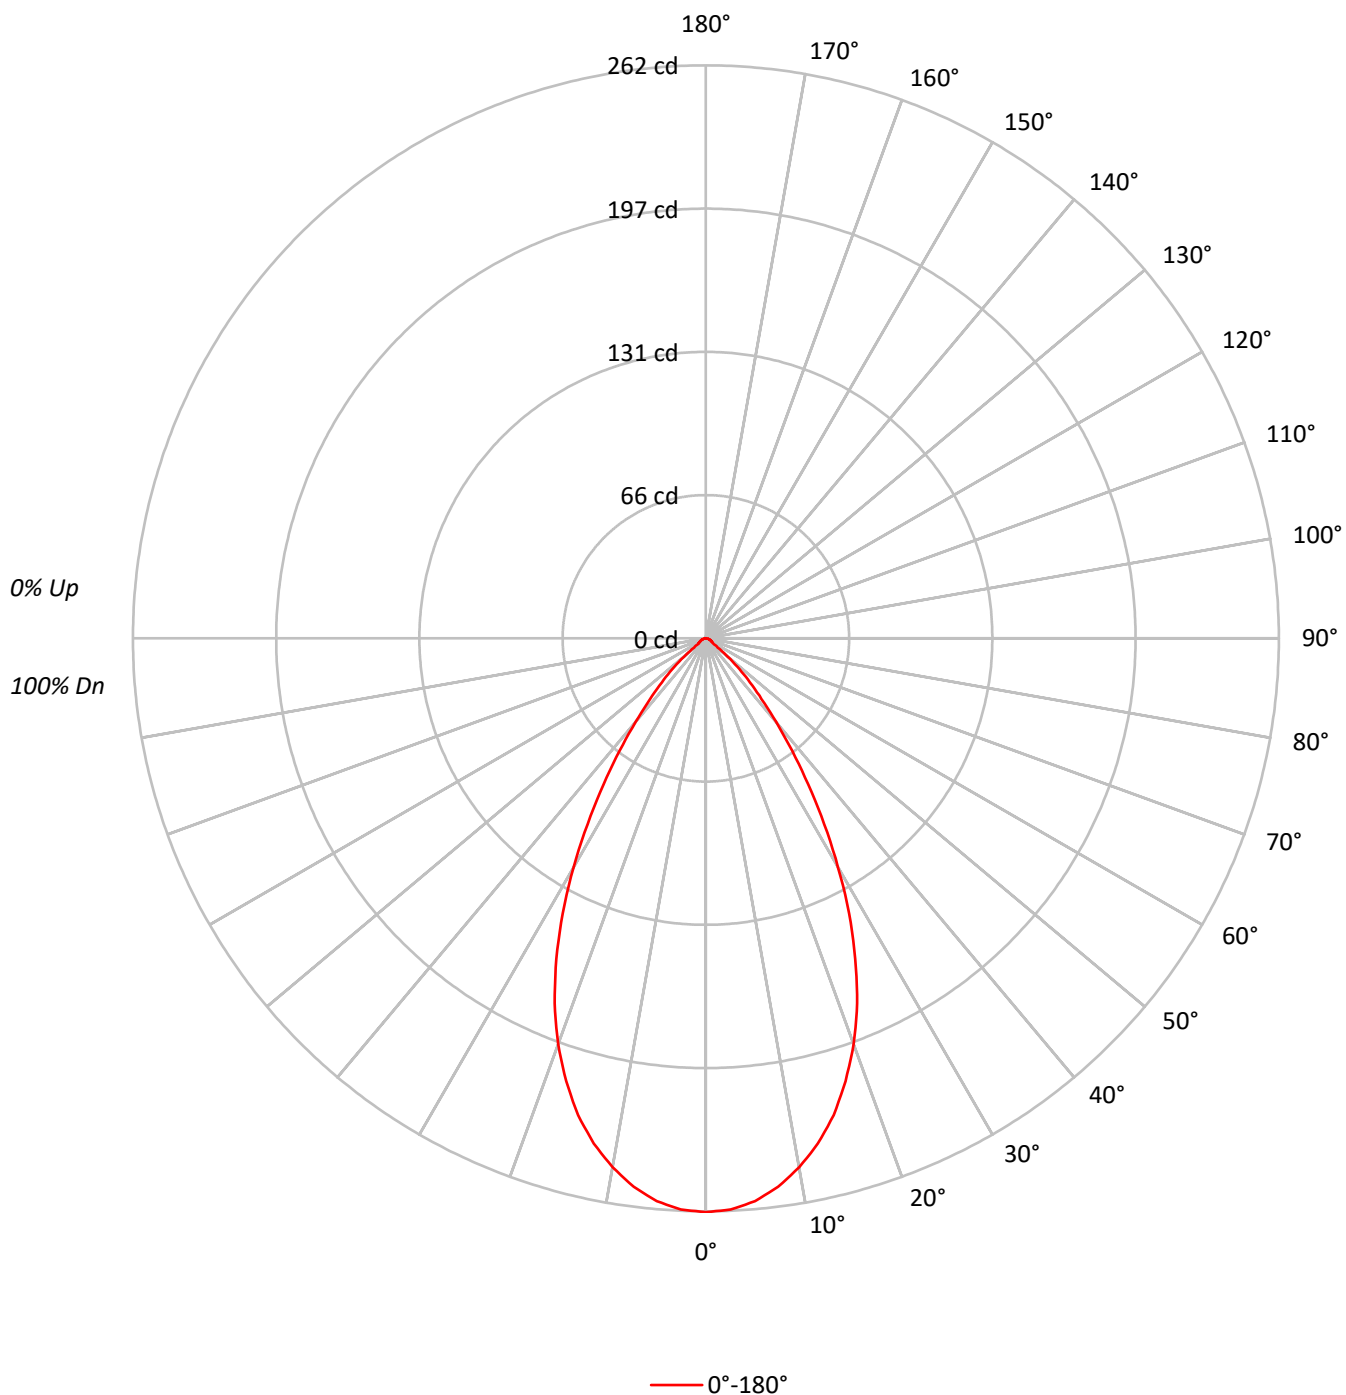

TEST NUMBER: P1250976

CATALOG NUMBER: P3AS02R659030DE010 E3DL1WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				0
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		0
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		100
1	113	110	107	105	111	108	106	103	104	102	100		100	99	97		93
2	107	102	98	94	105	100	96	93	97	94	91		94	91	89		85
3	101	95	89	85	99	93	88	84	90	86	83		88	85	82		79
4	96	88	82	78	94	87	81	77	85	80	76		83	79	75		73
5	91	82	76	71	89	81	75	71	79	74	70		77	73	70		68
6	86	77	70	66	84	76	70	66	74	69	65		73	68	65		63
7	82	72	66	61	80	71	65	61	70	64	61		69	64	60		58
8	77	67	61	57	76	67	61	57	66	60	57		65	60	56		55
9	74	64	57	53	72	63	57	53	62	57	53		61	56	53		51
10	70	60	54	50	69	59	54	50	59	53	50		58	53	50		48

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	57539
5°	56857
10°	54686
15°	51238
20°	46087
25°	39123
30°	30612
35°	21817
40°	14284
45°	8838
50°	4469
55°	1567
60°	1403
65°	1401
70°	1218
75°	1271
80°	1263
85°	1258

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 8838 cd/sqm

TEST NUMBER: P1250976

CATALOG NUMBER: P3AS02R659030DE010 E3DL1WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	24.2	9.9
10°-20°	62.8	25.7
20°-30°	73.4	30.1
30°-40°	51.3	21.0
40°-50°	22.6	9.3
50°-60°	5.0	2.1
60°-70°	2.6	1.0
70°-80°	1.5	0.6
80°-90°	0.5	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	160.5	65.8
0°-40°	211.8	86.8
0°-60°	239.4	98.1
0°-90°	244.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	244.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	262	
5°	258	24
15°	226	63
25°	162	73
35°	82	51
45°	28	23
55°	4	5
65°	3	3
75°	2	2
85°	0	1
90°	0	

TEST NUMBER: P1250976

CATALOG NUMBER: P3AS02R659030DE010 E3DL1WMH

CANDELA DISTRIBUTION (FULL):

	0°
0°	262.4
2.5°	261.4
5°	258.3
7.5°	252.9
10°	245.6
12.5°	236.6
15°	225.7
17.5°	212.3
20°	197.5
22.5°	180.7
25°	161.7
27.5°	141.8
30°	120.9
32.5°	100.7
35°	81.5
37.5°	64.7
40°	49.9
42.5°	37.7
45°	28.5
47.5°	20.9
50°	13.1
52.5°	6.8
55°	4.1
57.5°	3.6
60°	3.2
62.5°	2.9
65°	2.7
67.5°	2.2
70°	1.9
72.5°	1.7
75°	1.5
77.5°	1.2
80°	1.0
82.5°	0.7
85°	0.5
87.5°	0.2
90°	0.0

(END OF REPORT)