

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1251018

Luminaire Tested: P3AS05R109030DE010 E3B1WMH

Issue Date: 1/30/2026

**Test Information**

Test Method: LM-79-2019  
Report Number: P1251018  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-19)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS05R109030DE010 E3B1WMH  
Description: 3in Adjustable LED luminaire with, R10 optic, 3000K CCT AND, 90CRI , E3B1WMH TRIM  
Light Source: -  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 557.0 lumens  
Efficiency: N/A  
Efficacy: 70.5 lumens/watt  
Spacing Criteria (0/90/45): 0.18 / 0.18 / 0.18  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct

Input Watts (W): 7.9  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1251018  
CATALOG NUMBER: P3AS05R109030DE010 E3B1WMH

### Luminous Intensity Polar Plot

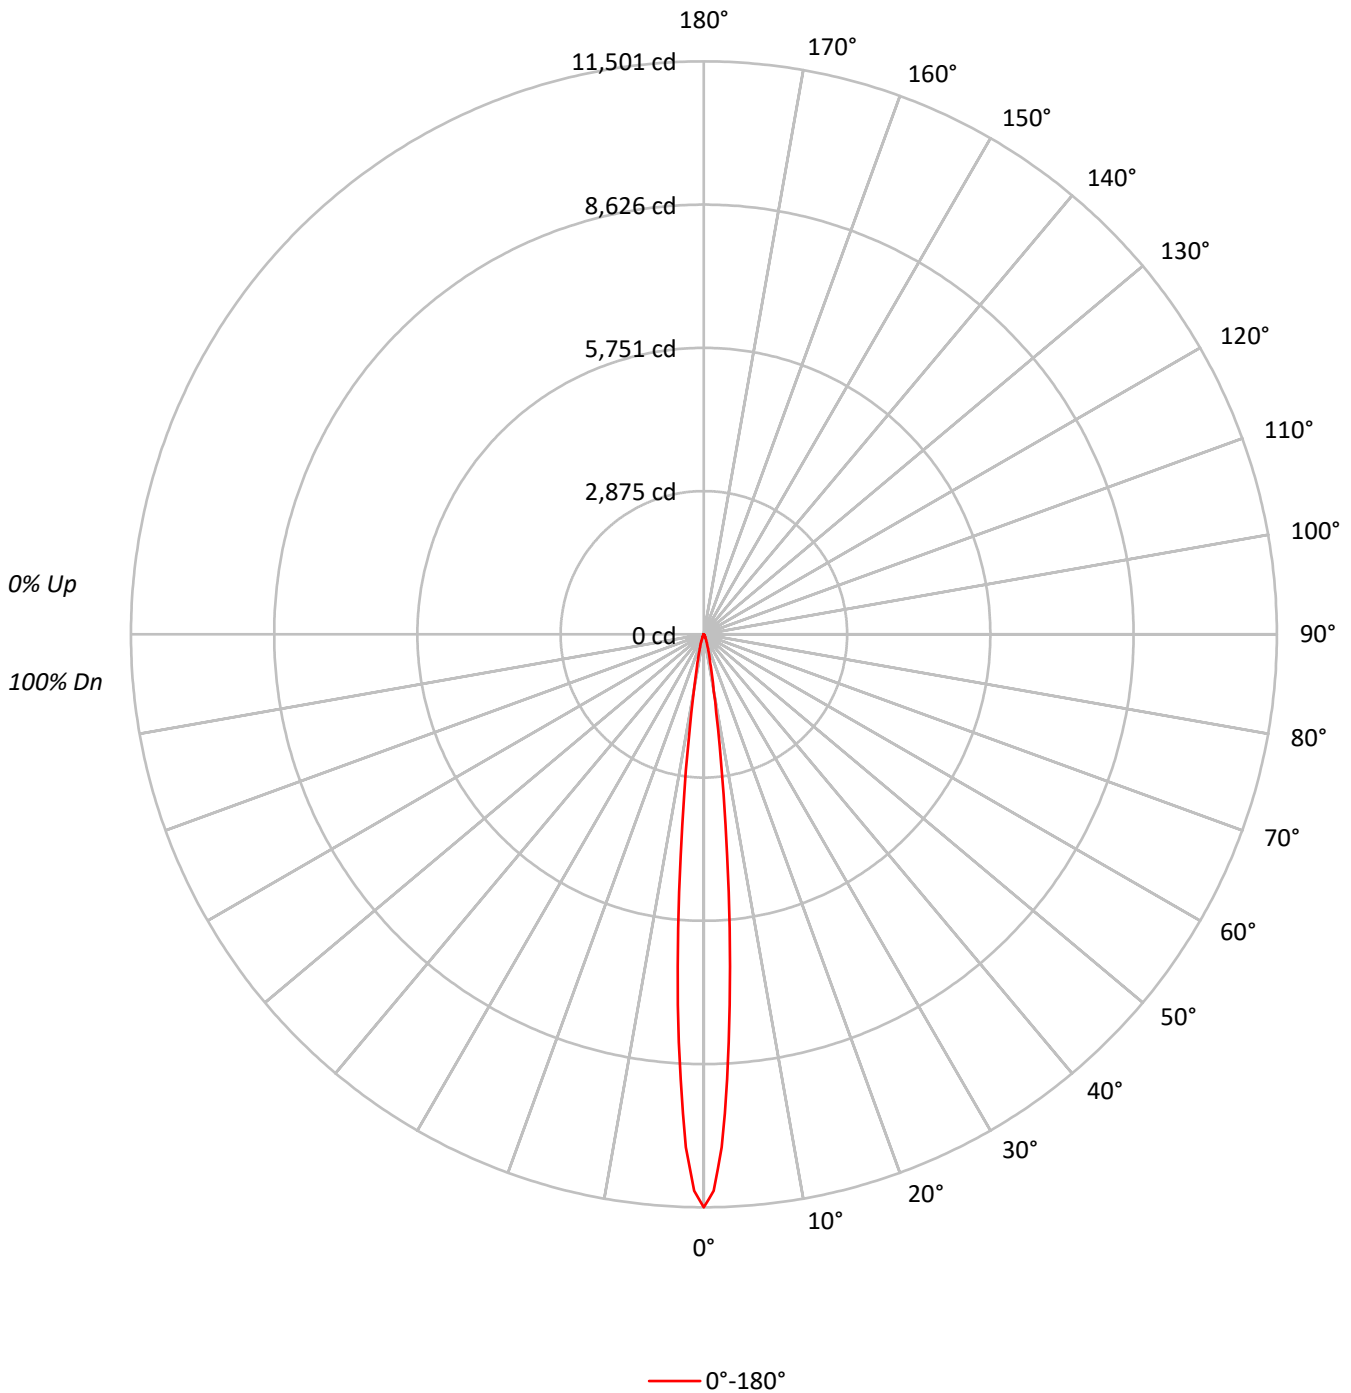



TEST NUMBER: P1251018  
 CATALOG NUMBER: P3AS05R109030DE010 E3B1WMH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| RF  | 20  |     |     |     | 20  |     |     |     | 20  |     |     |     | 20  |     |     |     | 20  |     |     |     |     |
| RC  | 80  |     |     |     | 70  |     |     |     | 50  |     |     |     | 30  |     |     |     | 10  |     |     | 0   |     |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 0   |
| RCR |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 | 100 | 100 | 100 |
| 1   | 116 | 114 | 113 | 111 | 114 | 112 | 111 | 110 | 108 | 107 | 106 | 105 | 104 | 103 | 101 | 101 | 100 | 99  | 99  | 99  | 99  |
| 2   | 113 | 110 | 108 | 106 | 111 | 109 | 107 | 105 | 106 | 104 | 103 | 103 | 102 | 101 | 100 | 99  | 98  | 98  | 98  | 98  | 97  |
| 3   | 111 | 107 | 104 | 102 | 109 | 106 | 103 | 101 | 104 | 102 | 100 | 101 | 100 | 98  | 99  | 98  | 97  | 97  | 97  | 97  | 96  |
| 4   | 109 | 105 | 102 | 99  | 107 | 104 | 101 | 99  | 102 | 99  | 98  | 100 | 98  | 97  | 98  | 97  | 96  | 96  | 96  | 96  | 95  |
| 5   | 107 | 102 | 99  | 97  | 105 | 101 | 99  | 97  | 100 | 98  | 96  | 99  | 97  | 95  | 97  | 96  | 94  | 94  | 94  | 94  | 93  |
| 6   | 105 | 100 | 97  | 95  | 104 | 100 | 97  | 95  | 98  | 96  | 94  | 97  | 95  | 94  | 96  | 95  | 93  | 93  | 93  | 93  | 92  |
| 7   | 103 | 99  | 96  | 93  | 102 | 98  | 95  | 93  | 97  | 95  | 93  | 96  | 94  | 92  | 95  | 93  | 92  | 92  | 92  | 92  | 91  |
| 8   | 102 | 97  | 94  | 92  | 101 | 97  | 94  | 92  | 96  | 93  | 92  | 95  | 93  | 91  | 94  | 92  | 91  | 91  | 91  | 91  | 90  |
| 9   | 100 | 96  | 93  | 91  | 100 | 95  | 93  | 91  | 95  | 92  | 90  | 94  | 92  | 90  | 93  | 91  | 90  | 90  | 90  | 90  | 89  |
| 10  | 99  | 94  | 92  | 90  | 98  | 94  | 91  | 90  | 94  | 91  | 89  | 93  | 91  | 89  | 92  | 91  | 89  | 89  | 89  | 89  | 88  |

**AVERAGE LUMINANCE (cd/sqm):**

|     |         |
|-----|---------|
|     | 0°      |
| 0°  | 2521991 |
| 5°  | 1302858 |
| 10° | 256041  |
| 15° | 80613   |
| 20° | 35213   |
| 25° | 15582   |
| 30° | 8381    |
| 35° | 4444    |
| 40° | 1574    |
| 45° | 558     |
| 50° | 0       |
| 55° | 0       |
| 60° | 0       |
| 65° | 0       |
| 70° | 0       |
| 75° | 0       |
| 80° | 0       |
| 85° | 0       |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 47.5°  
 Luminance: 584 cd/sqm



TEST NUMBER: P1251018  
 CATALOG NUMBER: P3AS05R109030DE010 E3B1WMH

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 398.2  | 71.5      |
| 10°-20°   | 113.2  | 20.3      |
| 20°-30°   | 33.0   | 5.9       |
| 30°-40°   | 10.8   | 1.9       |
| 40°-50°   | 1.9    | 0.3       |
| 50°-60°   | 0.0    | 0.0       |
| 60°-70°   | 0.0    | 0.0       |
| 70°-80°   | 0.0    | 0.0       |
| 80°-90°   | 0.0    | 0.0       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| 0°-30°    | 544.3  | 97.7      |
| 0°-40°    | 555.1  | 99.7      |
| 0°-60°    | 557.0  | 100.0     |
| 0°-90°    | 557.0  | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 557.0  | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°    | Flux |
|-----|-------|------|
| 0°  | 11501 |      |
| 5°  | 5919  | 398  |
| 15° | 355   | 113  |
| 25° | 64    | 33   |
| 35° | 17    | 11   |
| 45° | 2     | 2    |
| 55° | 0     | 0    |
| 65° | 0     | 0    |
| 75° | 0     | 0    |
| 85° | 0     | 0    |
| 90° | 0     |      |



TEST NUMBER: P1251018  
CATALOG NUMBER: P3AS05R109030DE010 E3B1WMH

**CANDELA DISTRIBUTION (FULL):**

| 0°    |         |
|-------|---------|
| 0°    | 11501.2 |
| 1°    | 11170.0 |
| 2°    | 10303.4 |
| 3°    | 8943.7  |
| 4°    | 7457.1  |
| 5°    | 5918.9  |
| 6°    | 4463.6  |
| 7°    | 3232.7  |
| 8°    | 2274.1  |
| 9°    | 1598.9  |
| 10°   | 1149.9  |
| 11°   | 851.9   |
| 12°   | 655.0   |
| 13°   | 526.2   |
| 14°   | 428.7   |
| 15°   | 355.1   |
| 17.5° | 235.5   |
| 20°   | 150.9   |
| 22.5° | 95.7    |
| 25°   | 64.4    |
| 27.5° | 46.0    |
| 30°   | 33.1    |
| 32.5° | 23.9    |
| 35°   | 16.6    |
| 37.5° | 11.0    |
| 40°   | 5.5     |
| 42.5° | 3.7     |
| 45°   | 1.8     |
| 47.5° | 1.8     |
| 50°   | 0.0     |
| 52.5° | 0.0     |
| 55°   | 0.0     |
| 57.5° | 0.0     |
| 60°   | 0.0     |
| 62.5° | 0.0     |
| 65°   | 0.0     |
| 67.5° | 0.0     |
| 70°   | 0.0     |
| 72.5° | 0.0     |
| 75°   | 0.0     |
| 77.5° | 0.0     |
| 80°   | 0.0     |
| 82.5° | 0.0     |
| 85°   | 0.0     |
| 87.5° | 0.0     |



TEST NUMBER: P1251018  
CATALOG NUMBER: P3AS05R109030DE010 E3B1WMH

CANDELA DISTRIBUTION (continued):

0°  
90° | 0.0

(END OF REPORT)