

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1251075

Luminaire Tested: P3AS05R129030DE010 E3PHLP1MW

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1251075
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2509-551-5)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R129030DE010 E3PHLP1MW
Description: 3in Adjustable LED luminaire with, R12 optic, 3000K CCT AND, 90CRI , E3PHLP1MW TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 262.0 lumens
Efficiency: N/A
Efficacy: 34.5 lumens/watt
Spacing Criteria (0/90/45): 0.51 / 0.51 / 0.6
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.6
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1251075
CATALOG NUMBER: P3AS05R129030DE010 E3PHLP1MW

Luminous Intensity Polar Plot

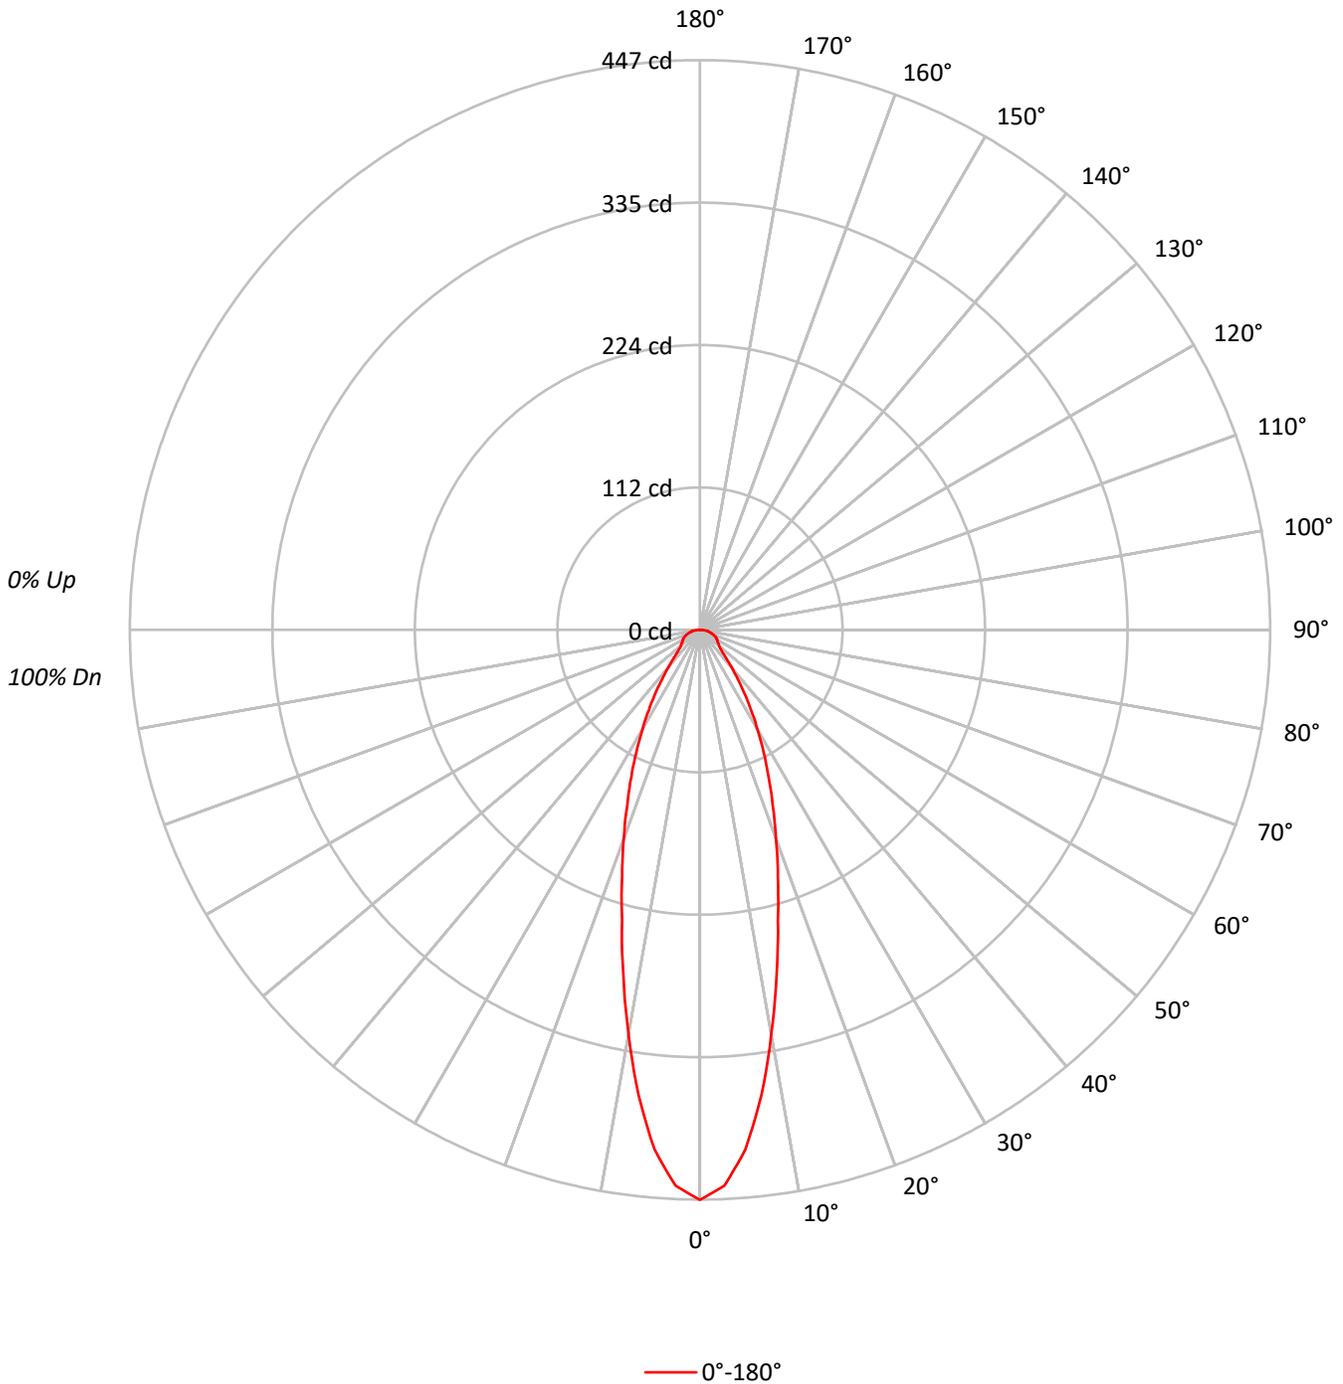



TEST NUMBER: P1251075
 CATALOG NUMBER: P3AS05R129030DE010 E3PHLP1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	102	102	102	100
1	112	108	105	102	109	106	103	100	102	99	97	98	96	94	95	93	92	95	93	92	90
2	105	99	94	90	102	97	92	89	94	90	87	91	87	85	88	85	83	88	85	83	81
3	99	91	85	80	96	89	84	80	87	82	78	84	80	77	82	79	76	82	79	76	74
4	93	84	78	73	91	83	77	72	81	76	71	79	74	71	77	73	70	77	73	70	68
5	88	78	72	67	86	77	71	67	76	70	66	74	69	65	72	68	65	72	68	65	63
6	83	73	67	62	82	73	66	62	71	65	61	70	65	61	68	64	60	68	64	60	59
7	79	69	62	58	78	68	62	58	67	61	57	66	61	57	65	60	57	65	60	57	55
8	75	65	59	54	74	65	58	54	63	58	54	62	57	54	61	57	53	61	57	53	52
9	72	62	55	51	71	61	55	51	60	55	51	59	54	51	58	54	50	58	54	50	49
10	69	59	52	48	68	58	52	48	57	52	48	56	51	48	56	51	48	56	51	48	46

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	98062
5°	90050
10°	71742
15°	53621
20°	40720
25°	30824
30°	22814
35°	16302
40°	11164
45°	7815
50°	6652
55°	6499
60°	6754
65°	7160
70°	7309
75°	7540
80°	8208
85°	8051

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 82.5°
 Luminance: 9576 cd/sqm



TEST NUMBER: P1251075
 CATALOG NUMBER: P3AS05R129030DE010 E3PHLP1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	36.2	13.8
10°-20°	66.2	25.3
20°-30°	58.7	22.4
30°-40°	38.5	14.7
40°-50°	20.5	7.8
50°-60°	15.5	5.9
60°-70°	13.4	5.1
70°-80°	9.2	3.5
80°-90°	3.7	1.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	161.2	61.5
0°-40°	199.6	76.2
0°-60°	235.7	90.0
0°-90°	262.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	262.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	447	
5°	409	36
15°	236	66
25°	127	59
35°	61	38
45°	25	21
55°	17	16
65°	14	13
75°	9	9
85°	3	4
90°	0	



TEST NUMBER: P1251075
CATALOG NUMBER: P3AS05R129030DE010 E3PHLP1MW

CANDELA DISTRIBUTION (FULL):

0°	
0°	447.2
2.5°	436.6
5°	409.1
7.5°	368.5
10°	322.2
12.5°	277.6
15°	236.2
17.5°	202.9
20°	174.5
22.5°	149.3
25°	127.4
27.5°	107.9
30°	90.1
32.5°	74.7
35°	60.9
37.5°	48.7
40°	39.0
42.5°	30.8
45°	25.2
47.5°	21.9
50°	19.5
52.5°	18.7
55°	17.0
57.5°	16.2
60°	15.4
62.5°	14.6
65°	13.8
67.5°	12.2
70°	11.4
72.5°	9.7
75°	8.9
77.5°	7.3
80°	6.5
82.5°	5.7
85°	3.2
87.5°	1.6
90°	0.0

(END OF REPORT)