

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1251145

Luminaire Tested: P3AS05R259030DE010 E3DL1GPH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1251145
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-11)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R259030DE010 E3DL1GPH
Description: 3in Adjustable LED luminaire with, R25 optic, 3000K CCT AND, 90CRI , E3DL1GPH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 257.0 lumens
Efficiency: N/A
Efficacy: 35.7 lumens/watt
Spacing Criteria (0/90/45): 0.49 / 0.49 / 0.51
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1251145
CATALOG NUMBER: P3AS05R259030DE010 E3DL1GPH

Luminous Intensity Polar Plot

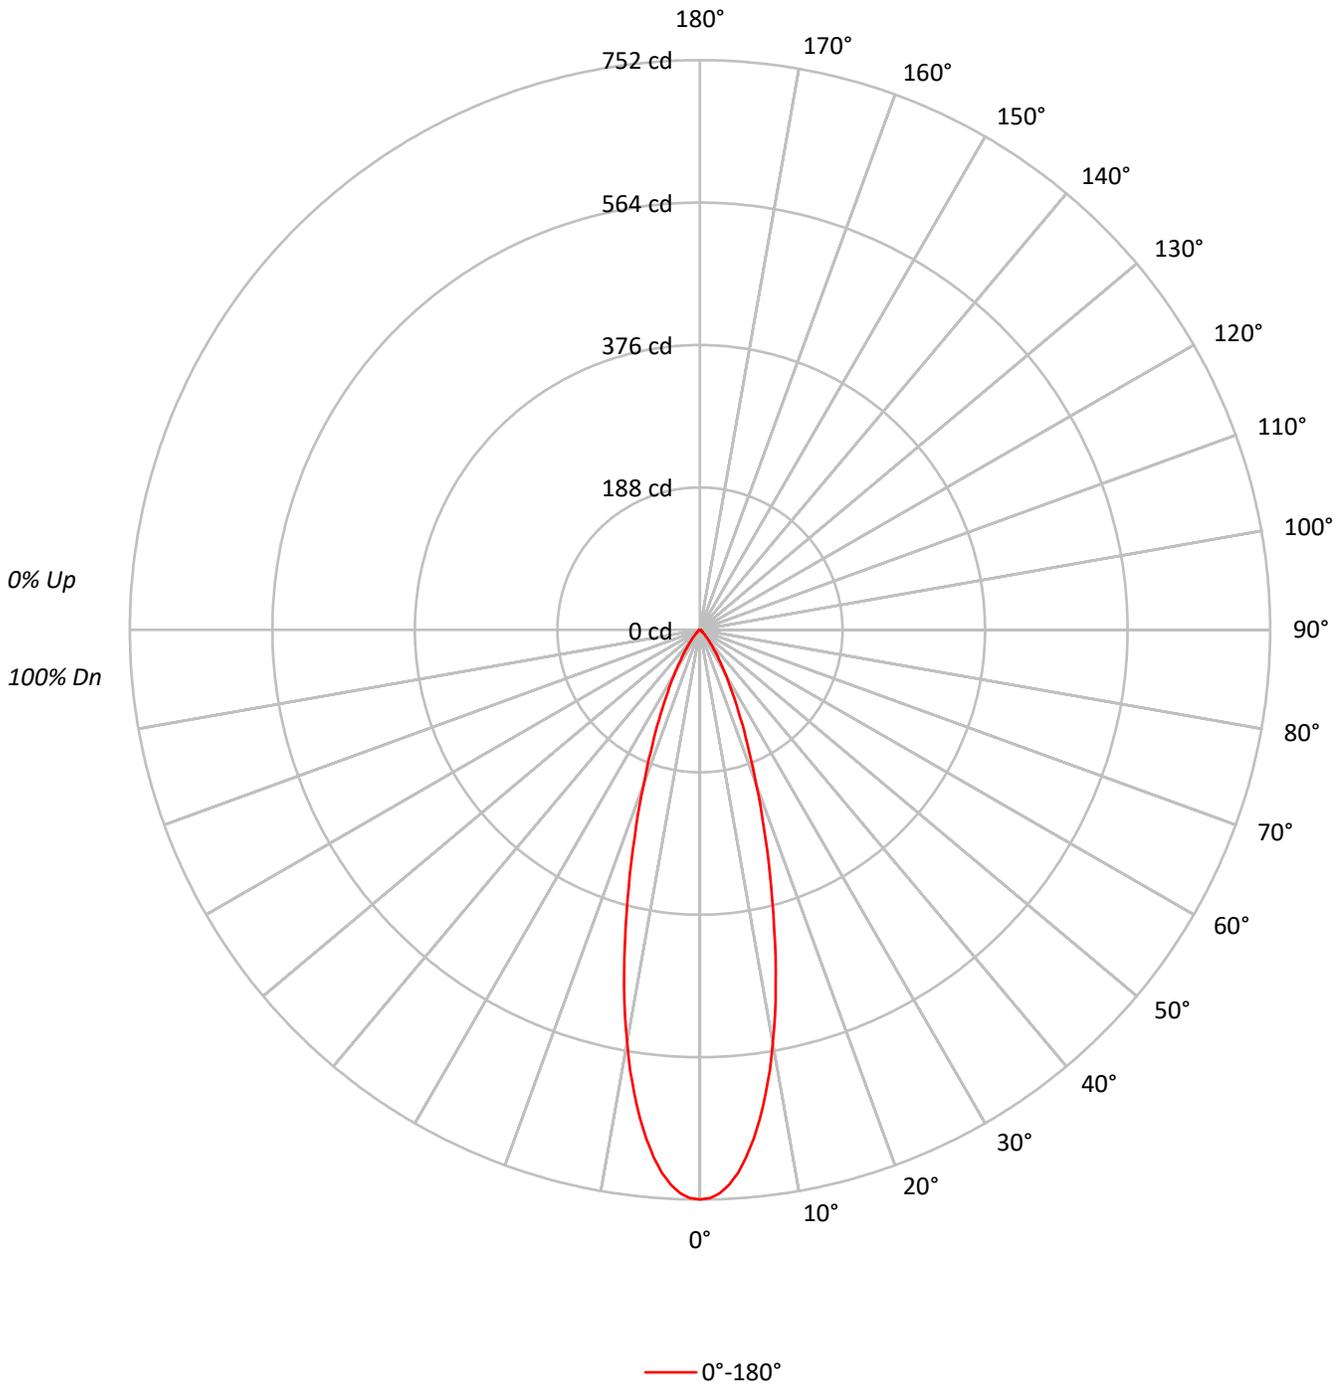



TEST NUMBER: P1251145
 CATALOG NUMBER: P3AS05R259030DE010 E3DL1GPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20					
RC	80				70				50				30				10			0		
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	99	98	97	100
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95	95	93	92	95
2	110	105	102	99	107	104	101	98	101	98	96	98	96	94	95	93	92	90	91	89	87	86
3	105	100	96	92	103	98	95	91	96	93	90	94	91	89	91	89	87	86	88	85	83	82
4	101	95	90	87	99	94	89	86	92	88	85	90	87	84	88	85	83	82	85	82	79	78
5	97	90	85	82	96	89	85	81	88	84	81	86	83	80	85	82	79	78	82	78	76	75
6	94	86	81	78	92	86	81	78	84	80	77	83	79	77	82	78	76	75	79	75	73	72
7	90	83	78	74	89	82	77	74	81	77	74	80	76	73	79	75	73	72	76	73	70	69
8	87	79	74	71	86	79	74	71	78	74	71	77	73	70	76	73	70	69	73	70	67	66
9	84	76	71	68	83	76	71	68	75	71	68	74	70	68	73	70	67	66	71	67	65	64
10	81	73	69	65	80	73	68	65	72	68	65	72	68	65	71	67	65	64				

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	164855
5°	153819
10°	123222
15°	83633
20°	50614
25°	29590
30°	16863
35°	9262
40°	4924
45°	2605
50°	1501
55°	1109
60°	965
65°	1038
70°	962
75°	847
80°	631
85°	503

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 2605 cd/sqm



TEST NUMBER: P1251145
 CATALOG NUMBER: P3AS05R259030DE010 E3DL1GPH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	62.0	24.1
10°-20°	101.3	39.4
20°-30°	57.9	22.5
30°-40°	22.8	8.9
40°-50°	7.0	2.7
50°-60°	2.7	1.1
60°-70°	1.9	0.7
70°-80°	1.0	0.4
80°-90°	0.3	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	221.2	86.1
0°-40°	244.0	95.0
0°-60°	253.8	98.8
0°-90°	257.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	257.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	752	
5°	699	62
15°	368	101
25°	122	58
35°	35	23
45°	8	7
55°	3	3
65°	2	2
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P1251145
CATALOG NUMBER: P3AS05R259030DE010 E3DL1GPH

CANDELA DISTRIBUTION (FULL):

0°	
0°	751.8
1°	750.3
2°	744.2
3°	733.4
4°	718.4
5°	698.8
6°	675.7
7°	649.6
8°	619.4
9°	588.5
10°	553.4
11°	518.7
12°	480.7
13°	443.1
14°	404.5
15°	368.4
17.5°	285.6
20°	216.9
22.5°	162.8
25°	122.3
27.5°	90.6
30°	66.6
32.5°	48.1
35°	34.6
37.5°	24.6
40°	17.2
42.5°	11.8
45°	8.4
47.5°	5.9
50°	4.4
52.5°	3.4
55°	2.9
57.5°	2.7
60°	2.2
62.5°	2.0
65°	2.0
67.5°	1.7
70°	1.5
72.5°	1.2
75°	1.0
77.5°	0.7
80°	0.5
82.5°	0.5
85°	0.2
87.5°	0.2



TEST NUMBER: P1251145
CATALOG NUMBER: P3AS05R259030DE010 E3DL1GPH

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)