

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1251299

Luminaire Tested: P3AS05R509030DE010 E3DLD1LI

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1251299
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-30)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R509030DE010 E3DLD1LI
Description: 3in Adjustable LED luminaire with, R50 optic, 3000K CCT AND, 90CRI , E3DLD1LI TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 438.9 lumens
Efficiency: N/A
Efficacy: 61.0 lumens/watt
Spacing Criteria (0/90/45): 0.88 / 0.88 / 0.93
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1251299

CATALOG NUMBER: P3AS05R509030DE010 E3DLD1LI

Luminous Intensity Polar Plot

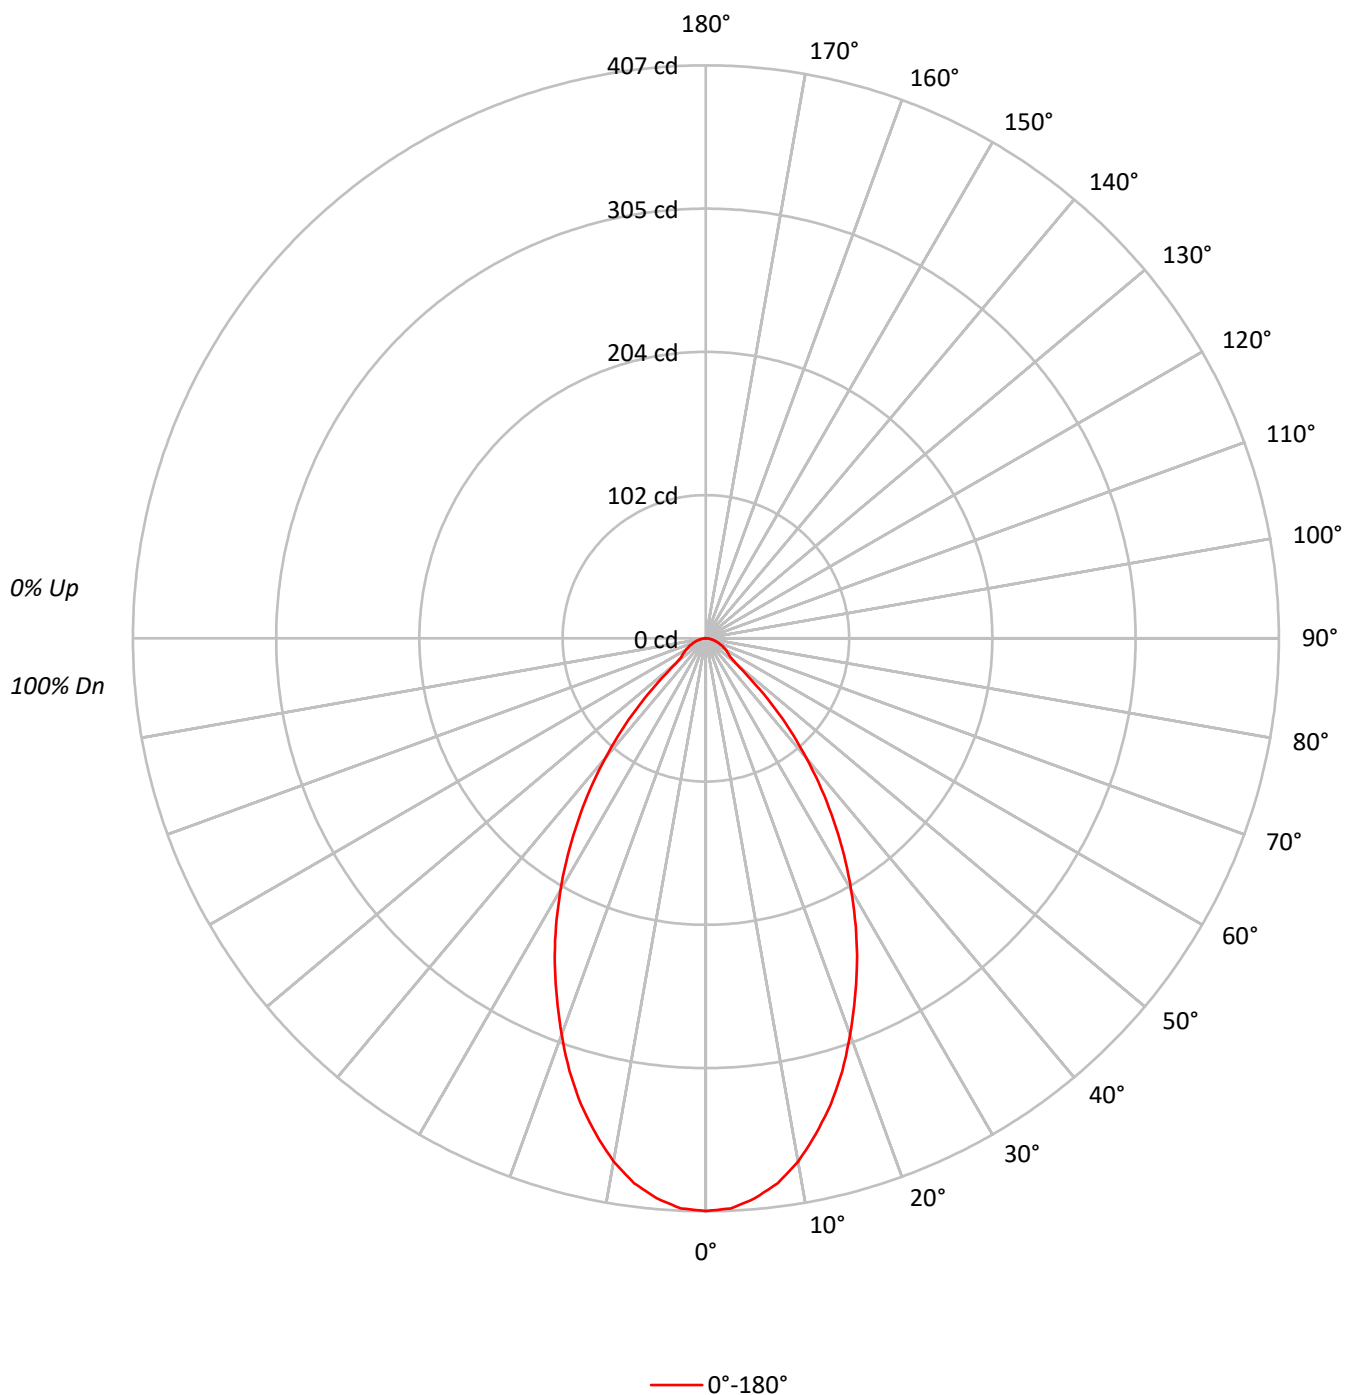

TEST NUMBER: P1251299

CATALOG NUMBER: P3AS05R509030DE010 E3DLD1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				0
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		0
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		100
1	112	109	106	103	110	107	104	102	103	101	99		99	97	96		91
2	106	100	95	91	103	98	94	90	95	91	88		92	89	86		83
3	99	92	86	81	97	90	85	81	88	83	79		85	81	78		75
4	93	85	78	73	91	83	77	73	81	76	72		79	75	71		69
5	88	78	72	67	86	77	71	66	75	70	66		74	69	65		63
6	83	73	66	61	81	72	65	61	70	65	60		69	64	60		58
7	78	68	61	56	77	67	61	56	66	60	56		64	59	55		53
8	74	63	57	52	73	63	56	52	61	56	52		60	55	51		50
9	70	59	53	48	69	59	52	48	58	52	48		57	52	48		46
10	66	56	49	45	65	55	49	45	54	49	45		54	48	45		43

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	89203
5°	87893
10°	84011
15°	77798
20°	69913
25°	61455
30°	52261
35°	42376
40°	31831
45°	20498
50°	9757
55°	7646
60°	7236
65°	6745
70°	6091
75°	5507
80°	5051
85°	5032

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 20498 cd/sqm

TEST NUMBER: P1251299

CATALOG NUMBER: P3AS05R509030DE010 E3DLD1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	37.4	8.5
10°-20°	95.5	21.8
20°-30°	116.1	26.4
30°-40°	98.5	22.4
40°-50°	51.1	11.7
50°-60°	18.4	4.2
60°-70°	12.7	2.9
70°-80°	6.9	1.6
80°-90°	2.2	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	249.1	56.7
0°-40°	347.5	79.2
0°-60°	417.1	95.0
0°-90°	438.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	438.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	407	
5°	399	37
15°	343	96
25°	254	116
35°	158	98
45°	66	51
55°	20	18
65°	13	13
75°	6	7
85°	2	2
90°	0	

TEST NUMBER: P1251299

CATALOG NUMBER: P3AS05R509030DE010 E3DLD1LI

CANDELA DISTRIBUTION (FULL):

	0°
0°	406.8
2.5°	405.3
5°	399.3
7.5°	390.3
10°	377.3
12.5°	360.7
15°	342.7
17.5°	322.2
20°	299.6
22.5°	276.6
25°	254.0
27.5°	230.5
30°	206.4
32.5°	182.4
35°	158.3
37.5°	134.8
40°	111.2
42.5°	88.7
45°	66.1
47.5°	44.1
50°	28.6
52.5°	22.0
55°	20.0
57.5°	18.0
60°	16.5
62.5°	14.5
65°	13.0
67.5°	11.0
70°	9.5
72.5°	8.0
75°	6.5
77.5°	5.0
80°	4.0
82.5°	3.0
85°	2.0
87.5°	1.0
90°	0.0

(END OF REPORT)