

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1251345

Luminaire Tested: P3AS05R609030DE010 E3D1LI

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1251345
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-15)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R609030DE010 E3D1LI
Description: 3in Adjustable LED luminaire with, R60 optic, 3000K CCT AND, 90CRI , E3D1LI TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 599.9 lumens
Efficiency: N/A
Efficacy: 83.3 lumens/watt
Spacing Criteria (0/90/45): 0.94 / 0.94 / 0.88
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1251345

CATALOG NUMBER: P3AS05R609030DE010 E3D1LI

Luminous Intensity Polar Plot

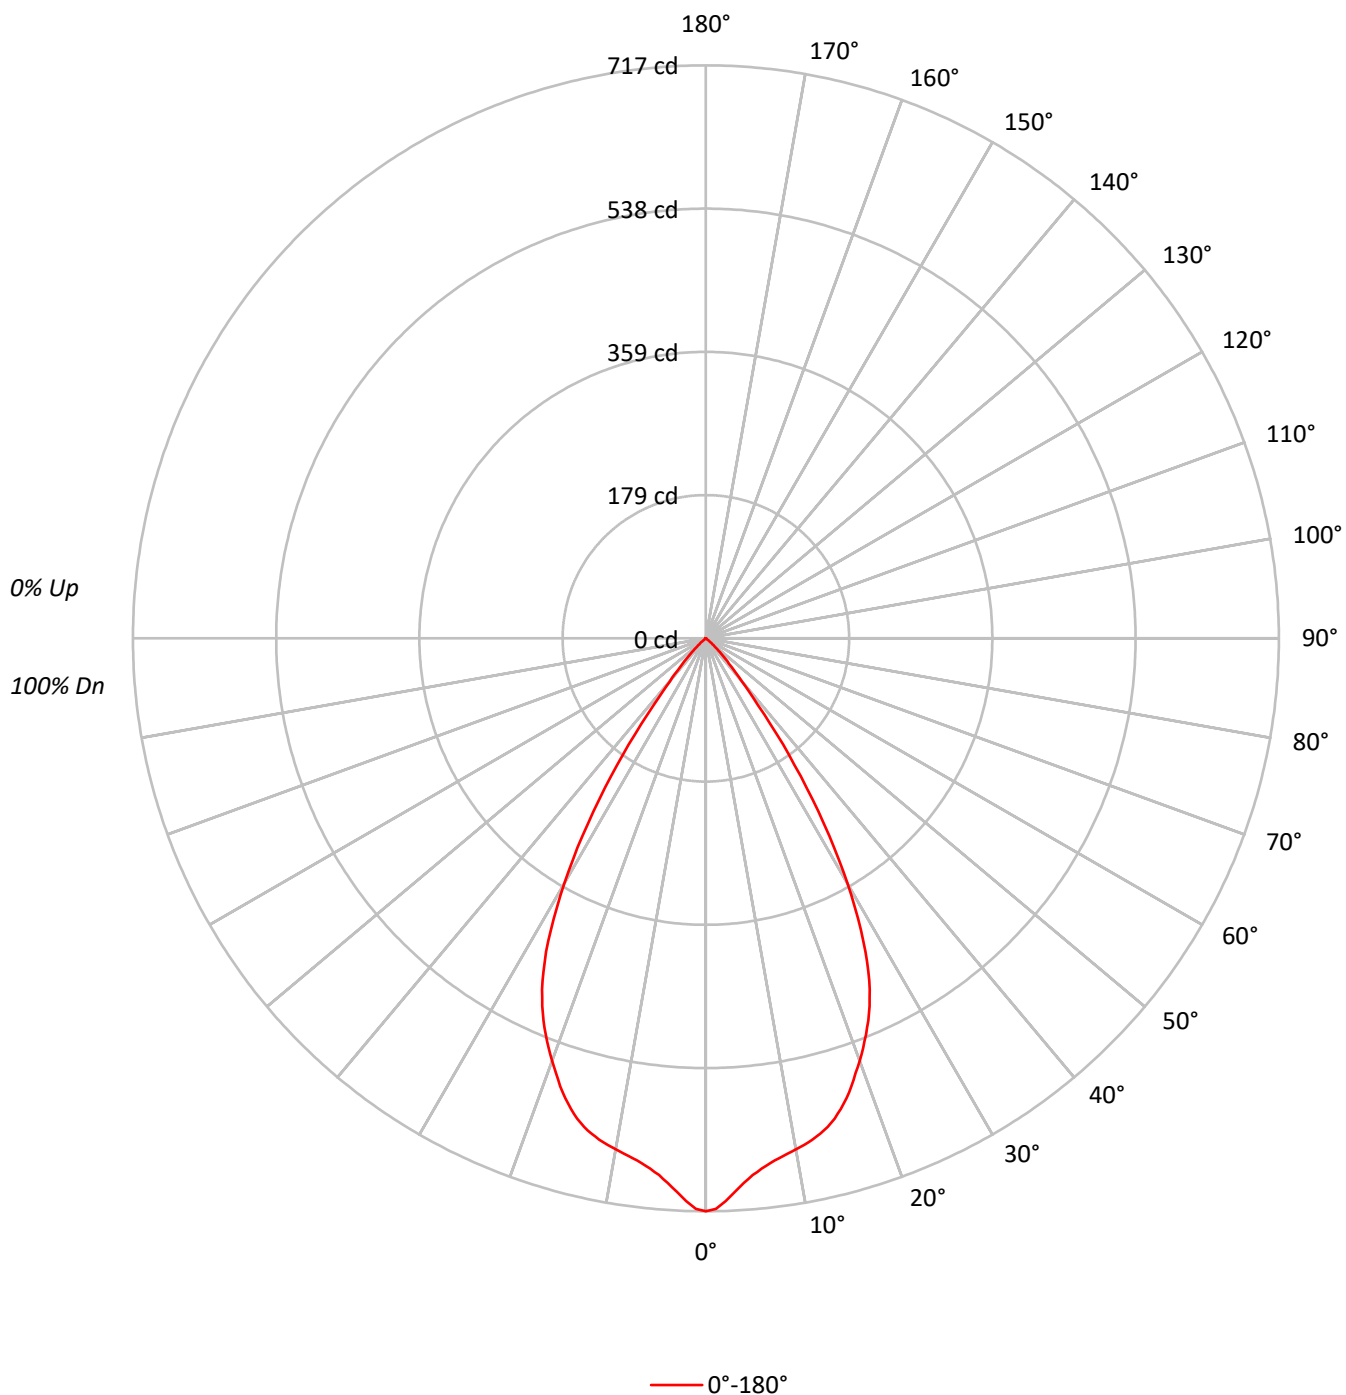

TEST NUMBER: P1251345

CATALOG NUMBER: P3AS05R609030DE010 E3D1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	111	109	106	111	109	107	105	105	103	102		101	100	99		98
2	108	104	100	96	106	102	98	95	99	96	93		96	93	91		93
3	103	97	92	88	101	96	91	88	93	89	86		91	87	85		88
4	98	91	85	81	96	90	85	81	88	83	80		86	82	79		84
5	93	85	80	75	92	84	79	75	83	78	74		81	77	74		79
6	89	80	74	70	87	79	74	70	78	73	70		77	72	69		75
7	85	76	70	66	83	75	69	65	74	69	65		72	68	65		71
8	81	71	65	61	79	71	65	61	70	65	61		69	64	61		68
9	77	67	62	58	76	67	61	58	66	61	57		65	61	57		64
10	73	64	58	54	72	63	58	54	63	58	54		62	57	54		61

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	157202
5°	148404
10°	144553
15°	141249
20°	131331
25°	117394
30°	89685
35°	51772
40°	20095
45°	8373
50°	1842
55°	268
60°	219
65°	104
70°	128
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 8373 cd/sqm

TEST NUMBER: P1251345

CATALOG NUMBER: P3AS05R609030DE010 E3D1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	63.6	10.6
10°-20°	173.3	28.9
20°-30°	217.1	36.2
30°-40°	121.3	20.2
40°-50°	23.1	3.8
50°-60°	1.2	0.2
60°-70°	0.2	0.0
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	454.0	75.7
0°-40°	575.4	95.9
0°-60°	599.6	99.9
0°-90°	599.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	599.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	717	
5°	674	64
15°	622	173
25°	485	217
35°	193	121
45°	27	23
55°	1	1
65°	0	0
75°	0	0
85°	0	0
90°	0	

TEST NUMBER: P1251345

CATALOG NUMBER: P3AS05R609030DE010 E3D1LI

CANDELA DISTRIBUTION (FULL):

0°	
0°	716.9
1°	714.0
2°	704.7
3°	693.6
4°	683.3
5°	674.2
6°	667.3
7°	661.5
8°	657.0
9°	652.9
10°	649.2
11°	645.5
12°	641.3
13°	636.2
14°	630.0
15°	622.2
16°	612.6
17°	601.8
18°	589.5
19°	575.6
20°	562.8
21°	549.0
22°	534.8
23°	519.8
24°	503.4
25°	485.2
26°	463.9
27°	440.1
28°	413.3
29°	384.8
30°	354.2
31°	323.2
32°	291.3
32.5°	273.9
33°	258.2
34°	225.6
35°	193.4
36°	164.4
37°	133.8
37.5°	119.8
38°	106.0
39°	85.4
40°	70.2
42.5°	42.7
45°	27.0



TEST NUMBER: P1251345

CATALOG NUMBER: P3AS05R609030DE010 E3D1LI

CANDELA DISTRIBUTION (continued):

	0°
47.5°	15.0
50°	5.4
52.5°	1.2
55°	0.7
57.5°	0.5
60°	0.5
62.5°	0.2
65°	0.2
67.5°	0.2
70°	0.2
72.5°	0.2
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)