

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1251377

Luminaire Tested: P3AS05R659030DE010 E3D1WMH

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1251377
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-16)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R659030DE010 E3D1WMH
Description: 3in Adjustable LED luminaire with, R65 optic, 3000K CCT AND, 90CRI , E3D1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 597.0 lumens
Efficiency: N/A
Efficacy: 82.9 lumens/watt
Spacing Criteria (0/90/45): 0.92 / 0.92 / 0.88
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1251377

CATALOG NUMBER: P3AS05R659030DE010 E3D1WMH

Luminous Intensity Polar Plot

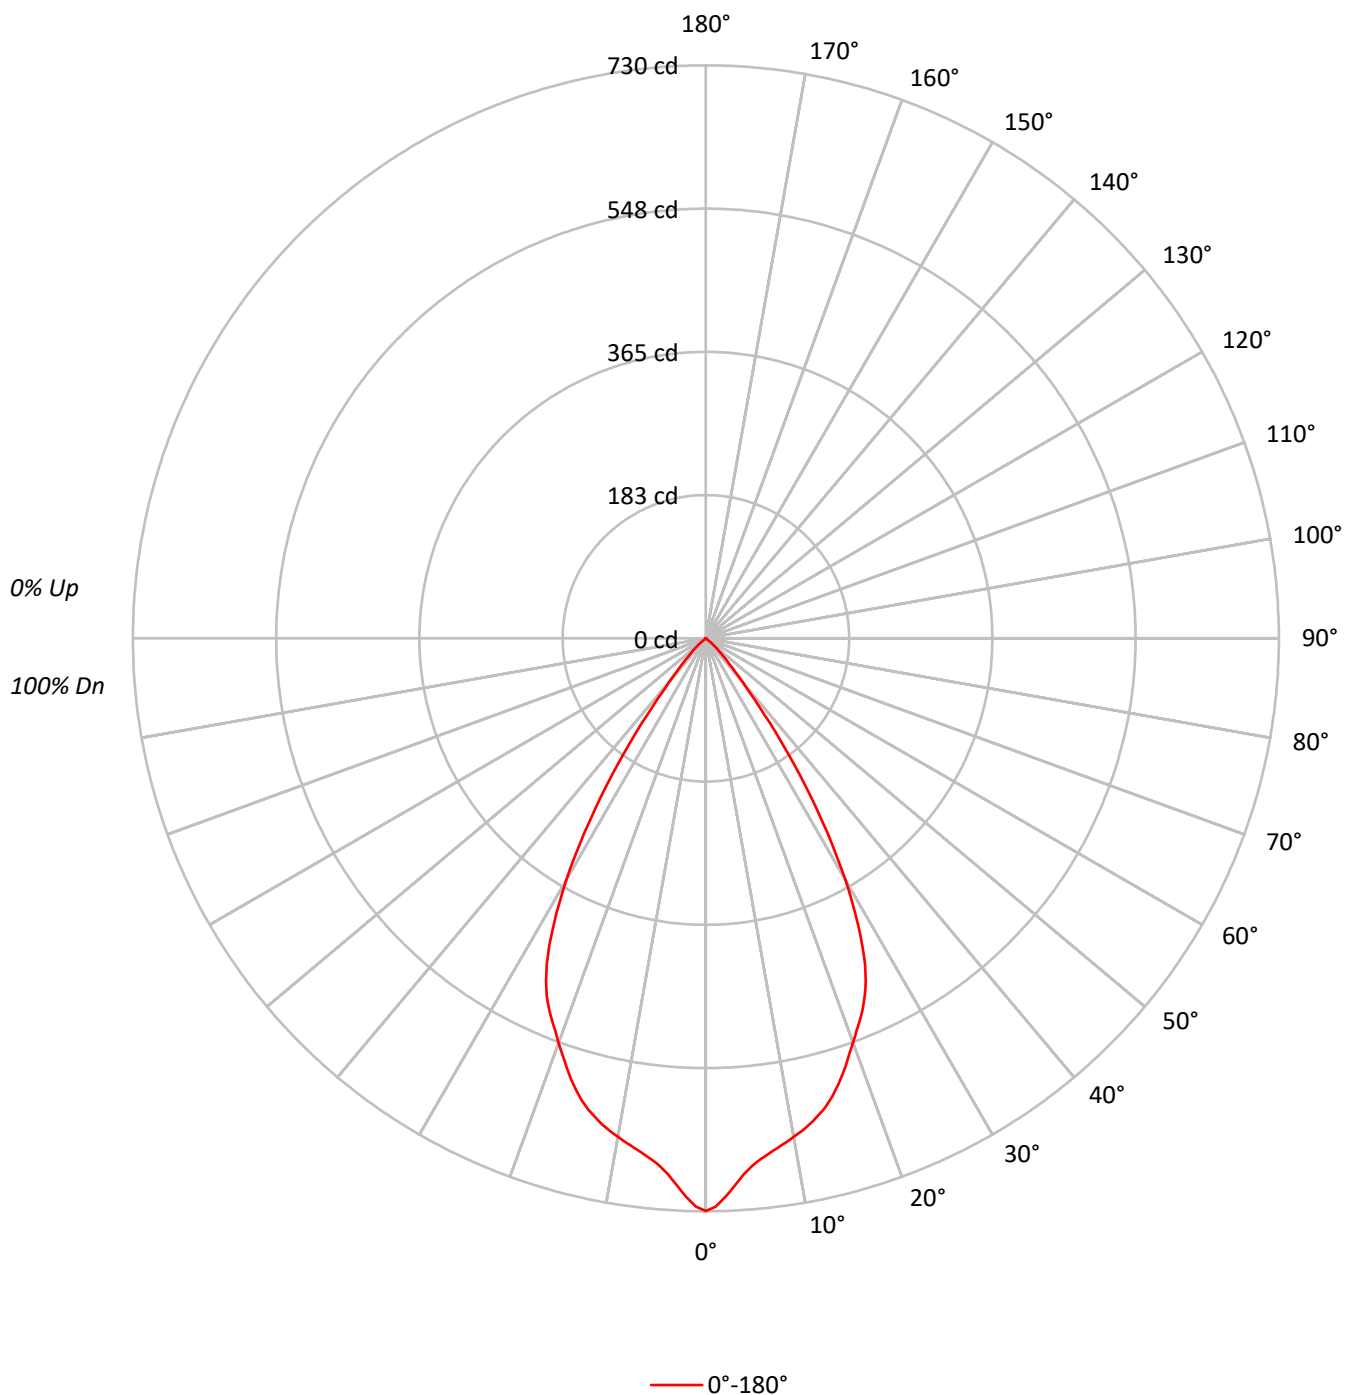

TEST NUMBER: P1251377

CATALOG NUMBER: P3AS05R659030DE010 E3D1WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	111	109	106	111	109	107	105	105	103	102		101	100	99		98
2	108	104	100	96	106	102	98	95	99	96	93		96	93	91		93
3	103	97	92	88	101	95	91	88	93	89	86		90	87	85		88
4	98	91	85	81	96	90	85	81	87	83	80		85	82	79		84
5	93	85	79	75	92	84	79	75	82	78	74		81	77	74		79
6	89	80	74	70	87	79	74	70	78	73	69		76	72	69		75
7	84	75	70	65	83	75	69	65	73	69	65		72	68	65		71
8	80	71	65	61	79	71	65	61	69	64	61		68	64	61		68
9	77	67	61	58	76	67	61	57	66	61	57		65	60	57		64
10	73	64	58	54	72	63	58	54	62	57	54		62	57	54		61

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	159965
5°	148536
10°	143640
15°	138434
20°	127971
25°	116595
30°	90090
35°	52227
40°	20725
45°	8838
50°	2081
55°	268
60°	219
65°	104
70°	128
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 8838 cd/sqm

TEST NUMBER: P1251377

CATALOG NUMBER: P3AS05R659030DE010 E3D1WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	63.6	10.7
10°-20°	169.9	28.5
20°-30°	215.0	36.0
30°-40°	122.5	20.5
40°-50°	24.3	4.1
50°-60°	1.2	0.2
60°-70°	0.3	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	448.6	75.1
0°-40°	571.0	95.7
0°-60°	596.6	99.9
0°-90°	597.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	597.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	730	
5°	675	64
15°	610	170
25°	482	215
35°	195	122
45°	28	24
55°	1	1
65°	0	0
75°	0	0
85°	0	0
90°	0	

TEST NUMBER: P1251377

CATALOG NUMBER: P3AS05R659030DE010 E3D1WMH

CANDELA DISTRIBUTION (FULL):

0°	
0°	729.5
1°	724.1
2°	712.3
3°	698.6
4°	685.1
5°	674.8
6°	667.2
7°	661.1
8°	655.7
9°	650.3
10°	645.1
11°	639.5
12°	633.6
13°	626.5
14°	618.9
15°	609.8
16°	599.0
17°	587.2
18°	574.4
19°	560.9
20°	548.4
21°	535.7
22°	524.1
23°	512.1
24°	498.1
25°	481.9
26°	462.5
27°	439.2
28°	413.0
29°	385.0
30°	355.8
31°	323.7
32°	291.8
32.5°	275.3
33°	259.4
34°	227.0
35°	195.1
36°	165.6
37°	136.4
37.5°	121.5
38°	109.4
39°	88.6
40°	72.4
42.5°	44.7
45°	28.5



TEST NUMBER: P1251377

CATALOG NUMBER: P3AS05R659030DE010 E3D1WMH

CANDELA DISTRIBUTION (continued):

	0°
47.5°	16.7
50°	6.1
52.5°	1.2
55°	0.7
57.5°	0.5
60°	0.5
62.5°	0.5
65°	0.2
67.5°	0.2
70°	0.2
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)